


CITY OF MESA
LANDSCAPE NOTES

1. ALL LANDSCAPE AREAS TO RECEIVE 2" LAYER DECOMPOSED GRANITE
 2. ALL LANDSCAPE AREA TO BE WATERED BY UNDERGROUND AUTOMATIC IRRIGATION SYSTEM.
 3. THE HEIGHTS AND CALIPERS SHALL COMPLY WITH 'ARIZONIA NURSERY ASSOCIATION SPECIFICATIONS' FOR THAT SIZE AND TYPE OF TREE.
 4. REQUIRED TREES SHALL BE PROVIDED IN EQUAL NUMBERS OF 15 GALLON SIZE AND 24" BOX SIZE OR LARGER.
 5. REQUIRED SHRUBS SHALL HAVE A MATURE GROWTH HEIGHT OF 18" AT LEAST 50% OF REQUIRE SHRUBS SHALL BE 5 GALLON SIZE.
 6. PLANT MATERIAL SHALL BE CALCULATED BASED ON A LINEAR MODULE OF 25 FEET. TREES AND SHRUBS MAY BE CLUSTERED.
- ARTERIAL STREET:
(2) TREES AND (6) SHRUBS PER 25' OF STREET FRONTAGE
- MAJOR, MIDSECTION COLLECTOR STREET:
(2) TREES AND (6) SHRUBS PER 25' OF STREET FRONTAGE
- COLLECTOR/INDUSTRIAL/COMMERCIAL STREET:
(1) TREES AND (4) SHRUBS PER 25' OF STREET FRONTAGE
- PUBLIC OR PRIVATE LOCAL STREET:
(1) TREES AND (4) SHRUBS PER 25' OF STREET FRONTAGE
7. PLANT MATERIAL SIZES REQUIRED:
TREES: (TOTAL REQUIRED TREES):
25% SHALL BE 36" BOX OR LARGER
50% SHALL BE 24" BOX OR LARGER
NO TREES LESS THAN 15 GALLON
- SHRUBS: (TOTAL REQUIRED SHRUBS):
50% SHALL BE 5 GALLON OR LARGER.
NO SHRUBS LESS THAN 1 GALLON
8. 1 TREES AND 3 SHRUBS FOR EVERY 15' PARKING ISLAND. PARKING SHALL BE INSTALLED @ EACH END OF ROW OF STALLS AND IN BETWEEN FOR MAXIMUM OF EIGHT CONTIGUOUS PARKING SPACES
9. FOUNDATION LANDSCAPING: LANDSCAPING TO A MINIMUM HEIGHT OF 18" IS REQUIRED IMMEDIATELY ADJACENT TO, OR PROVIDED IN PLANTER AREAS ADJACENT TO BUILDING, WHICH HAVE FRONTAGE ON A PUBLIC STREET. PLANTING AREAS MUST BE A MIN. OF 5' WIDE AND A MIN. OF 50% PLANT COVERAGE.
10. THE BACKFLOW PREVENTION ASSEMBLY SHALL BE TESTED AND APPROVED BY A CERTIFIED TECHNICIAN DESIGNATED IN THE CURRENT CITY OF MESA LIST THE APPROVED INSPECTORS PRIOR TO THE REQUEST FOR FINAL INSPECTION".
11. THE REQUIRED BACKFLOW PREVENTION ASSEMBLY SHALL BE MANUFACTURER AND MODEL NUMBER DESIGNATED IN THE CURRENT CITY OF MESA LIST OF APPROVED BACKFLOW PREVENTION ASSEMBLIES".
12. ALL WORK WILL BE DONE UNDER SEPARATE PERMIT FOR SIGNS".
13. ALL LANDSCAPING INSTALLED WITH THIS PROJECT TO BE MAINTAINED BY OWNERS ASSOC. OR OWNERS ASSOCIATION OF COMMERCIAL SUBDIVISION OR MANAGEMENT COMPANY IF COMMERCIAL RENTALS
14. THAT ALL TREES AND SHRUBS LOCATED IN LINE-OF-SIGHT WILL BE MAINTAINED TO A CLEAR AREA BETWEEN OF 3' TO 7'
15. RIP-RAP MUST BE ON NATURAL MATERIALS MATCHING D.G COLORS CONCRETE OR GUNITE MUST BE COLORED TO MATCH D.G. COLOR
16. TREES SHALL BE PLANTED @ LEAST 20' AWAY FROM ANY STREET LIGHT POLE OR LOCATION. SHRUBS SHALL BE PLANTED @ LEAST 7' FEET AWAY FROM ANY STREET LIGHT POLE OR LCC.
17. 10% OF TOTAL TREES IN PARKING SHALL BE 36" BOX OR LARGER.

LANDSCAPE LEGEND

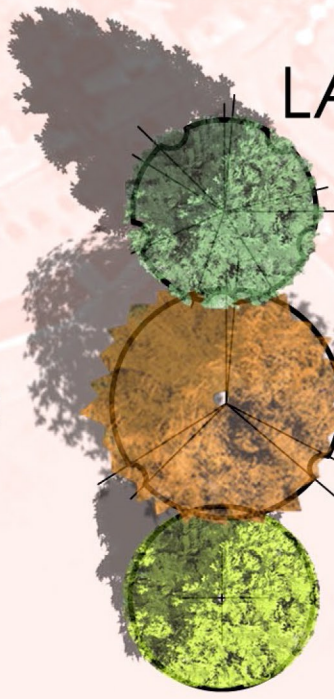

ULMUS PARVIFOLIA
CHINESE ELM
24" BOX (MATCHING)

OLEA EUROPEA 'SWAN HILL'
SWAN HILL
36" BOX

DALBERGIA SISSOO
SISSOO TREE
24" BOX



TECOMA 'ORANGE JUBILEE'
ORANGE JUBILEE
5 GALLON



HESPERALOE PARVIFLORA
RED YUCCA
5 GALLON



MUHLENBERGIA 'REGAL MIST'
REGAL MIST DEER GRASS
5 GALLON



DASYLIRION WHEELERII
DESERT SPOON
5 GALLON



RUELLIA PENINSULARIS
BAJA RUELLIA
5 GALLON



LANTANA MONTEVIDENSIS
'GOLD MOUND'
1 GALLON



LANTANA MONTEVIDENSIS
PURPLE TRAILING LANTANA
1 GALLON

MATCH EXISTING STREET FRONTAGE
DECOMPOSED GRANITE
2" DEPTH IN ALL LANDSCAPE AREAS

