


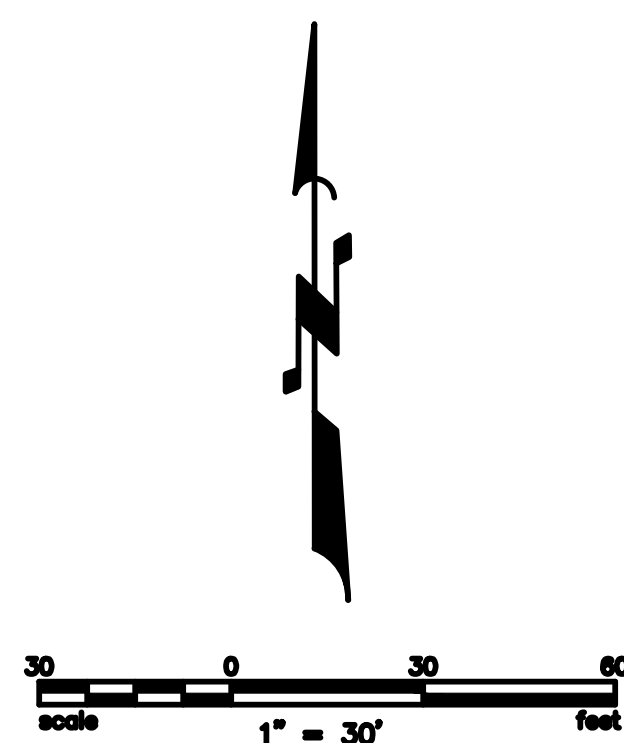

1	CONSTRUCT ASPHALT PAVEMENT.
2	CONSTRUCT 6" SINGLE CURB PER M.A.G. STD. DTL. 222, TYPE "A".
3	CONSTRUCT 6" VERTICAL CURB AND GUTTER PER M.A.G. STD. DTL. 220-1 TYPE "A".
4	CONSTRUCT SIDEWALK PER M.A.G. STD. DTL. 230. WIDTH PER PLAN.
5	CONSTRUCT DUMPSTER ENCLOSURE.
6	CONSTRUCT DRIVEWAY ENTRANCE PER C.O.M. STD. DTL. M-42.
7	CATCH BASIN PER M.A.G. STD. DTL. 535, TYPE "F".
8	INSTALL 10' UNDERGROUND RETENTION TANK.
9	INSTALL 15" HDPE STORM DRAIN PIPE, LENGTH PER PLAN.
10	INSTALL 12" HDPE STORM DRAIN PIPE EQUALIZER. SLOPE 0%, LENGTH PER PLAN.
11	CONSTRUCT MODIFIED 3' CURB TRANSITION PER M.A.G. STD. DTL. 220-1.
12	CONSTRUCT CURB TERMINATION PER M.A.G. STD. DTL. 222.
13	CONSTRUCT 3' VALLEY GUTTER PER M.A.G. STD. DTL. 240.

UNDERGROUND STORAGE WILL BE USED FOR ALL PROVIDED
RETENTION WITH 10% EXCESS.