


# 18" Cylinder LED Sconce

Decorative Outdoor – Wall Mount

Type: L24

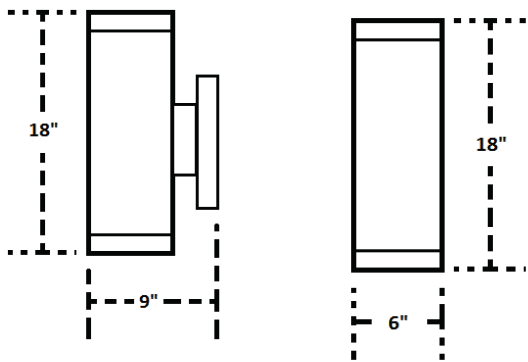

## Performance Summary

Distribution:	Uplight/Downlight
Initial Delivered Lumens:	2,400
Input Power:	29 watts
CRI:	90+ CRI
CCT:	3000K
Voltage:	120V, 60Hz
Dimmable:	Yes*
Finish:	Satin
Frame Material:	Metal
J-Box Type:	4X4 (standard)
Dimensions:	6.0"W X 18.0"H X 9.0"D
Compliance:	ETL, Title 24, and wet location listed when used with top cover
Warranty:	Contact factory for warranty information

\*Recommended Dimmers: Lutron – CT-600P, CTCL-153P, MACL-153M, S-600P, S-603P, SCL-153P, TGCL-153P; Leviton – 6631, 6674, IPL06

## Accessories

Field-Installed
Top Cover Lens (included with sconce) D0-LENS - Adapts up/down sconce to downlight distribution only

## Ordering Information

Product
CL-20364LEDD-SAT-CLR-SB

# Noctura Series

LED Wall Mount Luminaires

Type: L21 \*\*Special\*\*

Rev. Date: V4 02/26/2020

## Product Description

The Noctura® LED Wall Mount luminaire minimizes cost of ownership with easy installation, high performance and quality backed by a Cree Lighting 10-year limited warranty. The Noctura Series has a coordinated style across area, flood and wall mount luminaires to provide a consistent daytime appearance across a building site or campus. The rugged yet lightweight aluminum housing and mounting box are designed for easy installation of a variety of junction box styles (4" square, 3" and 4" octagonal, single gang (vertical or horizontal mounts). Luminaires (1L & 3L) allow for through-wired or conduit entry from the top, sides and rear. Luminaires (7L and higher) allow for through-wired or conduit entry from the top, bottom, sides and rear.

**Applications:** Ideal for both retrofit and new installation: building facade, security and general lighting applications.

## Performance Summary

**Lumen Output:** Up to 22,600 lumens

**Efficacy:** Up to 154 LPW


**CRI:** Minimum 70 CRI

**CCT:** 4000K and 5000K

**Limited Warranty\*:** 10 years on luminaire

\* See <http://creelighting.com/warranty> for warranty terms

7L

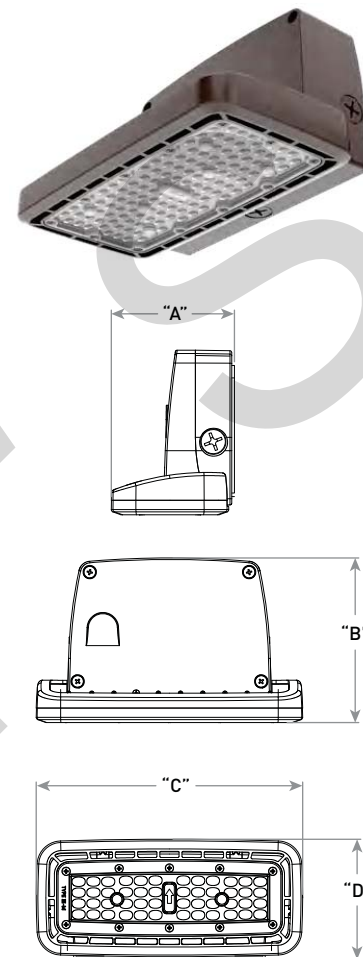

Lumen Package	Weight	Dim "A"	Dim "B"	Dim "C"	Dim "D"
1L*	2.2 lbs. (1.0kg)	3.7" (93mm)	5.4" (136mm)	8.7" (220mm)	3.6" (91mm)
3L*	3.0 lbs. (1.4kg)	4.0" (102mm)	5.4" (136mm)	8.7" (220mm)	3.9" (100mm)
7L*	4.6 lbs. (2.1kg)	6.5" (165mm)	5.4" (136mm)	9.8" (250mm)	6.4" (163mm)

\* See page 3 for large lumen package line drawings

## Ordering Information

Example: NTW-A-WM-T3-1L-40K-UL-BZ

NTW	A	WM	T3	3L	30K	UL	CS-P
Product	Version	Mounting	Optic	Lumen Package*	CCT	Voltage	Options
NTW	A	WM Wall Mount	T3 Type III Medium	<b>Small</b> <b>1L</b> 1,600 lumens - Not available in 347-480V <b>3L</b> 3,500 lumens <b>7L</b> 7,000 lumens	<b>Large</b> <b>11L</b> 11,000 lumens <b>17L</b> 17,000 lumens <b>23L</b> 23,000 lumens	<b>40K</b> 4000K <b>50K</b> 5000K	<b>UL</b> Universal 120-277V <b>UH</b> Universal 347-480V <b>CS</b> Silver Finish <b>P Button Photocell</b> - Available with UL voltage only

\* Lumen Package codes identify approximate light output only. Actual lumen output levels may vary depending on CCT and optic selection. Refer to Initial Delivered Lumen tables for specific lumen values



US: [creelighting.com](http://creelighting.com) (800) 236-6800

Canada: [creelighting-canada.com](http://creelighting-canada.com) (800) 473-1234

**CREE**  **LIGHTING**

## Product Specifications

### CONSTRUCTION & MATERIALS

- Luminaire housing is rugged die cast aluminum with integral, LED driver compartment is specifically designed for LED applications with advanced LED thermal management and driver
- Luminaire mounting box designed for easy installation of a variety of junction box styles: 4" square, 3" and 4" octagonal, single gang, vertical or horizontal mounts
- Luminaire can also be direct mounted to a wall and surface wired
- Direct mount to junction box with knockouts and grommet on back
- 11L, 17L and 23L housings have knockouts for additional mounting screws to provide added mounting stability (recommended)
- Luminaires (1L and 3L) allow for through-wired or conduit entry from the top, sides and rear
- Luminaires (7L and higher) allow for through-wired or conduit entry from the top, bottom, sides and rear
- Housing includes a knockout for field installed button type photocontrol (by others)
- Housing and mounting accessories finished in polyester powder coat paint, 2.5 mil nominal thickness
- Weight:** 1L-2.2 lbs. (1.0kg); 3L-3.0 lbs. (1.4kg); 7L-4.6 lbs. (2.1kg); 11L-8.2 lbs. (3.9kg); 17L-9.9 lbs. (5.5kg); 23L-12.8 lbs. (7.8kg)

### ELECTRICAL SYSTEM

- Input Voltage:** 120-277V or 347-480V, 50/60Hz
- Power Factor:** > 0.9 at full load
- Total Harmonic Distortion:** < 20% at full load
- Integral 10kV surge suppression protection standard
- When code dictates fusing, a slow blow fuse or type C/D breaker should be used to address inrush current
- Designed with 0-10V dimming capabilities. Controls by others
- 10V Source Current:** 0.20 mA
- Operating Temperature Range:** -30°C - +40°C (-22°F - +104°F)
- Snap connectors make wiring quick and simple

### REGULATORY & VOLUNTARY QUALIFICATIONS

- cULus Listed
- Suitable for wet locations
- Designed for downlight applications only
- Enclosure meets IP65 requirements per IEC 60529
- ANSI C136.2 10kV surge protection, tested in accordance with IEEE/ANSI C62.41.2
- Meets FCC Part 15, Subpart B, Class A limits for conducted and radiated emissions
- RoHS compliant. Consult factory for additional details
- DLC Premium qualified. Please refer to <https://www.designlights.org/search/> for most current information
- CA RESIDENTS WARNING:** Cancer and Reproductive Harm – [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

Electrical Data*								
Lumen Package	System Watts 120-277V	System Watts 347-480V	Total Current (A)					
			120V	208V	240V	277V	347V	480V
1L	12	N/A	0.12	0.07	0.06	0.05	N/A	N/A
3L	24	24	0.24	0.14	0.12	0.10	0.08	0.06
7L	46	46	0.46	0.27	0.23	0.20	0.16	0.12
11L	74	74	0.74	0.43	0.37	0.32	0.26	0.19
17L	111	111	1.11	0.64	0.56	0.48	0.38	0.28
23L	148	148	1.48	0.85	0.74	0.64	0.51	0.37

\* Electrical data at 25°C (77°F). Actual wattage may differ by +/- 10% when operating between 120-277V or 347-480V +/-10%


Noctura Series Ambient Adjusted Lumen Maintenance <sup>1</sup>					
Ambient	Initial LMF	25K hr Reported <sup>2</sup> LMF	50K hr Reported <sup>2</sup> LMF	75K hr Estimated <sup>3</sup> LMF	100K hr Estimated <sup>3</sup> LMF
5°C (41°F)	1.04	0.98	0.92	0.87	0.87
10°C (50°F)	1.03	0.97	0.91	0.86	0.86
15°C (59°F)	1.02	0.96	0.91	0.85	0.85
20°C (68°F)	1.01	0.95	0.90	0.84	0.84
25°C (77°F)	1.00	0.94	0.89	0.83	0.83
30°C (86°F)	0.99	0.93	0.88	0.83	0.83
35°C (95°F)	0.98	0.93	0.87	0.82	0.82
40°C (104°F)	0.97	0.91	0.85	0.80	0.80

<sup>1</sup> Lumen maintenance values at 25°C (77°F) are calculated per IES TM-21 based on IES LM-80 report data for the LED package and in-situ luminaire testing. Luminaire ambient temperature factors (LATF) have been applied to all lumen maintenance factors. Please refer to the [Temperature Zone Reference Document](#) for outdoor average nighttime ambient conditions.

<sup>2</sup> In accordance with IES TM-21, Reported values represent interpolated values based on time durations that are up to 6x the tested duration in the IES LM-80 report for the LED.

<sup>3</sup> Estimated values are calculated and represent time durations that exceed the 6x test duration of the LED.

## 17L

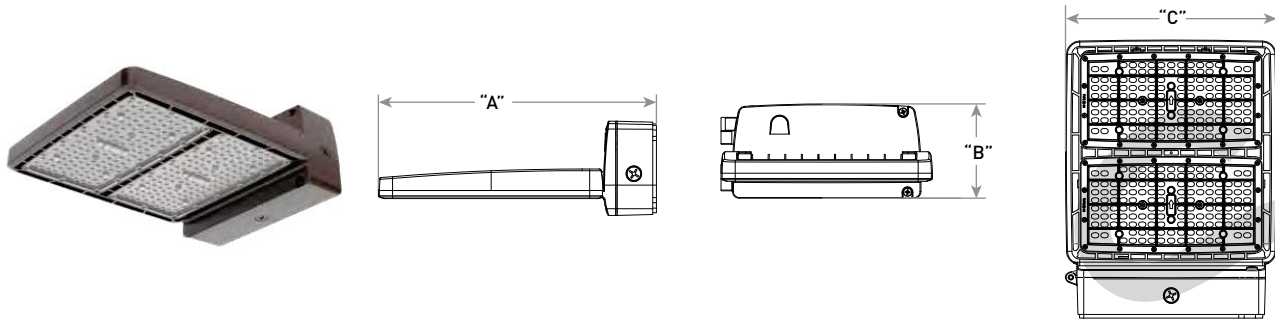


Lumen Package	Weight	Dim "A"	Dim "B"	Dim "C"
11L	8.2 lbs. [3.9kg]	12.19" [310mm]	5.51" [140mm]	12.36" [314mm]
17L	9.9 lbs. [5.5kg]	16.26" [413mm]	5.51" [140mm]	12.36" [314mm]
23L	12.8 lbs. [7.8kg]	20.30" [516mm]	5.51" [140mm]	12.36" [314mm]

## Photometry


All published luminaire photometric testing performed to IES LM-79-08 standards. To obtain an IES file specific to your project consult:

<https://creelighting.com/products/outdoor/wall-mount/noctura-wall>

## T3



Ningbo TengLi Testing Co. Test Report #:  
STD190155NB-BK  
NTW-A-WM-T3-23L-30K-UL-\*\*  
Initial Delivered Lumens: 21,664



NTW-A-WM-T3-23L-40K-UL-\*\*  
Mounting Height: 15' (4.6m) A.F.G.  
Initial Delivered Lumens: 22,600  
Initial FC at grade

## Type III Medium Distribution

Lumen Package	4000K/5000K	BUG Ratings** Per TM 15 11	Efficacy (LPW)
1L	1,580	B1 U0 G1	132
3L	3,370	B1 U0 G1	140
7L	6,750	B2 U0 G1	147
11L	11,175	B3 U0 G2	151
17L	17,100	B3 U0 G3	154
23L	22,600	B3 U0 G3	153

\* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens

\*\* For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit:

<https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>. Valid with no tilt

# CPY Series - Version B

CPY250® LED Canopy/Soffit Luminaire

Type: L22

Rev. Date: V16 03/02/2020

## Product Description

The CPY250® LED Canopy/Soffit Luminaire has an extremely thin profile constructed of rugged cast aluminum. It can be surface mounted easily from below the canopy deck and can be pendant mounted. Direct imaging of the LEDs is eliminated with a highly efficient patterned flat or 0.91" (23mm) drop glass lens.

**Applications:** Petroleum canopies, CNG fueling stations, soffits

## Performance Summary

Assembled in the U.S.A. of U.S. and imported parts

**Initial Delivered Lumens:** Up to 20,080

**Efficacy:** Up to 151 LPW

**CRI:** Minimum 70 CRI

**CCT:** 3000K (+/- 300K), 4000K (+/- 300K), 5700K (+/- 500K)

**Limited Warranty\*:** 10 years on luminaire/10 years on Colorfast DeltaGuard® finish

IP66 Rated (Direct Mount only)

Class I, Division 2 Hazardous Location for select models

\* See <http://creelighting.com/warranty> for warranty terms

## Accessories

Field-Installed	
<b>Direct Mount Luminaires</b> <b>Canopy Upgrade Kits (18 ga. steel, except where noted)</b> CPY-AP304* - for use with Cree Lighting CAN-304 luminaires, 16 ga. 5052 aluminum XA-BXCCMW - for use with Jet-Philips, 21.60" (549mm) square, white XA-BXCCNW - for use with Elco Franciscan, 22.06" (560mm) square, white XA-BXCCPW - for use with LSI Dakota or Masters, 22.50" (572mm) square, white XA-BXCCQW - for use with Whiteway Riviera or Rig-A-Lite, 20.60" (523mm) square, white XA-BXCCRW - for use with Elco Merrit, 18.06" (459mm) square, white XA-BXCCSW - for use with LSI Richmond or Whiteway Civic, 23.00" (584mm) L x 13.00" (330mm) W, white <b>Direct Mount Junction Box/Stem Kit</b> XA-BXCCJBX - 6.0" (152mm) H x 3/4" (19mm) NPT Stem - Watertight - Rated for feed through 8 (4 in, 4 out) #12 AWC conductors <b>Direct Mount Beauty Plates</b> XA-BXCCBPW - 26.17" (665mm) Beauty Plate Only (18 ga. steel), white XA-BXCCBPB12W - 26.17" (665mm) Beauty Plate (18 ga. steel) w/12" (305mm) Backer Plate (16 ga. steel), white - For use in canopies where deck opening is larger than what is required for mounting the CPY250 luminaire. Maximum deck opening 10.75" x 15" (183mm x 375mm) XA-BXCCBPB16W - 26.17" (665mm) Beauty Plate (18 ga. steel) w/16" (406mm) Backer Plate (16 ga. steel), white - For use in canopies where deck opening is larger than what is required for mounting the CPY250 luminaire. Maximum deck opening 12" x 15" (305mm x 375mm)	<b>Pendant Mount Luminaires</b> <b>Pendant Mount Kits</b> XA-PS12KIT* - 5" (127mm) pendant XA-PS18KIT* - 11" (279mm) pendant XA-PS22KIT* - 15" (381mm) pendant - Includes two conduit fittings and 3/4-14 NPT pipe threaded on two ends <b>Hand-Held Remote</b> XA-SENSREM - For successful implementation of the programmable multi-level option, a minimum of one hand-held remote is required

\* Must specify color: BK (Black), BZ (Bronze), SV (Silver) or WH (White)

## Ordering Information

Example: CPY250-B-DM-D-A-UL-SV

CPY250	B	DM	F	C	UL	CS	30K	MOD-29W (Special)
Product	Version	Mounting	Optic	Lumen Package/ Input Power Designator	Voltage	Color Options	CCT	Options
CPY250	B	DM Direct HC Hook & Cord PD Pendant	D 0.91" (23mm) Drop Lens F Flat Lens	A 60W 13L 91W B 96W C 31W E 145W F 85W	UL Universal 120-277V UH* Universal 347-480V - Available with B, E & F input power designators only - Must specify either 34 or 48 voltage with 13L, A and C 34* 347V - Available with 13L lumen package and A & C input power designators only 48* 480V - Available with 13L lumen package and A & C input power designators only	BK Black BZ Bronze CS Silver WH White	30K 3000K 40K 4000K 57K 5700K	<b>DIM 0-10V Dimming</b> - Control by others - Refer to Dimming spec sheet for details - Can't exceed wattage of specified lumen package/ Input Power Designator <b>HZ Class I, Div. 2 Hazardous Location Certification</b> - Available with DM and PD mounts only - A & C input power designators are available for DM and PD mounts except PD mount with 34 & 48 voltages in Canada - Not available with K or PML options <b>K NSF 2 Certification</b> - Luminaires include NSF certification mark - Available with the DM mount only - Not available with the HZ or PML options <b>PML Programmable Multi-Level</b> - Available with UL voltage only - Refer to PML spec sheet for details

\* 13L lumen package and A & C input power designators utilize a magnetic step-down transformer. For input power for 347 and 480V, refer to the Electrical Data table


## DM Mount



Flat Lens



Drop Lens

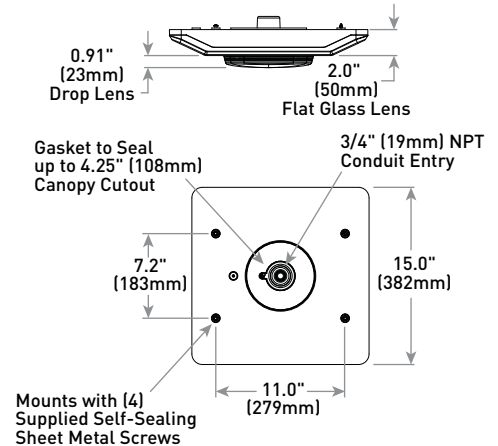

## Weight

12.5 lbs. (5.7kg)



**CREE LIGHTING**

US: [creelighting.com](http://creelighting.com) T (800) 236-6800

Canada: [creelighting-canada.com](http://creelighting-canada.com) T (800) 473-1234

## CPY250® LED Canopy/Soffit Luminaire - Version B

### Product Specifications

#### CONSTRUCTION & MATERIALS

- Slim, low profile design
- Easy mounting and servicing from below the deck
- Luminaire housing is constructed of rugged cast aluminum with integral heat sink specifically designed for LED
- Flat lens is 0.125" tempered Solite® glass
- Drop lens is 0.157" molded borosilicate glass
- Direct mount is suitable for use in single or double skin canopies with a minimum 4.0" (102mm) wide panels and a minimum 22 gauge, 0.030" (0.7mm) canopy thickness
- Direct mount luminaire mounts directly to the canopy deck with the drilling of a single 2" to 4" (51mm to 102mm) round hole, is secured in place with self-sealing screws that provide a weathertight seal and includes 3/4" (19mm) conduit entry for direct wire feed
- Hook and cord mount includes a 3' (0.91m) cord out of the luminaire and is intended to hang from the single hook
- Standard pendant mount includes a mounting bracket and a J-Box for customer wiring and is intended to be mounted by 3/4 IP pendant (by others)
- Hazardous location pendant mount has a threaded hub which accepts 3/4" NPT conduit (by others) and secures with a 1/4"-20 set screw
- Exclusive Colorfast DeltaGuard® finish features an E-Coat epoxy primer with an ultra-durable powder topcoat, providing excellent resistance to corrosion, ultraviolet degradation and abrasion. Black, bronze, silver and white are available
- **Weight:** 12.5 lbs. (5.7kg)

#### ELECTRICAL SYSTEM

- **Input Voltage:** 120-277V or 347-480V, 50/60Hz, Class 1 drivers
- **Power Factor:** > 0.9 at full load
- **Total Harmonic Distortion:** < 20% at full load
- Integral 6kV surge suppression protection standard
- When code dictates fusing, a slow blow fuse or type C/D breaker should be used to address inrush current

#### CONTROLS

- Continuous dimming to 10% with 0-10V DC control protocol
- **10V Source Current:** 0.15mA
- Use only lighting controls with neutral connection or controls intended for use with LED fixtures
- Reference LED Dimming spec sheet for additional dimming information

#### REGULATORY & VOLUNTARY QUALIFICATIONS

- cULus Listed
- Suitable for wet locations when ordered with DM and DM mount with HZ option. Covered ceiling required only when not used with cULus Listed, wet location junction box or XA-BXCCJBBOX accessory
- Suitable for damp locations when ordered with HC and PD mounts. Designed for indoor use only
- Suitable for wet locations when ordered with PD mount and HZ option
- Enclosure rated IP66 per IEC 60529 when ordered with DM mount. Exceptions apply when HZ option is selected
- Consult factory for CE Certified products
- 6kV surge suppression protection tested in accordance with IEEE/ANSI C62.41.2
- Meets FCC Part 15, Subpart B, Class A limits for conducted and radiated emissions
- Luminaire and finish endurance tested to withstand 5,000 hours of elevated ambient salt fog conditions as defined in ASTM Standard B 117
- Meets Buy American requirements within ARRA
- RoHS compliant. Consult factory for additional details
- Class I, Division 2 Hazardous Location rated when ordered with the DM or PD mount and the HZ option. A & C input power designators are available for DM and PD mounts except PD mount with 34 & 48 voltages in Canada. Not available with K or PML options. Rated for Groups A, B, C & D. Bears a T3C (160° C) temperature classification within a 25° C ambient
- NSF Certified when ordered with DM mount and K option. Not available with HZ or PML options. Refer to <http://info.nsf.org/Certified/Food/> for additional details
- DLC and DLC Premium qualified versions available. Please refer to <https://www.designlights.org/search/> for most current information
- Dark Sky Friendly, IDA Approved when ordered with 30K CCT and Flat Lens (F). Please refer to <https://www.darksky.org/our-work/lighting/lighting-for-industry/fsa/fsa-products/> for most current information
- **CA RESIDENTS WARNING:** Cancer and Reproductive Harm – [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

Electrical Data*							
Lumen Package/ Input Power Designator	System Watts 120-277V	System Watts 347-480V; 347/480V	Total Current (A)				
			120V	208V	240V	277V	347V 480V
A	60	68	0.51	0.29	0.25	0.22	0.20 0.14
13L	91	102	0.79	0.45	0.39	0.34	0.30 0.21
B	96	96	0.82	0.47	0.40	0.35	0.28 0.20
C	31	33	0.26	0.15	0.13	0.11	0.10 0.07
E	145	145	1.22	0.70	0.61	0.53	0.42 0.30
F	85	85	0.72	0.41	0.36	0.31	0.24 0.18

\* Electrical data at 25°C (77°F). Actual wattage may differ by +/- 10% when operating between 120-277V or 347-480V +/- 10%

CPY Series (Version B) Ambient Adjusted Lumen Maintenance <sup>1</sup>						
Ambient	Lumen Package/ Input Power Designator	Initial LMF	25K hr Reported <sup>2</sup> LMF	50K hr Reported <sup>2</sup> LMF	75K hr Estimated <sup>3</sup> LMF	100K hr Estimated <sup>3</sup> LMF
5°C (41°F)	A/B/C/E/F	1.03	1.00	0.96	0.93	0.90
	13L	1.04	1.01	1.00	0.98	0.97
10°C (50°F)	A/B/C/E/F	1.02	0.99	0.95	0.92	0.89
	13L	1.03	1.00	0.99	0.97	0.96
15°C (59°F)	A/B/C/E/F	1.02	0.99	0.95	0.92	0.89
	13L	1.02	0.99	0.98	0.96	0.95
20°C (68°F)	A/B/C/E/F	1.01	0.98	0.95	0.91	0.88
	13L	1.01	0.98	0.97	0.95	0.94
25°C (77°F)	A/B/C/E/F	1.00	0.97	0.94	0.90	0.87
	13L	1.00	0.97	0.96	0.94	0.93
30°C (86°F)	A/B/C/E/F	0.99	0.96	0.93	0.90	0.87
	13L	0.99	0.96	0.95	0.93	0.92

<sup>1</sup> Lumen maintenance values at 25°C (77°F) are calculated per IES TM-21 based on IES LM-80 report data for the LED package and in-situ luminaire testing. Luminaire ambient temperature factors (LATF) have been applied to all lumen maintenance factors. Please refer to the [Temperature Zone Reference Document](#) for outdoor average nighttime ambient conditions.

<sup>2</sup> In accordance with IES TM-21, Reported values represent interpolated values based on time durations that are up to 6x the tested duration in the IES LM-80 report for the LED.

<sup>3</sup> Estimated values are calculated and represent time durations that exceed the 6x test duration of the LED.

Operating Temperature Range			
Lumen Package/ Input Power Designator	Direct Mount to Plywood	Direct Mount to Sheet Metal/ Suspended	Class 1, Division 2 Hazardous Location
			Direct Mount to Plywood      Direct Mount to Sheet Metal/Suspended
A	-40°C to +40°C	-40°C to +45°C	-40°C to +25°C
13L/B	-40°C to +35°C	-40°C to +40°C	
C	-40°C to +45°C	-40°C to +50°C	
E	-40°C to +35°C	-40°C to +40°C	
F	-40°C to +40°C	-40°C to +45°C	


**WARNING:** Exceeding maximum operating temperature may result in thermal foldback

## Photometry

All published luminaire photometric testing performed to IES LM-79-08 standards.

To obtain an IES file specific to your project consult: <http://creelighting.com/products/outdoor/canopy-and-soffit/cpy-series>


### DROP LENS



CESTL Test Report #: PL08412-001A

CPY250-B-\*\*-D-B-UL-\*\*-57K

Initial Delivered Lumens: 12,403



CPY250-B-\*\*-D-B-UL-\*\*-57K

Mounting Height: 15' (4.6m) A.F.G.

Initial Delivered Lumens: 12,860

Initial FC at grade


### Drop Lens Distribution

Lumen Package/ Input Power Designator	3000K		4000K		5700K	
	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
A	7,250	B3 U2 G1	7,600	B3 U2 G1	7,720	B3 U2 G1
13L	11,900	B3 U2 G1	12,800	B3 U2 G1	12,825	B3 U2 G1
B	11,850	B3 U2 G1	12,380	B3 U2 G1	12,860	B3 U2 G1
C	4,210	B2 U2 G1	4,420	B2 U2 G1	4,520	B2 U2 G1
E	19,100	B4 U3 G2	19,600	B4 U3 G2	20,080	B4 U3 G2
F	11,850	B3 U2 G1	12,380	B3 U2 G1	12,860	B3 U2 G1

\* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens

\*\* For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>


### FLAT LENS



CESTL Test Report #: PL08165-001C

CPY250-B-\*\*-F-B-UL-\*\*-57K

Initial Delivered Lumens: 13,040



CPY250-B-\*\*-F-B-UL-\*\*-57K

Mounting Height: 15' (4.6m) A.F.G.

Initial Delivered Lumens: 12,860

Initial FC at grade


### Flat Lens Distribution

Lumen Package/ Input Power Designator	3000K		4000K		5700K	
	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
A	7,250	B3 U0 G1	7,600	B3 U0 G1	7,720	B3 U0 G1
13L	11,900	B3 U0 G1	12,800	B3 U0 G1	12,825	B3 U0 G1
B	11,850	B3 U0 G1	12,380	B3 U0 G1	12,860	B3 U0 G1
C	4,210	B2 U0 G1	4,420	B2 U0 G1	4,520	B2 U0 G1
E	19,100	B4 U0 G1	19,600	B4 U0 G1	20,080	B4 U0 G1
F	11,850	B3 U0 G1	12,380	B3 U0 G1	12,860	B3 U0 G1


\* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens

\*\* For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>


## HC Mount

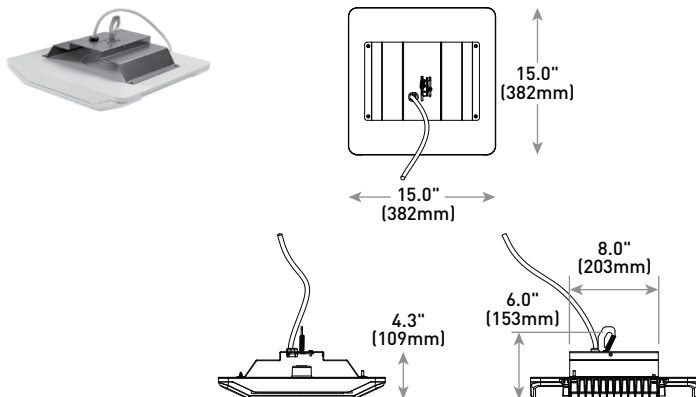

## PD Mount

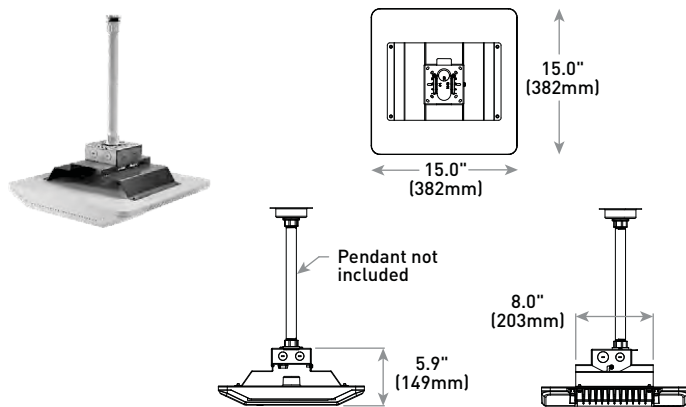

## PD Mount w/HZ Option

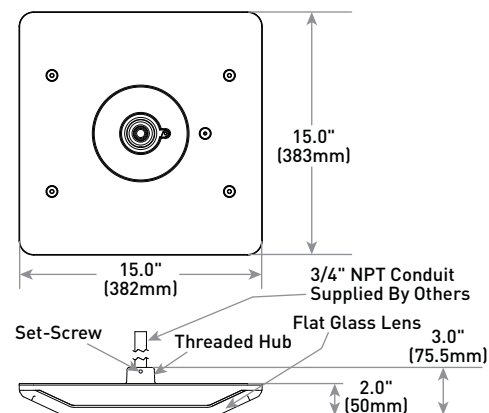



# AL Series

Exterior LED Uplight/Downlight Wall Sconce

Type: L23

## Performance Summary

**Initial Delivered Lumens:** Up to 2,255 lumens

**System Watts:** 45 watts

**CCT:** 3000K (+/- 300K), 5700K (+/- 500K) standard

**CRI:** Minimum 70 CRI (5700K); 80 CRI (3000K)

**Input Voltage:** 120V



**Finish:** Bronze, Silver with Gray Band

**Construction:** Die cast aluminum housing

**Dimensions:** 16.0"W X 15.0"H X 10.0"D

**Compliance:** cULus listed, suitable for wet locations

**Warranty:** 10 year limited warranty. For warranty information, contact factory

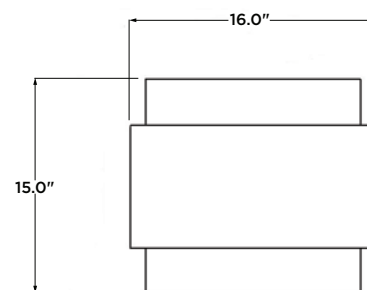

## Accessories

Field-Installed
<b>Louver Kits</b> RS9062-DO-BZ& - Bronze louver kit to convert sconce to downlight distribution only RS9062-DO-CS& - Silver louver kit to convert sconce to downlight distribution only

## Ordering Information

Example: AL-42WLED-UD-120-BZ

Product	Distribution	Voltage	Finish	Option
AL-42WLED	UD Uplight/Downlight	120 120 Volt	BZ Bronze CG Silver with Gray Band	30K - Minimum 80 CRI - Color temperature per sconce

Performance Data			
Finish	Wattage	CCT	Lumen Output
BZ	45W	30K	1,140
		57K	1,490
CG		30K	1,710
		57K	2,255



© 2017 Cree, Inc. and/or one of its subsidiaries. All rights reserved. For informational purposes only. Content is subject to change. The UL logo is a registered trademark of UL LLC.

**CREE**   
T (800) 236-6800 F (262) 504-5415