




EAST ELEVATION

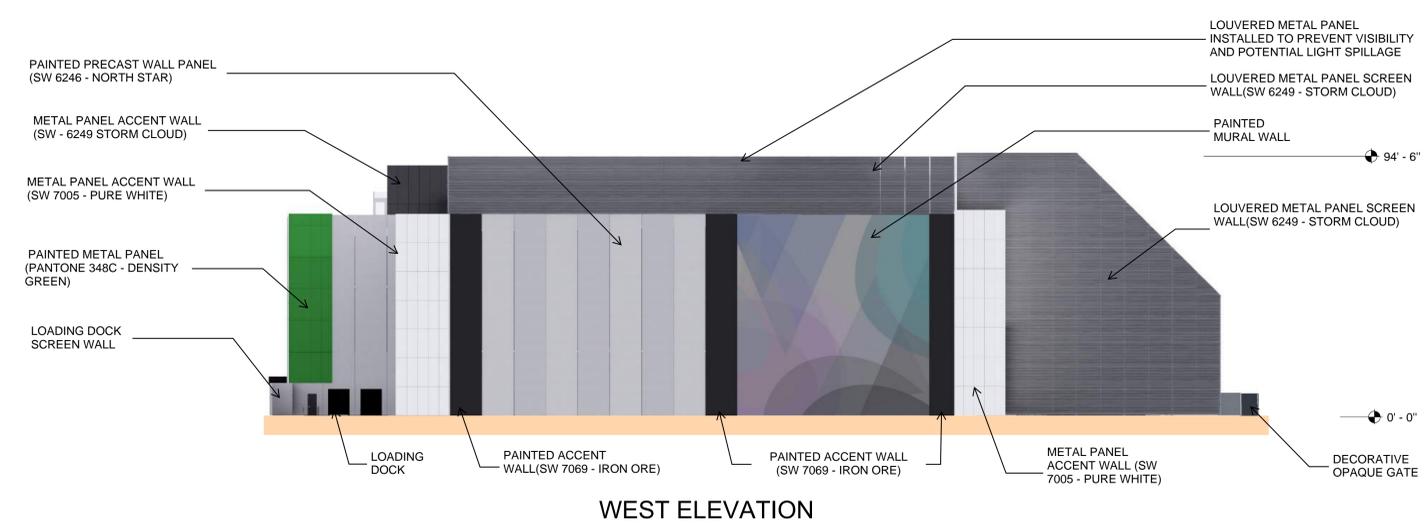


WEST ELEVATION

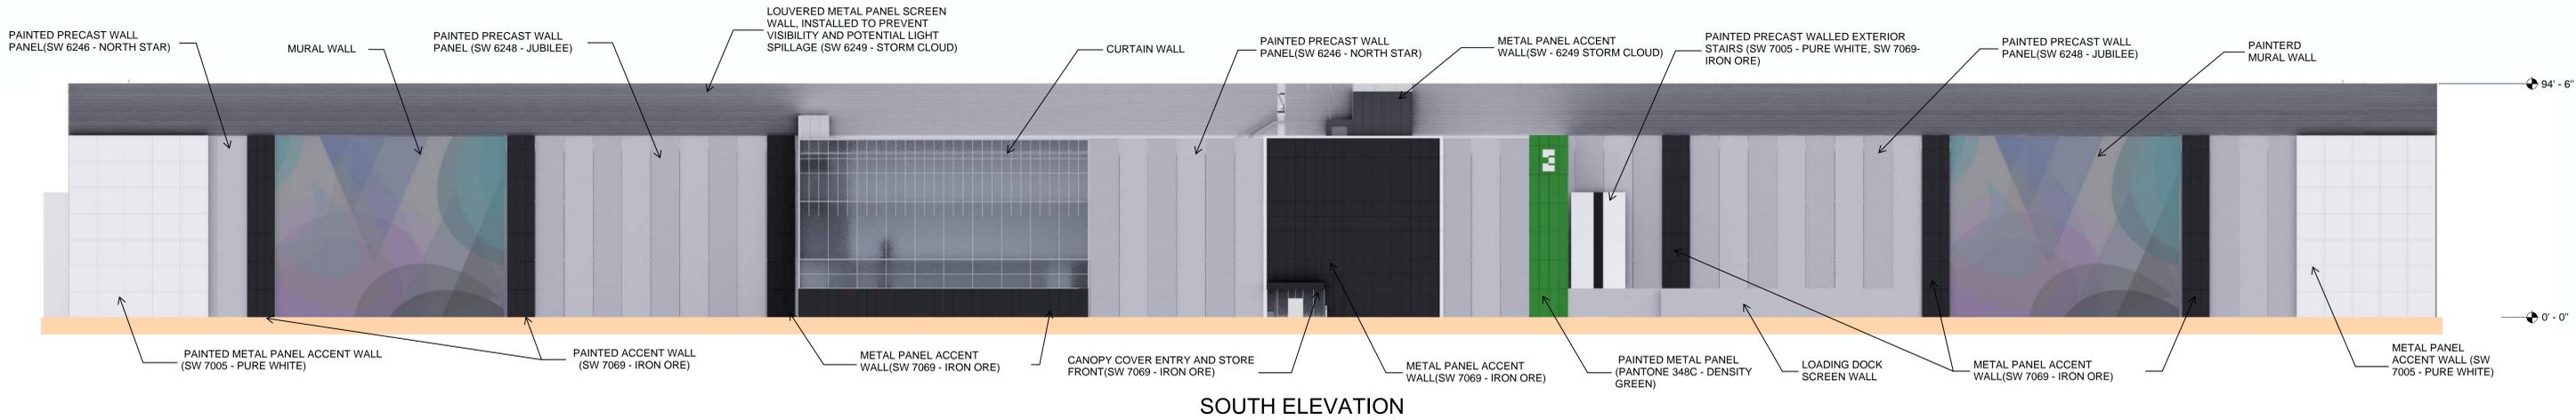


SOUTH ELEVATION

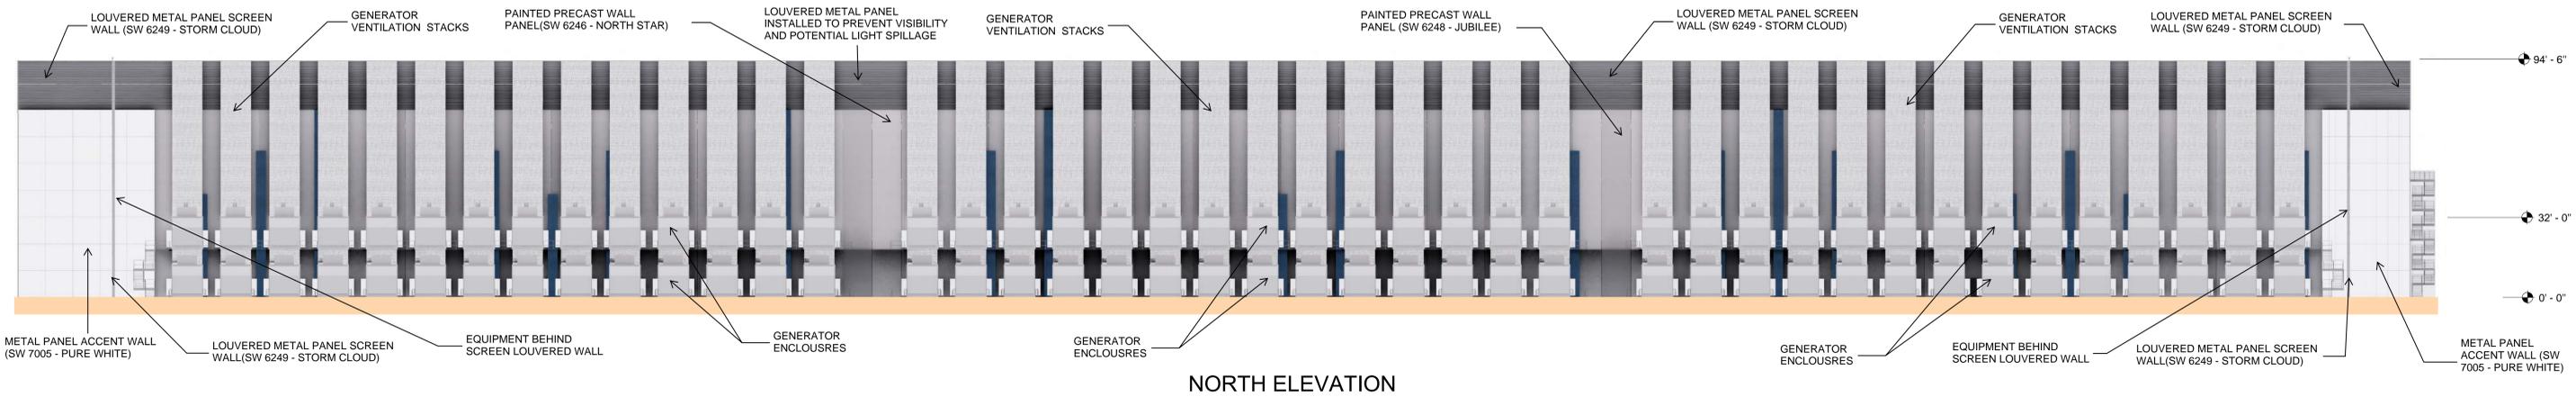


NORTH ELEVATION

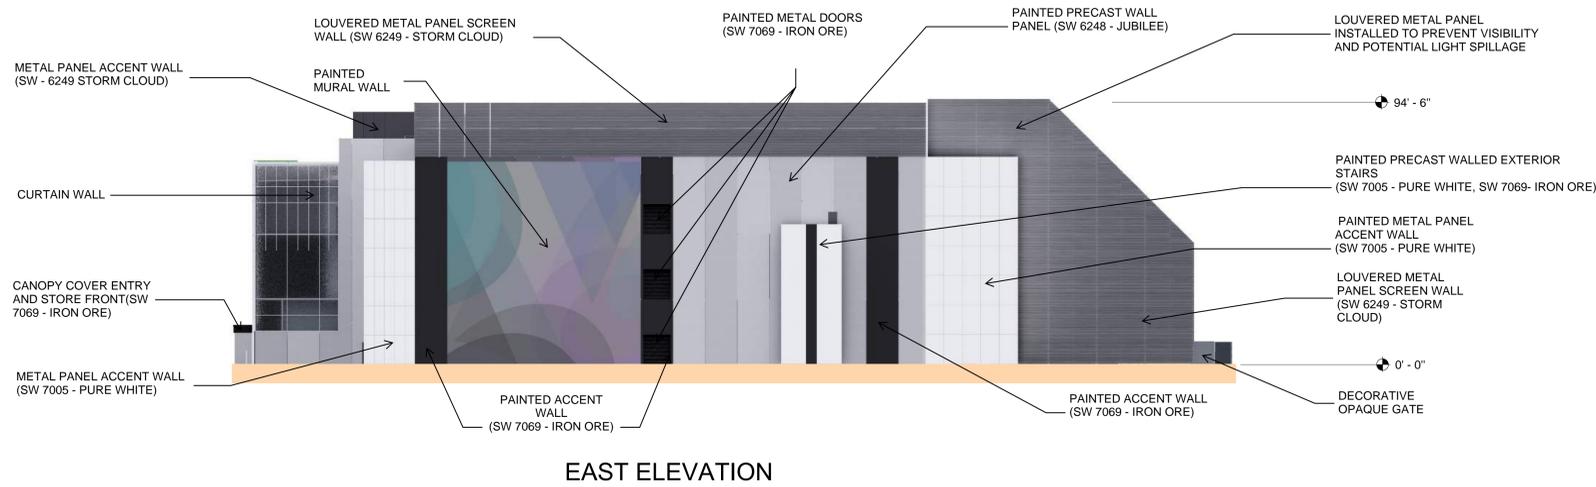


EAST ELEVATION

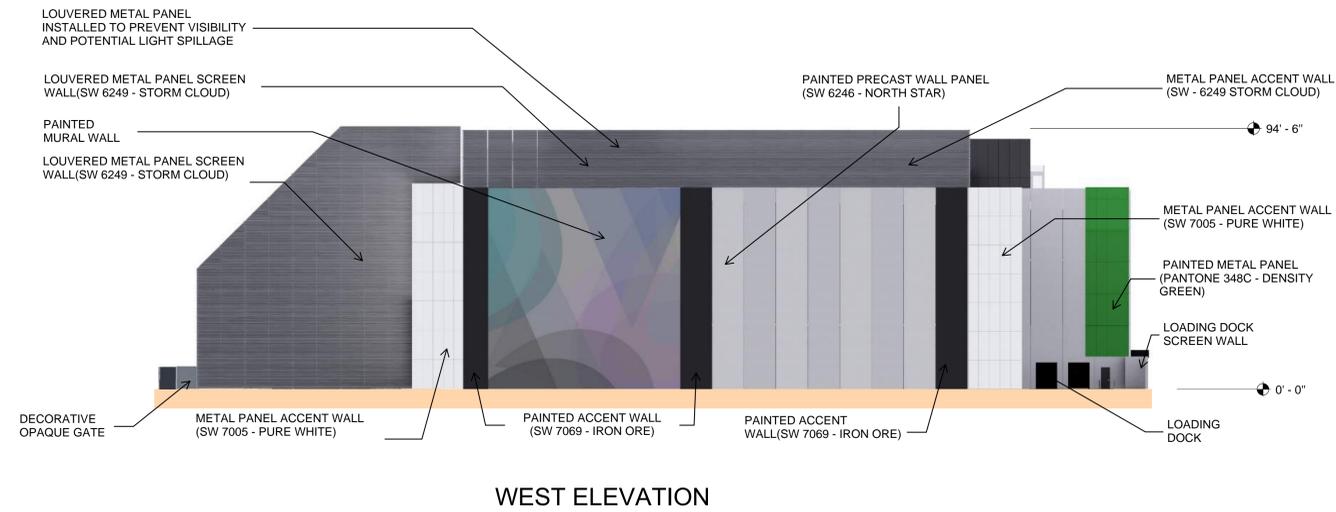

WEST ELEVATION

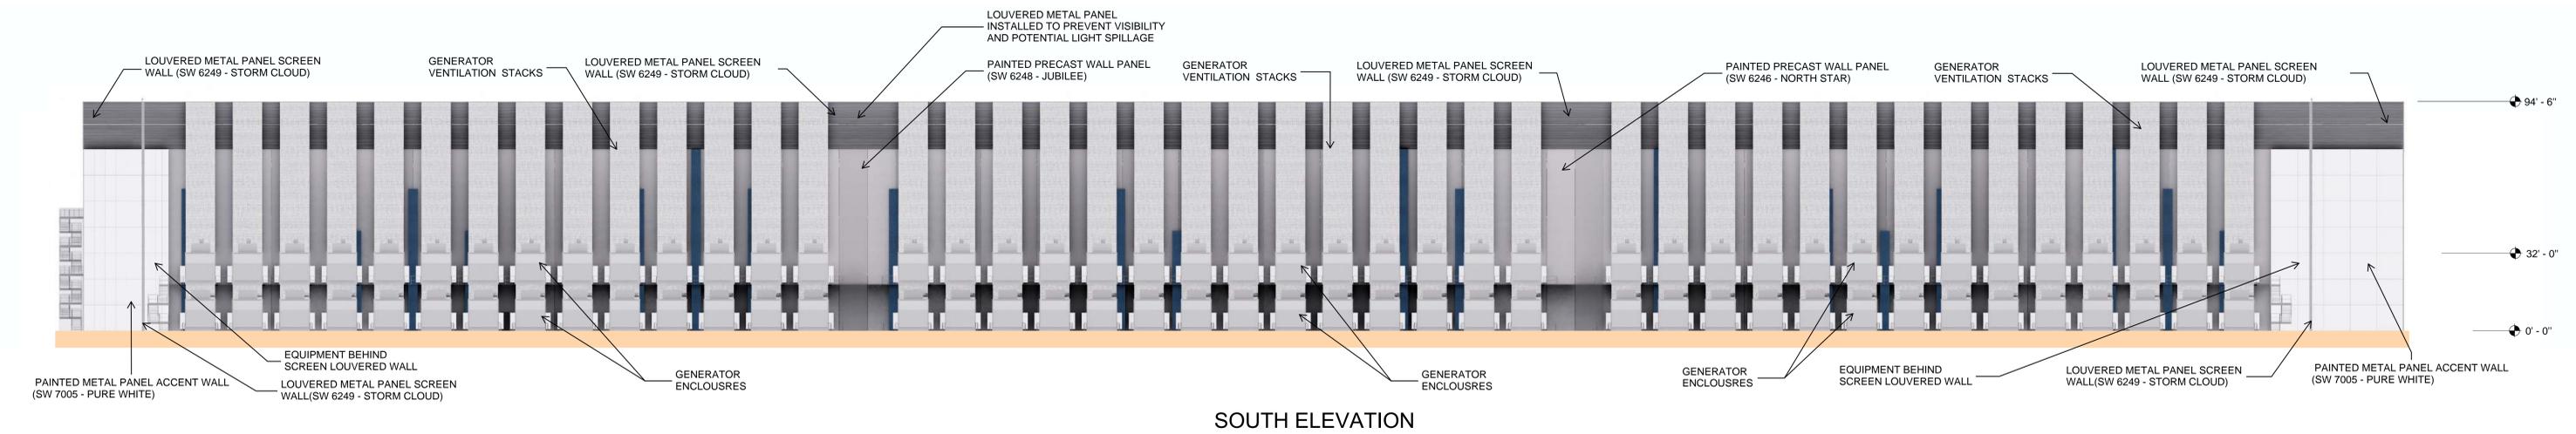

SOUTH ELEVATION

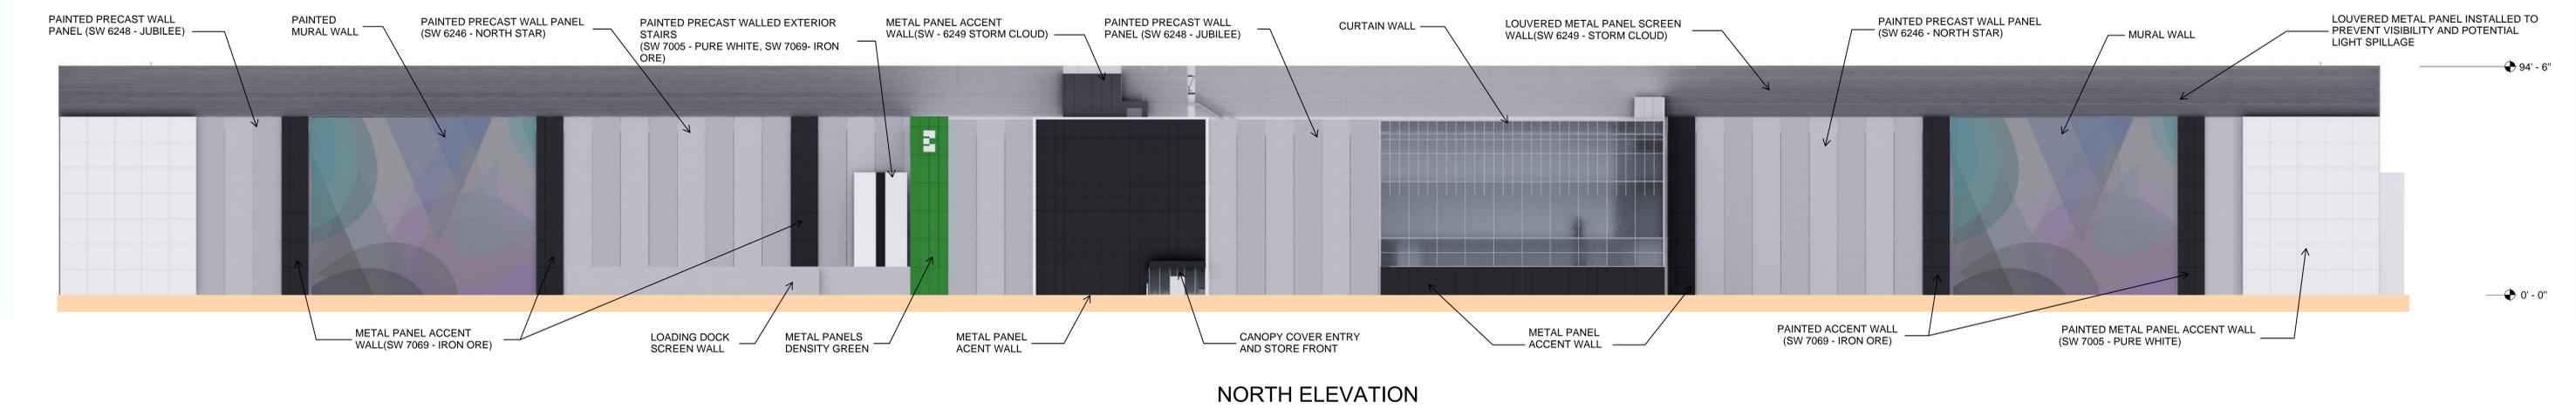


NORTH ELEVATION







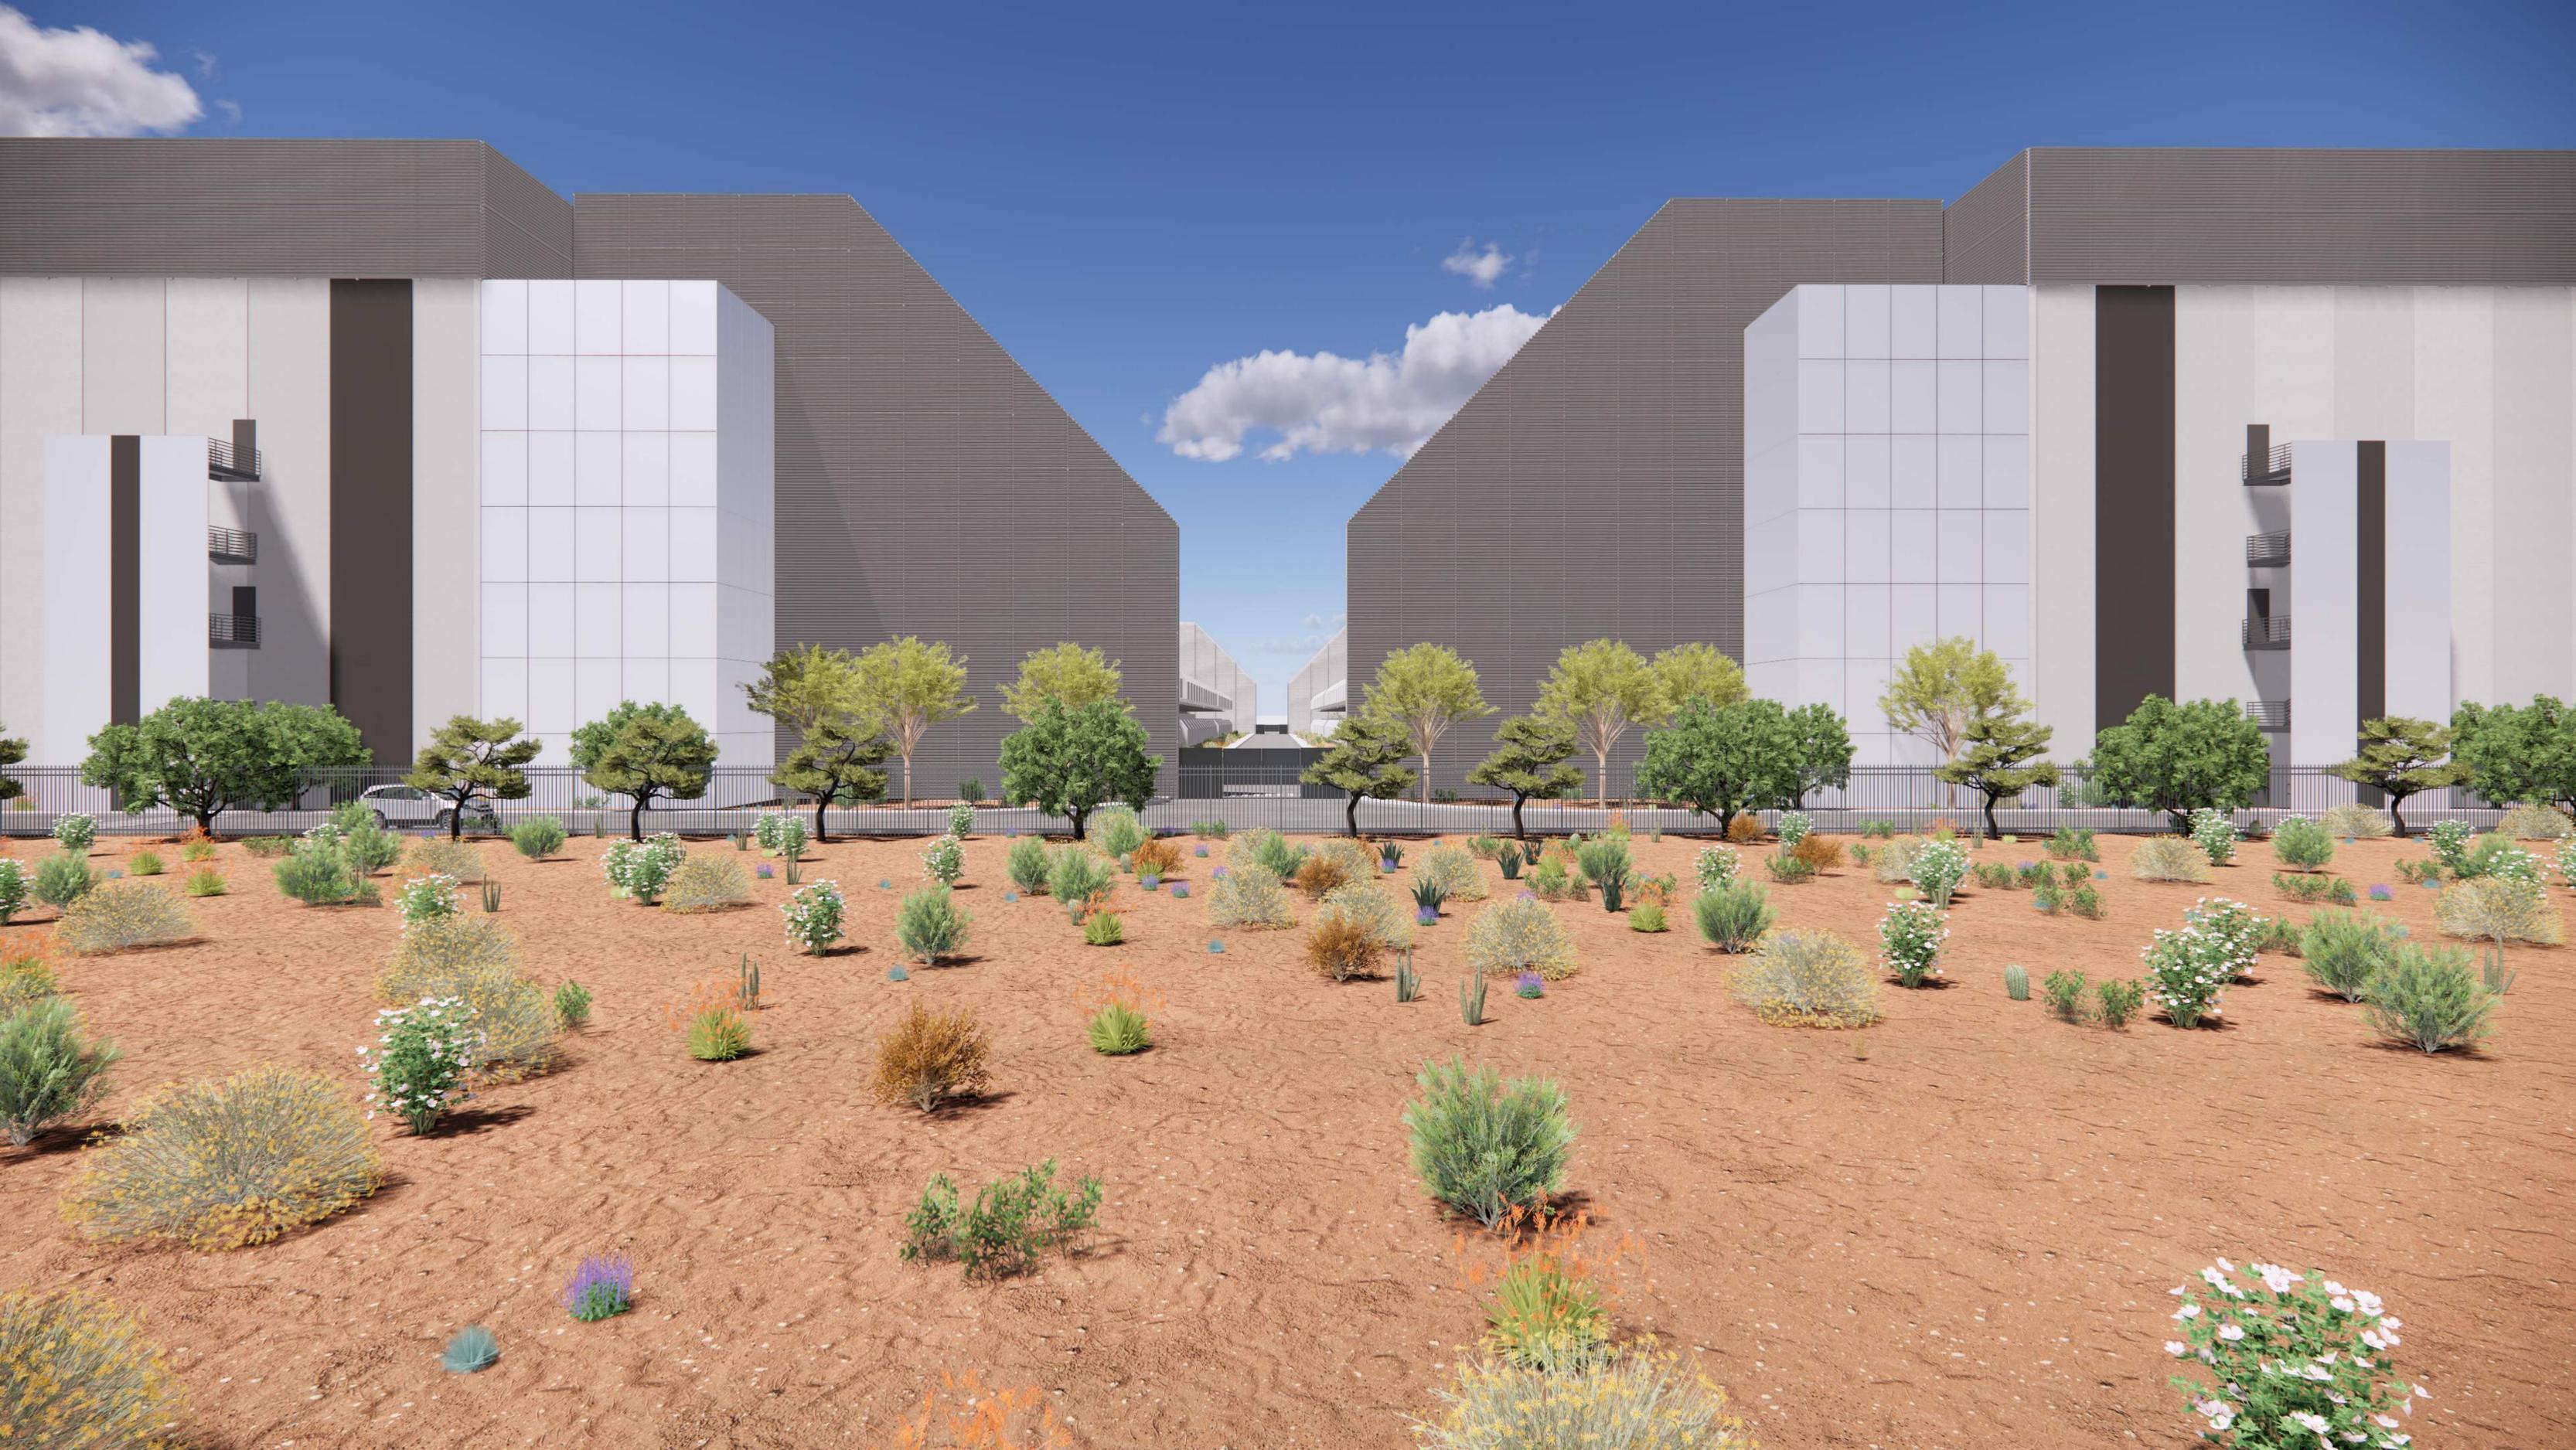












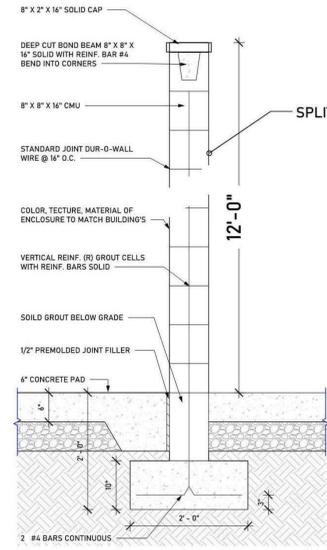

7 SCREENWALL SECTION
1/2" = 1'-0"

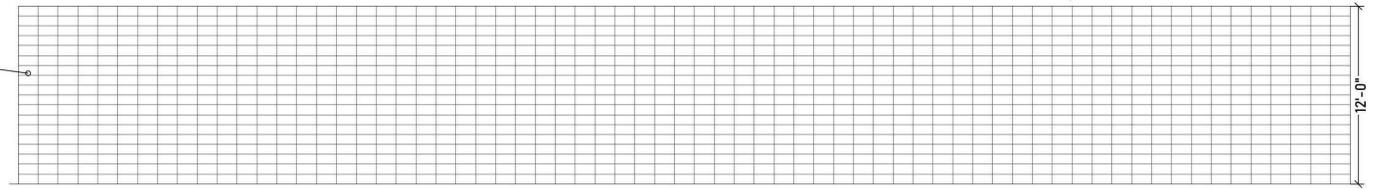


8 SCREENWALL AT PH06 LOADING - ELLIOT RD ELEVATION
1/4" = 1'-0"

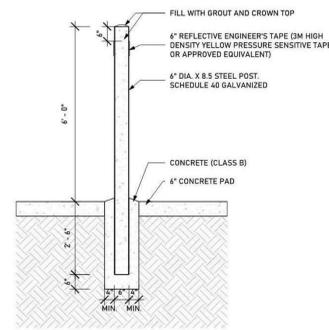


4 SAFETY POST DETAIL.
1/2" = 1'-0"

BIN ENCLOSURE NOTES


- TRASH AND RECYCLING BIN AREA SHALL BE SCREENED WITH A SIX FOOT (6') MASONRY WALL PER CITY OF MESA DETAIL M-42.04.1
- BIN ENCLOSURES SHALL HAVE (3) 4" DIAMETER STEEL SAFETY POSTS INSTALLED IN THE BACK OF THE ENCLOSURE ONLY PER CITY OF MESA DETAIL M-42.04.1
- SAFETY POSTS SHALL HAVE A HEIGHT OF 6 FEET OR BE EQUAL TO THE HEIGHT OF THE BACK SCREEN WALL OF THE ENCLOSURE. SAFETY POSTS SHALL BE PLACED A MINIMUM OF 4' FROM THE WALL.
- USE CLASS "A" CONCRETE AS PER SECTION 725 EXCEPT AS NOTED IN SAFETY POST DETAIL ON CITY OF MESA DETAIL M-42.04.1.
- STEEL REINFORCEMENT SHALL BE GRADE 40
- EXPANSION JOINT FILLER SHALL BE 1/2" BITUMINOUS TYPE PREFORMED EXPANSION JOINT FILLER ASTM D-1751.
- EXTERIOR FINISH OF 6 FOOT MASONRY SCREEN WALLS SHALL BE COORDINATED ARCHITECTURALLY WITH PRIMARY BUILDING FINISHES.
- SOIL BELOW THE WALL FOOTER AND CONCRETE PAD SHALL BE COMPACTED TO A DEPTH OF 6 INCHES AND TO A MINIMUM DRY DENSITY OF 95% IN ACCORDANCE WITH ASTM D-2933 AND D-3017 AFTER ADJUSTMENT FOR ROCK CORRECTION.
- SOLID WASTE CONTAINERS TO COMPLY WITH CITY OF MESA COM SOLID WASTE STANDARDS M-42.01 THRU M-42.04.2

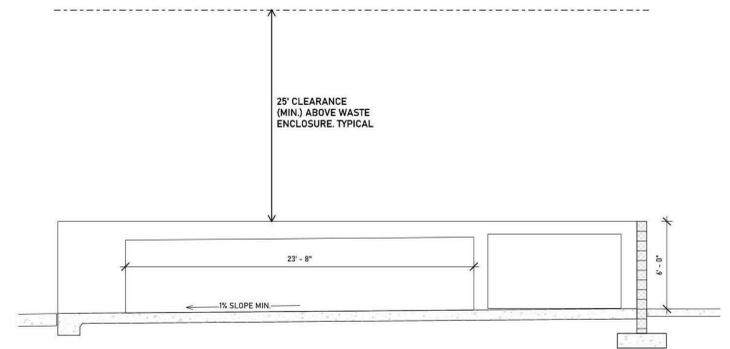


2 SECTION THROUGH LARGE COMPACTOR REFUSE SCREENWALL
1/4" = 1'-0"

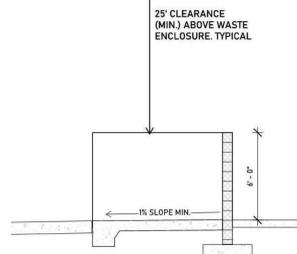


6 SECTION THROUGH RECYCLED WASTE AREA
1/4" = 1'-0"

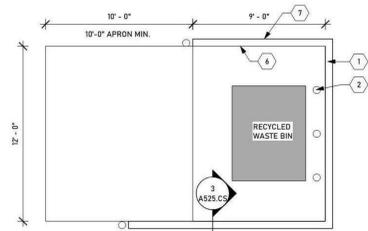

5 RECYCLED WASTE AREA
1/4" = 1'-0"

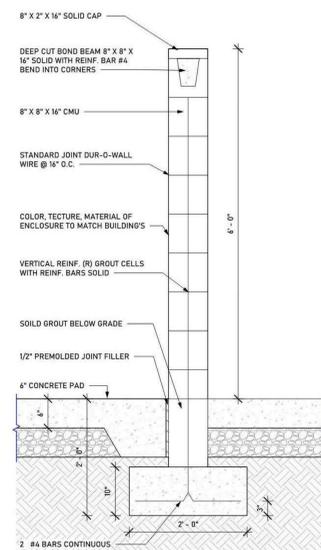

3 SECTION THROUGH BIN ENCLOSURE SCREENWALL.
1" = 1'-0"

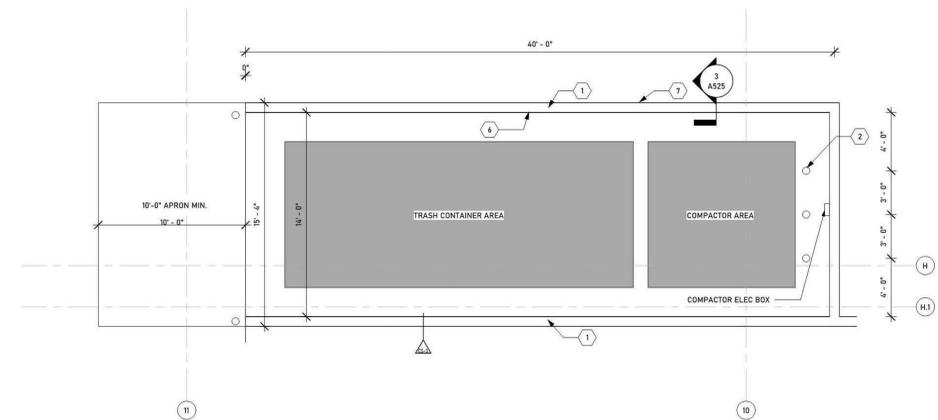

1 LARGE COMPACTOR REFUSE AREA
1/4" = 1'-0"