

LEGEND

- 42" A.F.G. HIGH MASONRY SCREEN WALL
- 5'-0" WIDE MIN. ACCESS - ROUTE
- COVERED PARKING
- 6'-0" FULL HEIGHT (AND OR) RETAINING WALL

OPEN AREA = 104,210 SF (25%)
BUILDING AREA = 114,224 SF (25%)
ASPHALT AND CONCRETE AREA = 238,884 SF (52%)

EASTMARK 2.0 - AMENITIES PROVIDED:
POOL
SPA
PICKLE BALL
BBQ
PET PARK
CORNHOLE
TOT LOT

CITY MESA TRASH ENCLOSURE CALCULATION:
270 UNITS * 0.5 CU YD / WK = 135 CU YARDS REQUIRED
135 / 4 CU YARDS PER DUMPSTER = 34 DUMPSTERS (OR)
12 DUMPSTERS AT TWICE WEEKLY PICK UPS
TOTAL DUMPSTERS PROVIDED = 14
RECYCLE BINS NOT CONSIDERED IN ABOVE DATA

CITY MESA TRASH ENCLOSURE CALCULATION:
270 UNITS * 0.5 CU YD / WK = 135 CU YARDS REQUIRED
135 / 4 CU YARDS PER DUMPSTER = 34 DUMPSTERS (OR)
12 DUMPSTERS AT TWICE WEEKLY PICK UPS
TOTAL DUMPSTERS PROVIDED = 14
RECYCLE BINS NOT CONSIDERED IN ABOVE DATA

PEDESTRIAN CONNECTIVITY SHALL BE PROVIDED AT SITES PUBLIC WAY TO ADJOINING SITES, CONSISTENT WITH THE INTENT OF DU 3/4 DUP.
solid waste calculations:
total waste containers on site: 15
capacity of each container: 6 cu. yard
total capacity of refuse: 90 cu. yards
required capacity per unit: 0.5 cu. yards per resident / week
total required capacity: (270 units * 0.5 cu. yd) = 135 cu. yd. service to be provided twice weekly, or as needed

CONSTRUCTION NOTES:
Place the following code required construction, alteration, and demolition notes on the construction documents:

"Comply with all provisions and requirements of Mesa Building Code (MBC) Chapter 33 - Safeguards During Construction, Mesa Fire Code (MFC) Chapter 33 - Fire Safety During Construction and Demolition, and NFPA 241 for Items not specifically addressed by MFC Chapter 33."

"Fire apparatus access roads are essential during construction to allow emergency response to the site for both fire and medical emergencies. Access roads shall be in place prior to the start of vertical construction. It is important to develop access roads at an early stage of construction to allow for fire department access to the site in the case of fire or injury."



"Required fire apparatus access road during construction or demolition shall comply with Mesa Fire and Medical Department standard detail FPD 3310.1. The access road shall be a minimum of 20 feet wide of all-weather driving surface, graded to drain standing water and engineered to bear the imposed loads of fire apparatus (78,000 lbs. / 24,000 lbs. front axle, 54,000 lbs. rear axle) when roads are wet. The access road shall extend to within 200 feet of any combustible materials and/or any location on the jobsite where any person(s) shall be working for a minimum of four (4) continuous hours in any day. A clearly visible sign marked "Fire Department Access", in red letters, shall be provided at the entry to the access road.

All open trenches shall have steel plates capable of maintaining the integrity of the access road design when these trenches cross an access road.

These access roads may be temporary or permanent. This policy applies only during construction and/or demolition. Permanent access per the MFC shall be in place prior to any final inspection or certificate of occupancy."

"Water supply for fire protection. An approved water supply for construction site shall meet the requirements of Appendix Chapters B and C. The minimum fire flow requirement when contractor or developer brings combustible materials on site is 1,500 gpm at 20 psi. At least one fire hydrant shall be within 500 feet of any combustible material and capable of delivering the minimum fire flow requirement. This hydrant or hydrants may be either temporary or permanent as the project schedule permits.

In addition, there are times when hydrants and valves must be closed temporarily for repair work or construction of the water system. The developer/contractor is responsible for ensuring that the water supply is always available. When the work is complete, developer/contractor shall make sure that the fire hydrants are active, and the valves are open."

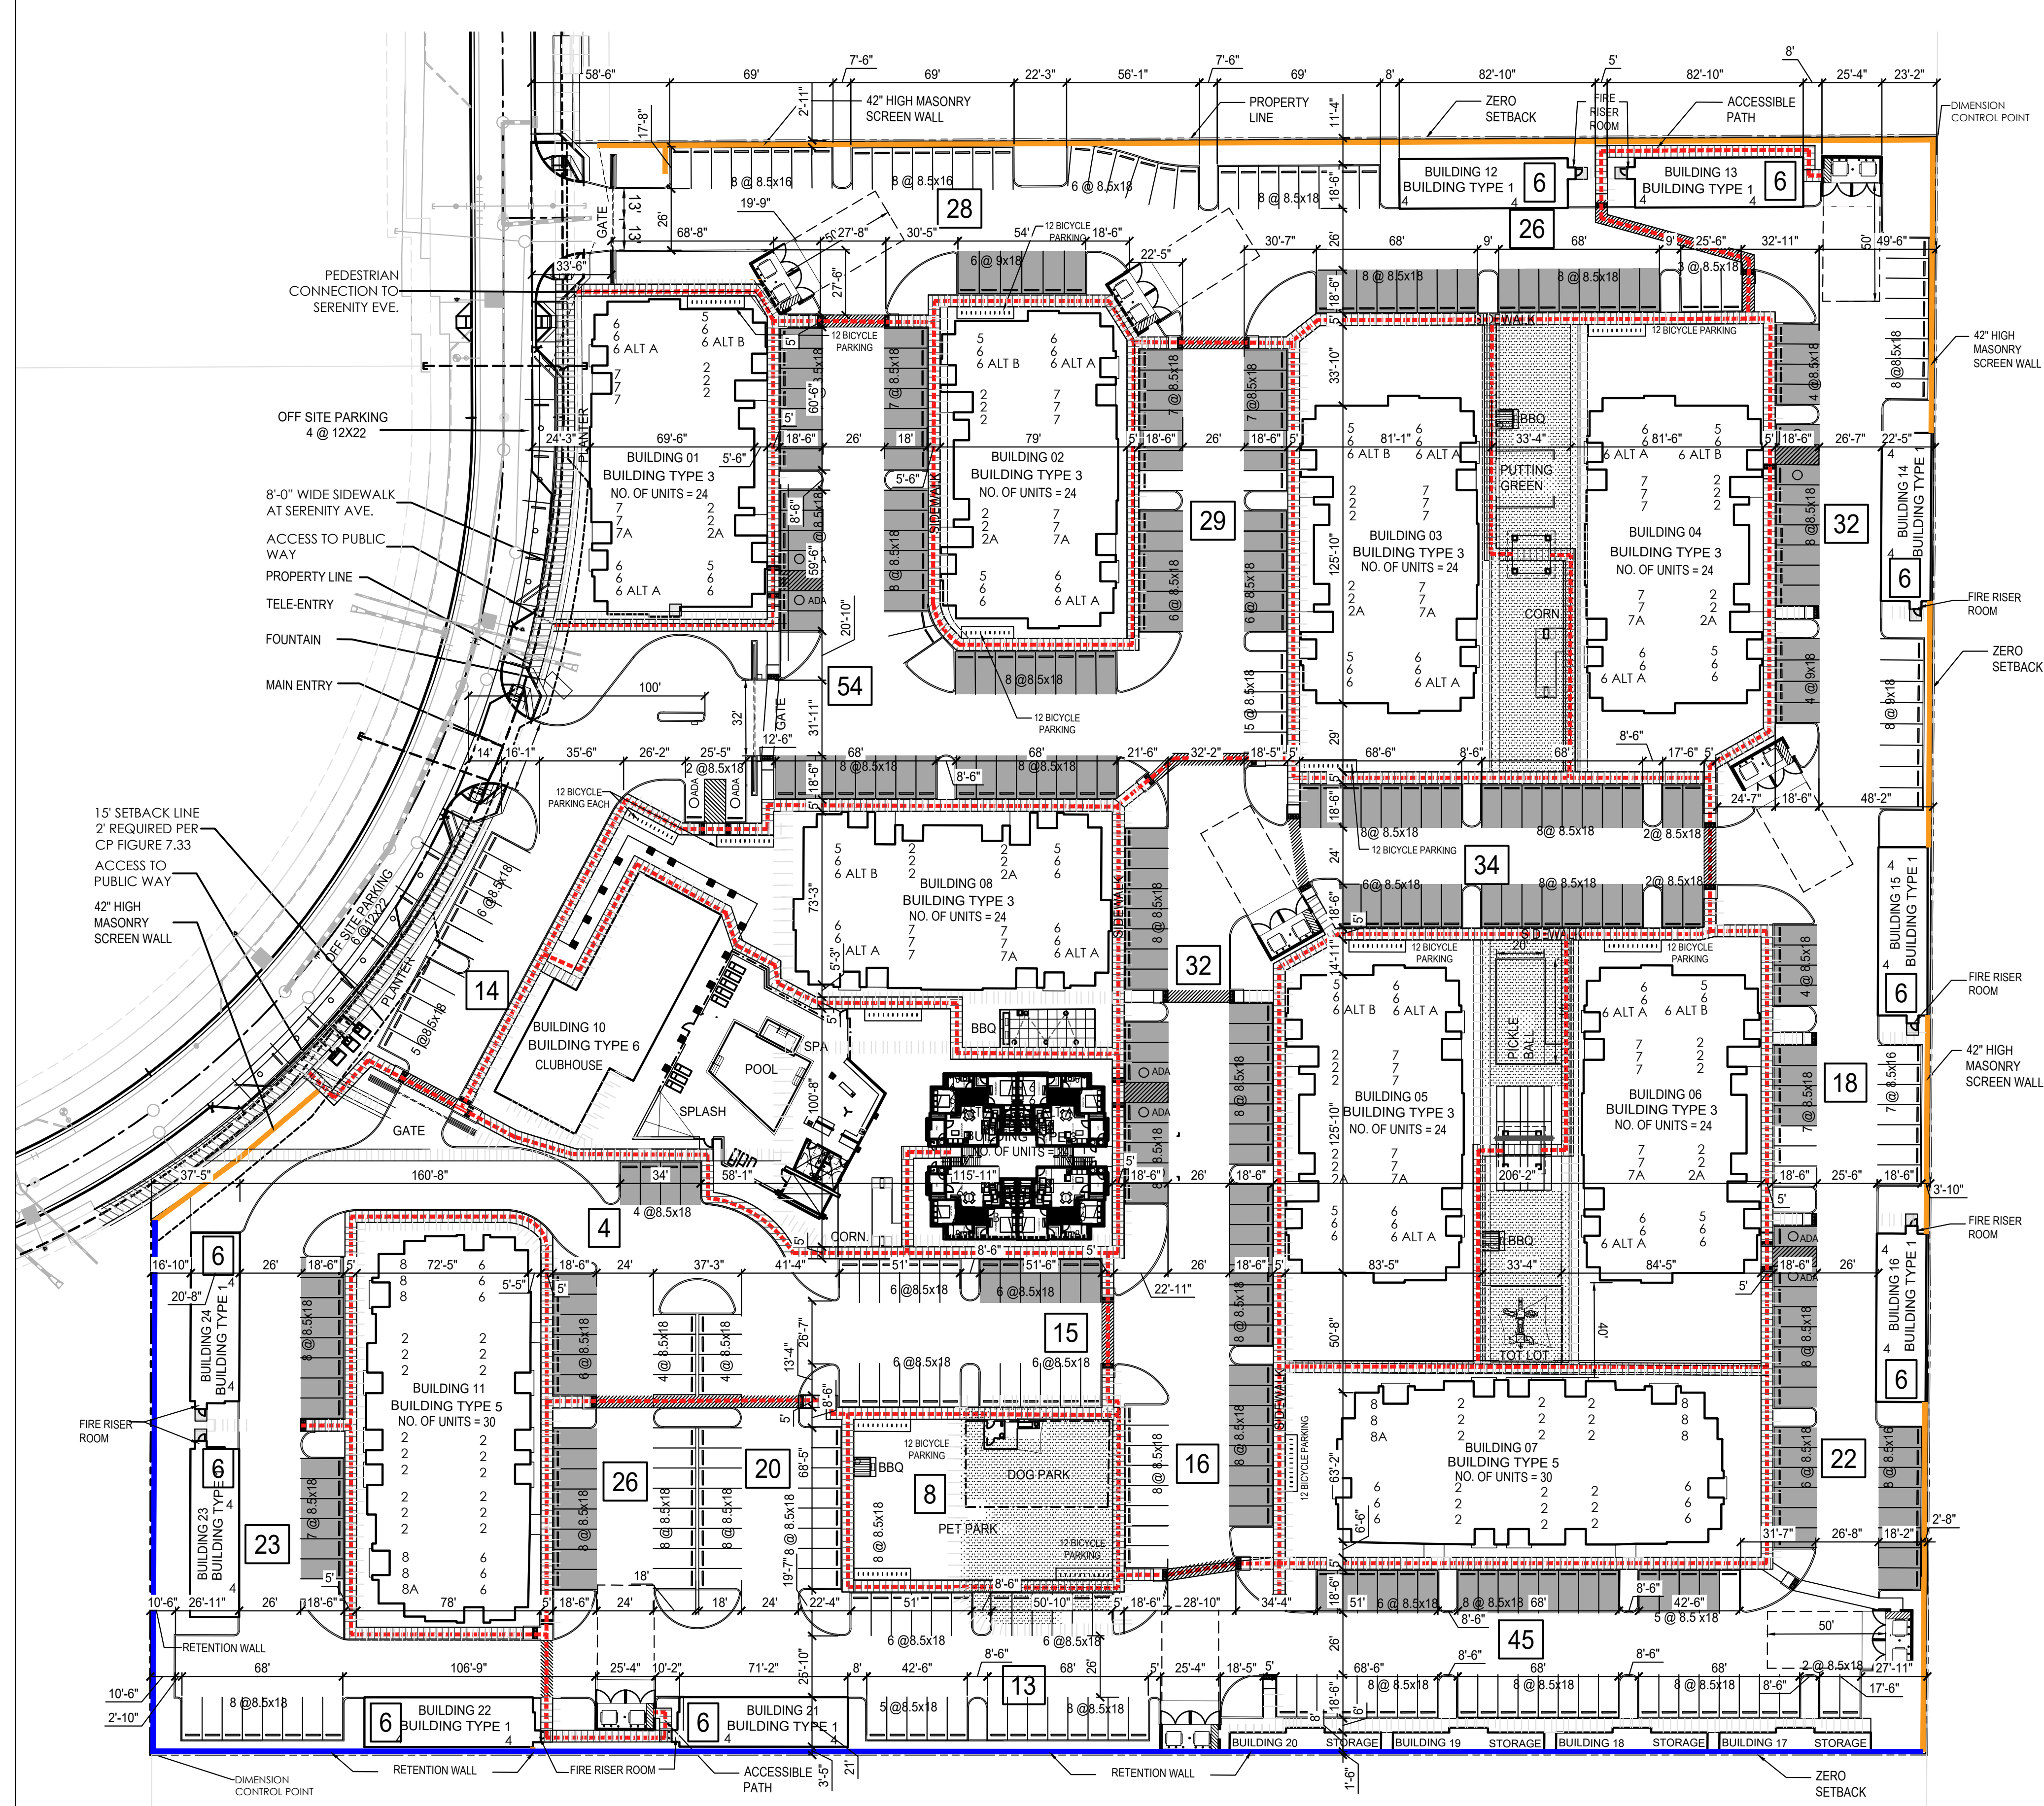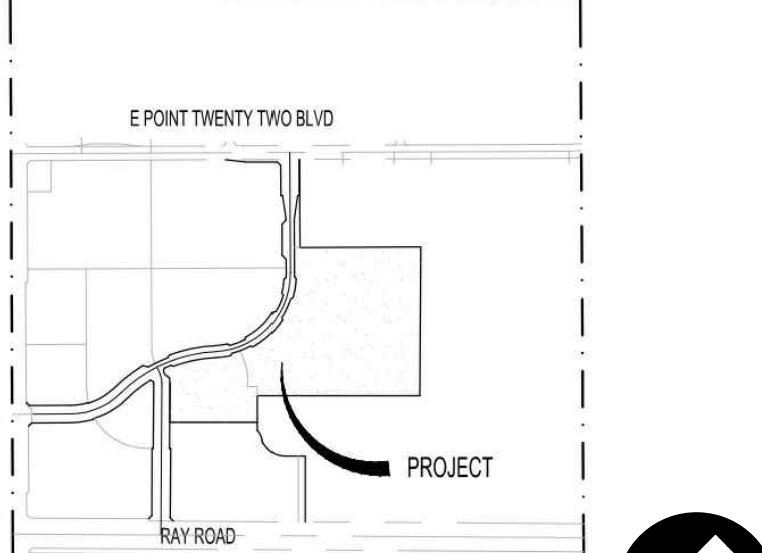

ARCHITECTURAL SITE PLAN

VICINITY MAP



BRAN BURTON
2 SANDS CREEK
PHOENIX, ARIZONA



PROJECT NAME & ADDRESS:
 EASTMARK 2.0
 5029 S. ELLSWORTH ROAD
 MESA, ARIZONA

PROJECT DESCRIPTION:
 FOR RENT APARTMENTS WITH A CLUBHOUSE INCLUDING: LEASING CENTER, COMMUNITY CENTER & EXERCISE FACILITY.
 APARTMENT TYPES INCLUDE:
 ONE BEDROOM, TWO BEDROOM AND THREE BEDROOM UNITS.
 CARRIAGE BUILDINGS WITH ONE BEDROOM UNITS ABOVE ATTACHED GARAGES AT 1ST FLOOR.
 AMENITIES INCLUDE:
 ENCLOSED GARAGES, POOL & SPA, COURTYARD AND POOLSIDE KITCHEN/BAR AT CABANA BUILDING AND PEDESTRIAN PATHWAYS AT COURTYARDS, SEE AMENITIES/SERVICES NOTES FOR DETAILED BREAKDOWN OF AMENITIES.

GENERAL BUILDING CODE ANALYSIS:
 PROPOSED USE: MULTI-FAMILY RESIDENTIAL
 OCCUPANCIES: R-2 @ RESIDENTIAL UNITS
 U @ GARAGES
 A-3 @ CLUBHOUSE (B @ MGR. OFFICE)
 B @ MAIL BUILDING
 B @ CABANA
 B @ RAMADA
 B @ CARPORTS
 CONSTRUCTION TYPE: VA W/ NFPA 13R @ RES. UNITS
 VB W/ NFPA 13 @ CLUBHOUSE
 VB @ MAILROOM
 VB @ CABANA
 IB @ CARPORTS

EFFECTIVE GOVERNING CODES:
 ADMIN. 2018 MESA BLDG SAFETY ADMINISTRATIVE CODE
 IBC 2018 INTERNATIONAL BUILDING CODE
 IRC 2018 INTERNATIONAL RESIDENTIAL CODE
 IFC 2018 INTERNATIONAL FIRE CODE
 IMC 2018 INTERNATIONAL MECHANICAL CODE
 IPC 2018 INTERNATIONAL PLUMBING CODE
 NEC 2017 NATIONAL ELECTRICAL CODE
 IFCC 2018 INTERNATIONAL FUEL GAS CODE
 IECC 2018 INTERNATIONAL ENERGY CONSERVATION CODE
 IEBC 2018 INTERNATIONAL EXISTING BUILDING CODE
 ISPCS 2018 INTERNATIONAL SWIMMING POOL & SPA CODE
 AND CITY OF AMENDMENTS...
 -MESA ZONING AND DEVELOPMENT CODE

GENERAL ZONING ANALYSIS:
 SITE ZONING: PC
 SITE AREA:
 GROSS: ±10.49 AC (#457,318.00 SF)
 NET: ±10.49 AC (#457,318.00 SF)
 TOTAL BUILDING FOOTPRINT AREA: ±02.43 AC (#105,946.00 SF) (25%)
 FLOOR AREA RATIO: 0.23
 MAXIMUM BUILDING HEIGHT: 37'-2"
 OPEN SPACE / AMENITY AREA: ±02.57 AC (#112,216.00 SF) (25%)
 OPEN AREA RATIO: 0.24
 NOTE: Site Area Data to be verified by Civil Engineer

EASTMARK DEVELOPMENT:
 DEVELOPMENT UNIT PLANS 374 : DEVELOPMENT UNIT PLAN
 LAND USE GROUP (LUG) UC - URBAN CORE

RESIDENTIAL BUILDING UNIT MIX:

UNIT TYPE	LIVABLE SQ. FT.	GROSS SQ. FT.	BEDS	BATHS
TYPE 1/1A	459	499	1	1
TYPE 2/2A	678	771	1	1
TYPE 3	592	678	1	1
TYPE 4	630	689	1	1
TYPE 5	745	845	1	1
TYPE 6	951	1,037	2	2
TYPE 7/7A	1,043	1,129	2	2
TYPE 8/8A	1,251	1,347	3	2

* LIVABLE SQ. FOOTAGE IS CALCULATED FROM CENTERLINE OF UNIT SEPARATION WALL, TO INSIDE FACE OF EXTERIOR WALLS

PROJECT UNIT MIX:
 1 BEDROOM / 1 BATH: 90 D.U. (35%)
 2 BEDROOM / 2 BATH: 156 D.U. (60%)
 3 BEDROOM / 2 BATH: 12 D.U. (5%)
 TOTAL: 258 D.U. (100%)

258 UNITS / 10.49 ACRES = 24.59 UNITS PER ACRE

PARKING STANDARDS:
 PARKING STALL: 9'-0" x 18'-0" (W/ 2" OVERHANG)
 COMPACT PARKING STALL: 8'-6" x 18'-0"
 PARKING AISLE (FIRELANE PER MESA FIRE): 26'-0"

REQUIRED PARKING:
 1 BEDROOM: (90) x 0.5 = 45 P.S.
 2 BEDROOM: (156) x 0.5 = 78 P.S.
 3 BEDROOM: (12) x 0.75 = 09 P.S.
 GUEST: (258) x 0.2 = 52 P.S.
 TOTAL: 184 P.S.




PROVIDED PARKING:
 PARKING SPACES: 204 P.S.
 ACCESSIBLE PARKING SPACES: 02 P.S.
 GARAGE: 53 P.S.
 GARAGE ACCESSIBLE PARKING: 01 P.S.
 COVERED PARKING PER DWELLING: 258 P.S.
 COVERED ACCESSIBLE PARKING: 08 P.S.
 OFF SITE PARKING: 10 P.S.
 TOTAL: 536 P.S.

PARKING RATIO PROVIDED:
 526 PARKING / 258 UNITS = 2.03 PARKING / UNIT

REQUIRED BICYCLE PARKING:
 1 BEDROOM: (90) x 0.5 = 45 P.S.
 2 BEDROOM: (156) x 0.5 = 78 P.S.
 3 BEDROOM: (12) x 0.75 = 09 P.S.
 GUEST: (258) x 0.2 = 52 P.S.
 TOTAL: 184 P.S.



PROVIDED BICYCLE PARKING:
 TOTAL: 192 P.S.

GENERAL NOTES:
 a. "Comply with all provisions and requirements of Mesa Building Code (MBC) Chapter 33 - Safeguards During Construction, Mesa Fire Code (MFC) Chapter 33 - Fire Safety During Construction and Demolition, and NFPA 241 for items not specifically addressed by MFC Chapter 33." Fire apparatus access roads are essential during construction to allow emergency response to the site for both fire and medical emergencies. Access roads shall be in place prior to the start of vertical construction. It is important to develop access roads at an early stage of construction to allow for fire department access to the site in the case of fire or injury.
 b. "Required fire apparatus access road during construction or demolition shall comply with Mesa Fire and Medical Department standard detail FPD 3310.1. The access road shall be a minimum of 20 feet wide of oil-water diverting surface, graded to drain standing water and engineered to bear the imposed loads of fire apparatus (78,000 lbs. / 24,000 lbs. front axle, 54,000 lbs. rear axle) when roads are wet.
 The access road shall be extended to within 200 feet of any combustible materials and/or any location on the jobsite where any person(s) shall be working for a minimum of four (4) continuous hour in any day. A clearly visible sign marked "Fire Department Access" in red letters, shall be provided at the entry to the access road.
 All open trenches shall have steel plates capable of maintaining the integrity of the access road design when these trenches cross an access road. These access roads may be temporary or permanent. This policy applies only during construction and/or demolition. Permanent access per the Mesa Fire Code shall be in place prior to any final inspection or certificate of occupancy."
 c. Water supply for fire protection. An approved water supply for construction site shall meet the requirements of Appendix Chapters B and C. The minimum fire flow requirement when contractor or developer brings combustible materials on site is 1,500 gpm at 25 psi. At least one fire hydrant shall be within 500 feet of any combustible material and capable of delivering the minimum fire flow requirement. This hydrant or hydrants may be either temporary or permanent as the project schedule permits.
 In addition, there are times when hydrants and valves must be closed temporarily for repair work or construction of the water systems. The developer/contractor is responsible for ensuring that the water supply is available. When the work is complete, developer/contractor shall make sure that the fire hydrants are active and the valves are open.

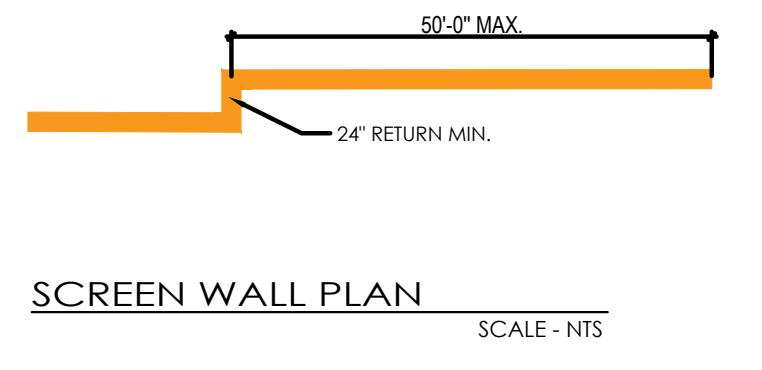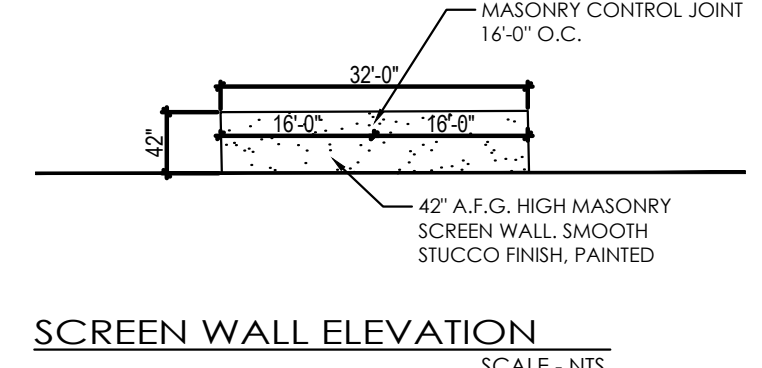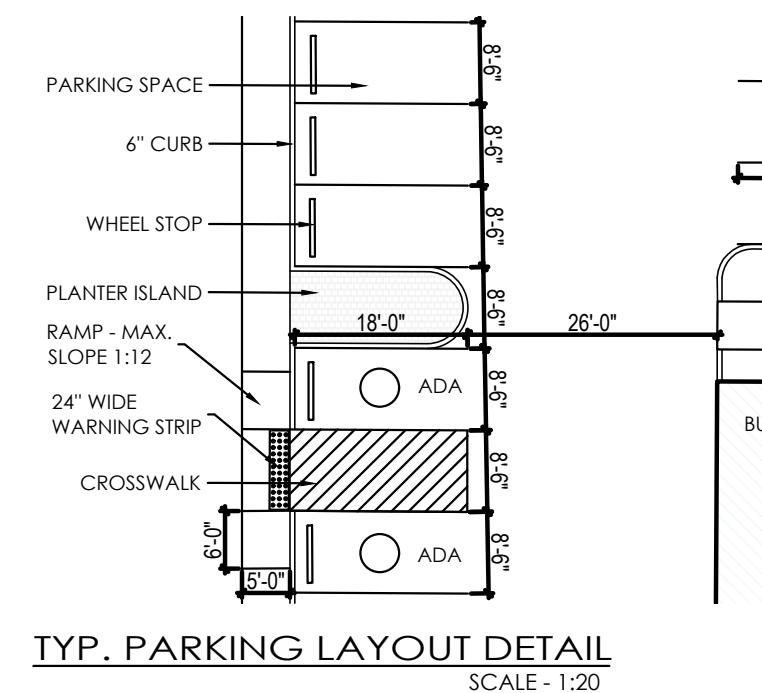


LEGEND

- 42" A.F.G. HIGH MASONRY SCREEN WALL.
- 5'-0" WIDE MIN. ACCESS - ROUTE
- COVERED PARKING
- 6'-0" FULL HEIGHT (AND OR) RETAINING WALL

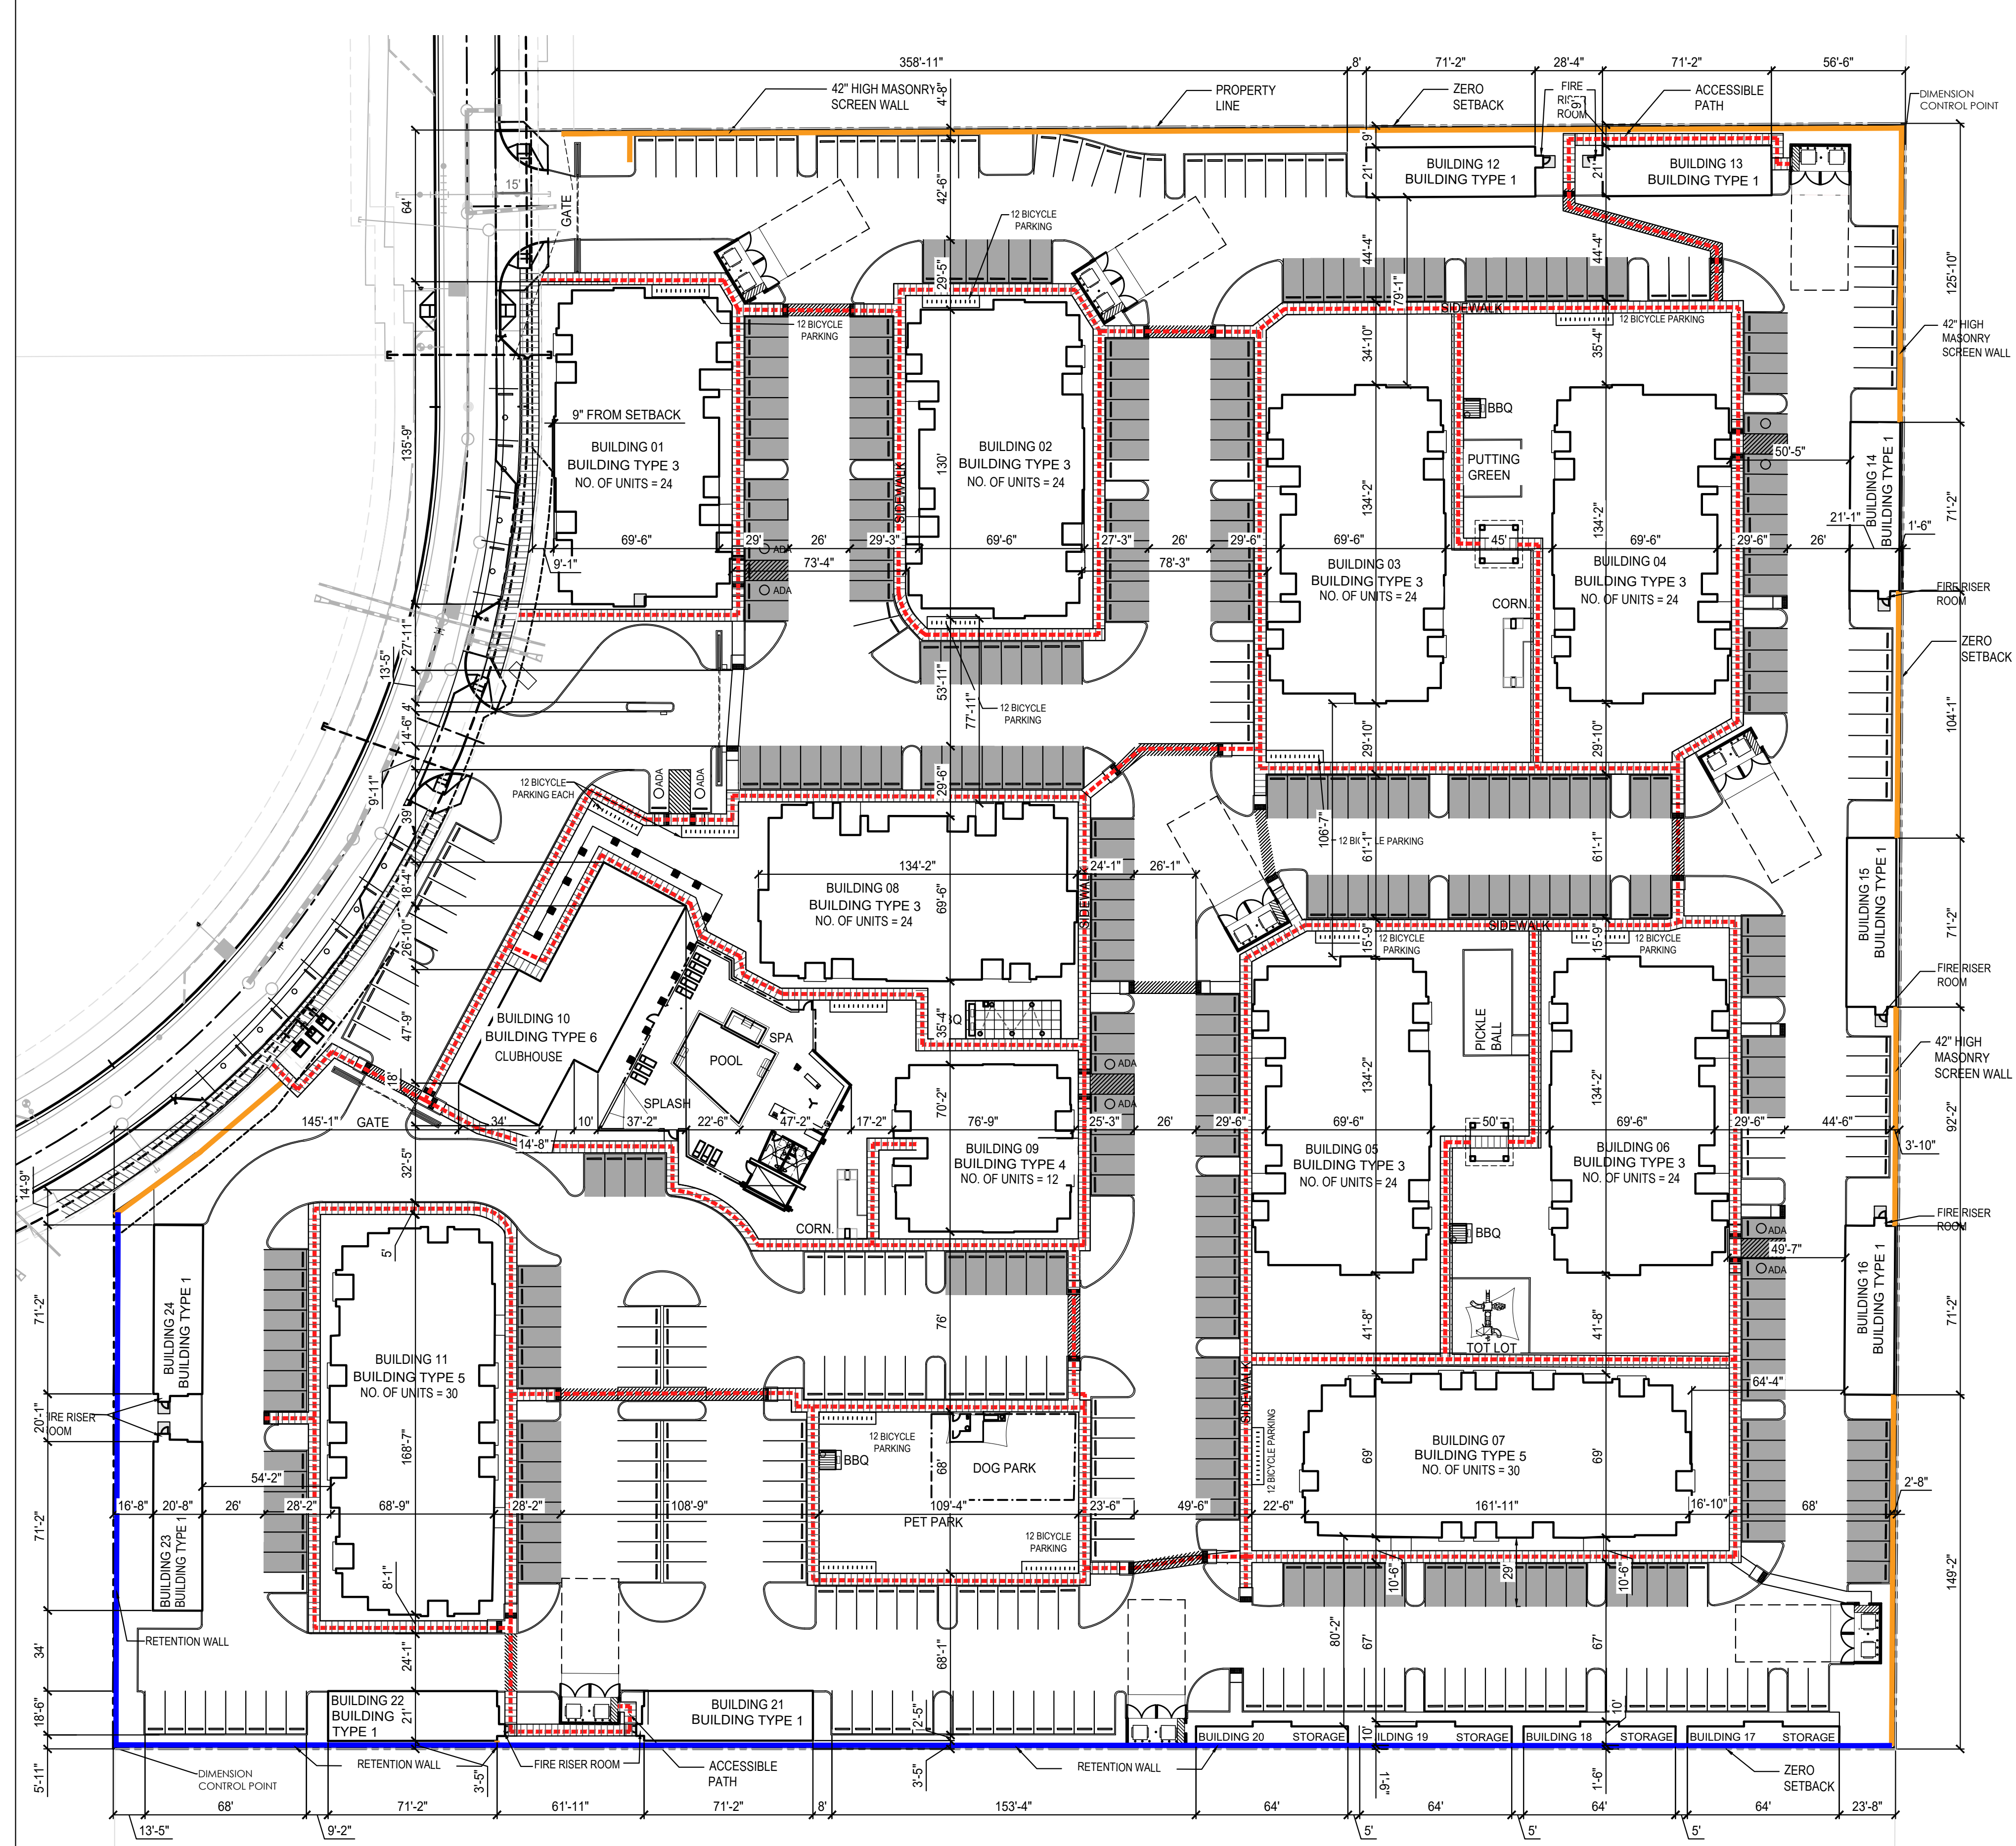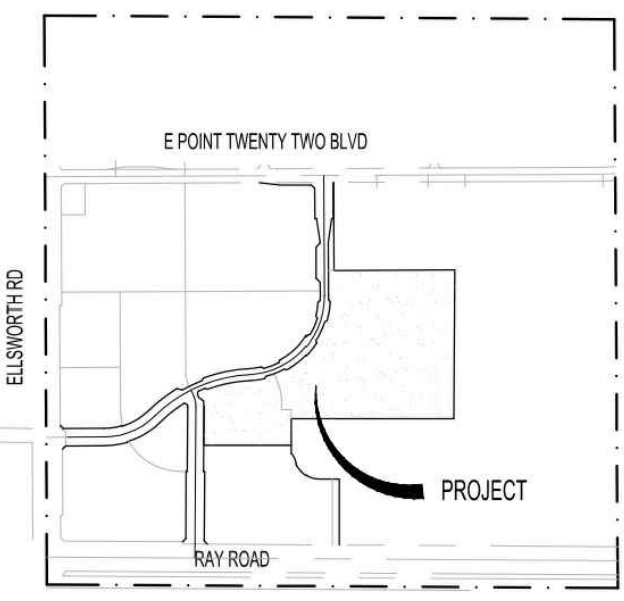

ARCHITECTURAL DIM. CONTROL SITE PLAN

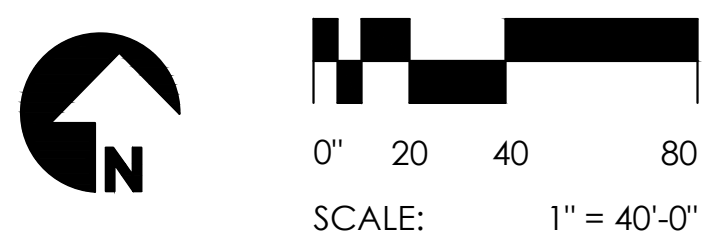

NO	DATE	P&Z SUBMISSION
	08/24/2021	P&Z SUBMISSION 3

EASTMARK 2.0
 MESA, AZ

ARCHITECTURE LLC
 345 N. BEVERLY MESA, AZ 85201
 TEL: (602) 750-0445 WWW.ARCHITECTUREDB.COM

THE OWNER, ARCHITECT, AND ENGINEER EXPRESSLY DISCLAIM ANY RESPONSIBILITY ARISING FROM ANY UNAUTHORIZED USE OF THESE PLANS, DRAWINGS, AND NOTES. ANY AUTHORIZATION MUST BE IN WRITING.

THIS DRAWING COPY MAY HAVE BEEN REPRODUCED AT A SIZE DIFFERENT THAN ORIGINALLY DRAWN. THE OWNER, ARCHITECT, AND ENGINEER ASSUME NO RESPONSIBILITY FOR THE USE OF INCORRECT SCALE.

AHU/STAMP

CITY PROJECT NUMBER:	
DRAWING TITLE:	Architectural Dim. Control Site Plan
PROJECT NO:	
DRAWING NUMBER:	A1.2