

SITE PLAN - PHOTOMETRIC



Project		Catalog #		Type	
Prepared by		Notes		Date	



Lumark

Prevail / Prevail XL Discrete LED

Area / Site Luminaire

Product Features



Product Certifications



Interactive Menu


- Ordering Information [page 2](#)
- Mounting Details [page 3](#)
- Optical Configurations [page 3](#)
- Product Specifications [page 4](#)
- Energy and Performance Data [page 4](#)
- Control Options [page 5](#)

Quick Facts


- Direct-mounted discrete light engine for improved optical uniformity and visual comfort
- Lumen packages range from 7,500 - 41,000 nominal lumens (50W - 300W)
- Replaces 70W up to 1,000W HID equivalents
- Efficacies up to 148 lumens per watt
- Standard universal quick mount arm with universal drill pattern

Dimensional Details

Prevail

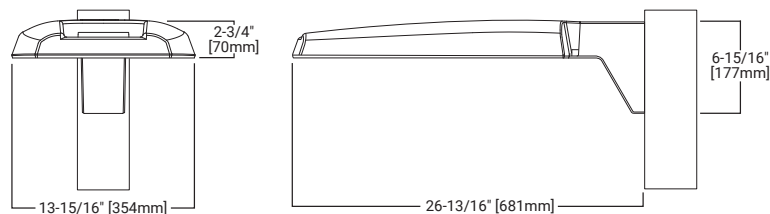

Prevail XL

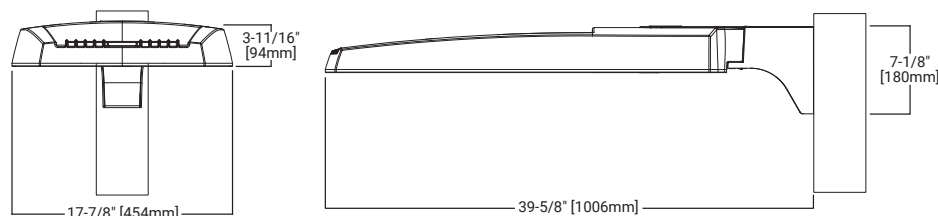

Connected Systems

- WaveLinx
- Enlighted

Ordering Information

SAMPLE NUMBER: **PRV-XL-PA4B-740-U-T4W-BZ**


Product Family ^{1,2}	Light Engine		Color Temperature	Voltage	Distribution	Mounting (Included)	Finish
PRV=Prevail	Configuration PA1=1 Panel, 24 LED Rectangle PA2=2 Panels, 48 LED Rectangles	Drive Current³ A=745mA Nominal B=950mA Nominal	740=70CRI, 4000K 730=70CRI, 3000K 735=70CRI, 3500K 750=70CRI, 5000K	U=Universal, 120-277V H=High Voltage, 347-480V 9=347V 8=480V ⁴	T2R=Type II Roadway T2U=Type II Urban T3=Type III T4W=Type IV Wide 5WQ=Type V Square Wide	[Blank]=Standard Versatile Arm MA=Mast Arm WM=Wall Mount Arm	AP=Grey BK=Black BZ=Bronze DP=Dark Platinum GM=Graphite Metallic WH=White
PRV-XL=Prevail XL	PA3=3 Panels, 72 LED Rectangles PA4=4 Panels, 96 LED Rectangles						
Options (Add as Suffix)				Accessories (Order Separately) ¹⁷			
10K=10kV UL 1449 Fused Surge Protective Device 20MSP=20kV MOV Surge Protective Device 20K=Series 20kV UL 1449 Surge Protective Device HA=50°C High Ambient Temperature HSS=House Side Shield (Factory Installed) ⁵ L90=Optics Rotated 90° Left R90=Optics Rotated 90° Right PR=NEMA 3-PIN Twistlock Photocontrol Receptacle ⁶ PR7=NEMA 7-PIN Twistlock Photocontrol Receptacle ⁶ SPB1=Dimming Occupancy Sensor with Bluetooth Interface, <8' Mounting ²³ SPB2=Dimming Occupancy Sensor with Bluetooth Interface, 8'-20' Mounting ²³ SPB4=Dimming Occupancy Sensor with Bluetooth Interface, 21'-40' Mounting ²³ MS/DIM-L08=Motion Sensor for Dimming Operation, Up to 8' Mounting Height ^{7,8,9} MS/DIM-L20=Motion Sensor for Dimming Operation, 9' - 20' Mounting Height ^{7,8,9} MS/DIM-L40=Motion Sensor for Dimming Operation, 21' - 40' Mounting Height ^{7,8,9} MS-L08=Motion Sensor for ON/OFF Operation, Up to 8' Mounting Height ^{7,8,9} MS-L20=Motion Sensor for ON/OFF Operation, 9' - 20' Mounting Height ^{7,8,9} MS-L40=Motion Sensor for ON/OFF Operation, 21' - 40' Mounting Height ^{7,8,9} ZD=DALI-enabled 4-PIN Twistlock Receptacle ^{7,8,10,11} ZW=Wavelinx-enabled 4-PIN Twistlock Receptacle ^{7,8,10,11} SWPD4XX=Wavelinx Wireless Sensor, 7' - 15' Mounting Height ^{7,8,10,11,12,13} SWPD5XX=Wavelinx Wireless Sensor, 15' - 40' Mounting Height ^{7,8,10,11,12,13} LWR-LW=Enlighted Wireless Sensor, Wide Lens for 8' - 16' Mounting Height ^{7,8,14} LWR-LN=Enlighted Wireless Sensor, Narrow Lens for 16' - 40' Mounting Height ^{7,8,14} (See Table Below)=LumenSafe Integrated Network Security Camera ^{15,16} CC=Coastal Construction ²²				PRVWM-XX=Wall Mount Kit ¹⁸ PRVMA-XX=Mast Arm Mounting Kit ¹⁸ PRVSA-XX=Standard Arm Mounting Kit ¹⁸ PRVXLMW-XX=Wall Mount Kit (for Prevail XL) ¹⁵ PRVXLMA-XX=Mast Arm Mounting Kit (for Prevail XL) ¹⁵ PRVXLSA-XX=Standard Arm Mounting Kit (for Prevail XL) ¹⁵ MA1010-XX=Single Tenon Adapter for 3-1/2" O.D. Tenon MA1011-XX=2@180° Tenon Adapter for 3-1/2" O.D. Tenon MA1017-XX=Single Tenon Adapter for 2-3/8" O.D. Tenon MA1018-XX=2@180° Tenon Adapter for 2-3/8" O.D. Tenon HSS-VP=House Side Shield, Vertical Panel ^{5,19} HSS-HP=House Side Shield, Horizontal Panel ^{5,19} OA/RA1013=Photocontrol Shorting Cap OA/RA1014=NEMA Photocontrol - 120V OA/RA1016=NEMA Photocontrol - Multi-Tap 105-285V OA/RA1201=NEMA Photocontrol - 347V OA/RA1027=NEMA Photocontrol - 480V FSIR-100=Wireless Configuration Tool for Motion Sensor ²⁰ SWPD4-XX=WaveLinx Wireless Sensor, 7' - 15' Mounting Height ^{11,12,13} SWPD5-XX=WaveLinx Wireless Sensor, 15' - 40' Mounting Height ^{11,12,13} WOLC-7P-10A=WaveLinx Outdoor Control Module (7-PIN) ²¹			
NOTES: 1. DesignLights Consortium® Qualified. Refer to www.designlights.org Qualified Products List under Family Models for details. 2. Customer is responsible for engineering analysis to confirm pole and fixture compatibility for applications. Refer to installation instructions and pole white paper WP513001EN for additional support information. 3. Nominal drive currents shown here. For actual drive current by configuration, refer to Power and Lumen tables. 4. Only for use with 480V Wye systems. Per NEC, not for use with ungrounded systems, impedance grounded systems or corner grounded systems (commonly known as Three Phase Three Wire Delta, Three Phase High Leg Delta and Three Phase Corner Grounded Delta systems). 5. House Side Shield not for use with 5WQ distribution. 6. If High Voltage (H) is specified, use a photocontrol that matches the input voltage used (either 347V or 480V). 7. Option not available with High Voltage (H). Must specify Universal (U), 347V (9), or 480V (8) voltage. 8. Controls system is not available with photocontrol receptacle (PR or PR7) or other controls systems (MS, ZW, ZD or LWR). 9. Utilizes the Wattstopper sensor FSP-211. 10. Sensor passive infrared (PIR) may be overly sensitive when operating below -20°C (-4°F). 11. For the device to be field-configurable, requires WAC Gateway components WAC-PoE and WPOE-120 in appropriate quantities. Only compatible with WaveLinx system and software and requires system components to be installed for operation. See website for more Wavelinx application information. 12. Replace XX with sensor color (WH, BZ or BK). 13. Requires 4-PIN twistlock receptacle (ZD or ZW) option. 14. Enlighted wireless sensors are factory installed and require network components LWP-EM-1, LWP-GW-1, and LWP-PoE8 in appropriate quantities. See website for application information. 15. Only available in PRV-XL configurations PA3X or PA4X. 16. Not available with High Voltage (H, 8 or 9) or HA options. Consult LumenSafe system product pages for additional details and compatibility information. 17. Replace XX with paint color. 18. Only available in PRV configurations PA1X or PA2X. 19. Must order one per optic/LED when ordering as a field-installable accessory (1, 2, 3 or 4). Refer to House Side Shield reference table for details. 20. This tool enables adjustment to Motion Sensor (MS) parameters including high and low modes, sensitivity, time delay, cutoff and more. Consult your lighting representative for more information. 21. Requires 7-PIN NEMA twistlock photocontrol receptacle (PR7) option. The WOLC-7 cannot be used in conjunction with other controls systems (MS, ZW, ZD or LWR). Only for use at 120-347V. 22. Coastal construction finish salt spray tested to over 5,000-hours per ASTM B117, with a scribe rating of 9 per ASTM D1654. 23. Smart device with mobile application required to change system defaults. See controls section for details.							

LumenSafe Integrated Network Security Camera Technology Options (Add as Suffix)


Product Family	Camera Type	Data Backhaul	
L =LumenSafe Technology 	D =Dome Camera	C =Cellular, Customer Installed SIM Card A =Cellular, Factory Installed AT&T SIM Card V =Cellular, Factory Installed Verizon SIM Card S =Cellular, Factory Installed Sprint SIM Card	E =Ethernet Networking

Mounting Details


Pole Mount Arm (PRV)

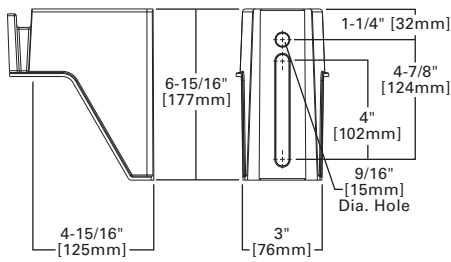


Pole Mount Arm (PRV-XL)

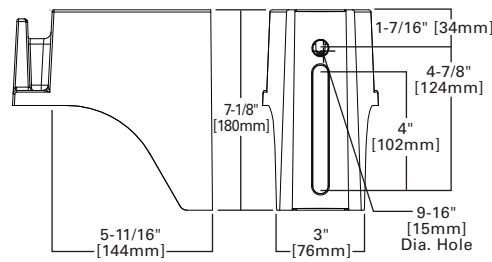


Versatile Mount System

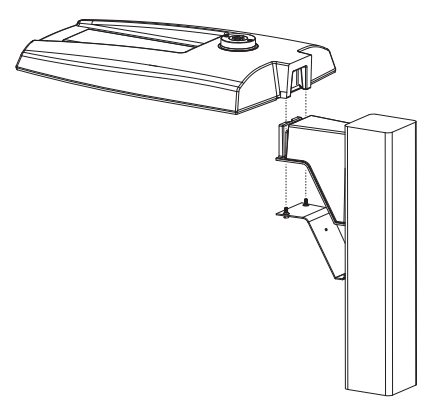


Wall Mount (PRV)

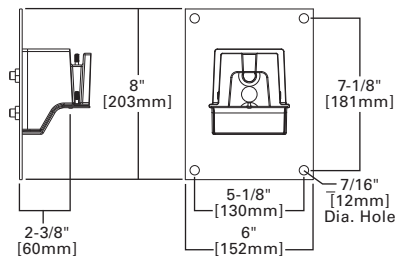


Wall Mount (PRV-XL)

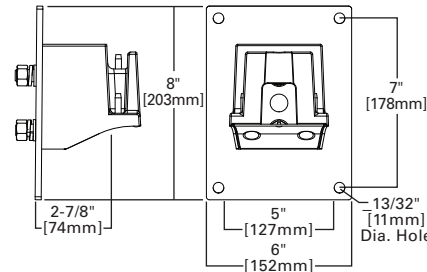

Mast Arm Mount (PRV)

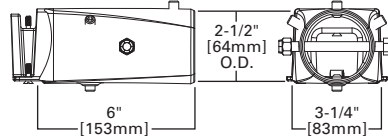


Mast Arm Mount (PRV-XL)

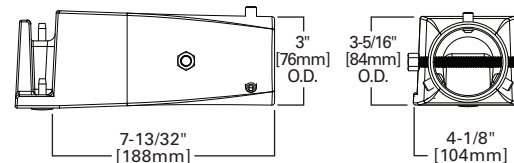

Mounting Configurations and EPAs


NOTE: For 2 PRV's mounted at 90°, requires minimum 3" square or 4" round pole for fixture clearance. For 2 PRV-XL's mounted at 90°, requires minimum 4" square or round pole for fixture clearance. Customer is responsible for engineering analysis to confirm pole and fixture compatibility for applications.

Wall Mount	Arm Mount Single	Arm Mount 2 @ 180°	Arm Mount 2 @ 90°	Arm Mount 3 @ 90°	Arm Mount 4 @ 90°
	EPA 0.92 (PRV)	EPA 1.35 (PRV)	EPA 1.42 (PRV)	EPA 1.63 (PRV)	EPA 1.63 (PRV)
	EPA 1.12 (PRV-XL)	EPA 2.25 (PRV-XL)	EPA 2.13 (PRV-XL)	EPA 2.52 (PRV-XL)	EPA 2.52 (PRV-XL)

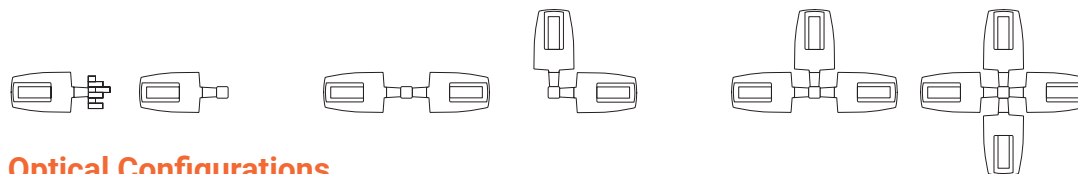


Optical Configurations


PRV-PA1X




PRV-PA2X




PRV-XL-PA3X



PRV-XL-PA4X



Optical Distributions

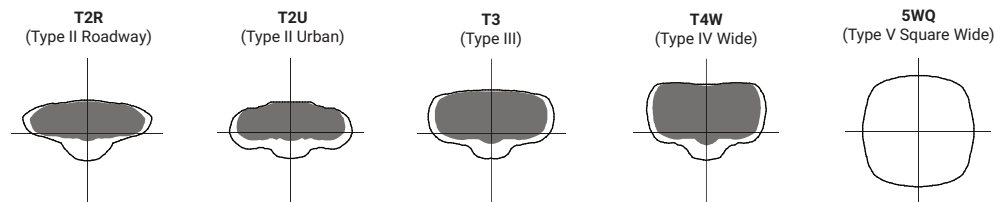

■ = Distribution with House Side Shield (HSS)

□ = Optical Distribution

Product Specifications

Construction

- Single-piece die-cast aluminum housing
- Tethered die-cast aluminum door

Optics

- Dark Sky Approved (3000K CCT and warmer only)
- Precision molded polycarbonate optics

Electrical

- -40°C minimum operating temperature
- 40°C maximum operating temperature
- >.9 power factor
- <20% total harmonic distortion

- Class 1 electronic drivers have expected life of 100,000 hours with <1% failure rate
- 0-10V dimming driver is standard with leads external to the fixture

Mounting

- Versatile, patented, standard mount arm accommodates multiple drill patterns ranging from 1-1/2" to 4-7/8" (Type M drilling recommended for new installations)
- A knock-out on the standard mounting arm enables round pole mounting
- Prevail: 3G vibration rated (all arms)
- Prevail XL Mast Arm: 3G vibration rated

- Prevail XL Standard Arm: 1.5G vibration rated

Finish

- Five-stage super TGIC polyester powder coat paint, 2.5 mil nominal thickness

Shipping Data

- Prevail: 20 lbs. (9.09 kgs.)
- Prevail XL: 45 lbs. (20.41 kgs.)

Warranty

- Five year limited warranty, consult website for details. www.cooperlighting.com/legal

Energy and Performance Data

Power and Lumens (PRV)

Light Engine		PA1A	PA1B	PA2A	PA2B
Power (Watts)		54	74	113	151
Drive Current (mA)		670	930	720	970
Input Current @ 120V (A)		0.45	0.62	0.93	1.26
Input Current @ 277V (A)		0.21	0.28	0.41	0.55
Input Current @ 347V (A)		0.17	0.23	0.33	0.45
Input Current @ 480V (A)		0.12	0.17	0.24	0.33
Distribution					
Type II Roadway	4000K/5000K Lumens	7,605	9,896	15,811	19,745
	BUG Rating	B1-U0-G2	B1-U0-G2	B2-U0-G3	B2-U0-G3
	Lumens per Watt	141	134	141	131
	3000K Lumens ¹	6,926	9,012	14,399	17,982
Type II Urban	4000K/5000K Lumens	7,597	9,886	15,795	19,724
	BUG Rating	B2-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3
	Lumens per Watt	141	134	141	131
	3000K Lumens ¹	6,919	9,003	14,384	17,963
Type III	4000K/5000K Lumens	7,575	9,857	15,749	19,667
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G3	B3-U0-G3
	Lumens per Watt	140	133	141	130
	3000K Lumens ¹	6,899	8,977	14,343	17,911
Type IV Wide	4000K/5000K Lumens	7,484	9,738	15,560	19,431
	BUG Rating	B2-U0-G2	B2-U0-G3	B3-U0-G3	B3-U0-G4
	Lumens per Watt	139	132	139	129
	3000K Lumens ¹	6,816	8,869	14,170	17,696
Type V Square Wide	4000K/5000K Lumens	7,831	10,190	16,281	20,332
	BUG Rating	B3-U0-G2	B4-U0-G3	B4-U0-G3	B5-U0-G3
	Lumens per Watt	145	138	145	135
	3000K Lumens ¹	7,132	9,280	14,827	18,517

NOTES:

1. For 3000K BUG Ratings, refer to published IES files.

Power and Lumens (PRV-XL)

Light Engine		PA3A	PA3B	PA4A	PA4B
Power (Watts)		172	234	245	303
Drive Current (mA)		750	980	785	970
Input Current @ 120V (A)		1.44	1.95	2.04	2.53
Input Current @ 277V (A)		0.62	0.85	0.93	1.12
Input Current @ 347V (A)		0.52	0.70	0.74	0.90
Input Current @ 480V (A)		0.39	0.52	0.53	0.65
Distribution					
Type II Roadway	4000K/5000K Lumens	24,718	30,648	34,067	39,689
	BUG Rating	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4
	Lumens per Watt	144	131	139	131
	3000K Lumens ¹	22,511	27,912	31,025	36,145
Type II Urban	4000K/5000K Lumens	24,692	30,616	34,031	39,647
	BUG Rating	B4-U0-G4	B4-U0-G4	B4-U0-G4	B4-U0-G4
	Lumens per Watt	144	131	139	131
	3000K Lumens ¹	22,488	27,882	30,992	36,107
Type III	4000K/5000K Lumens	24,621	30,527	33,932	39,532
	BUG Rating	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5
	Lumens per Watt	143	130	138	130
	3000K Lumens ¹	22,423	27,802	30,903	36,002
Type IV Wide	4000K/5000K Lumens	24,325	30,161	33,525	39,057
	BUG Rating	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5
	Lumens per Watt	141	129	137	129
	3000K Lumens ¹	22,153	27,468	30,531	35,570
Type V Square Wide	4000K/5000K Lumens	25,453	31,559	35,079	40,868
	BUG Rating	B5-U0-G4	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	148	135	143	135
	3000K Lumens ¹	23,180	28,741	31,947	37,219

NOTES:

1. For 3000K BUG Ratings, refer to published IES files.



View PRV Discrete IES files



View PRV-XL Discrete IES files

Lumen Maintenance

Ambient Temperature	TM-21 Lumen Maintenance (78,000 Hours)
Up to 50°C	96.76%

House Side Shield Reference Table




		Light Engine Configuration			
		PA1	PA2	PA3	PA4
Rotated Optics	Standard	HSS-VP (qty 1)	HSS-HP (qty 2)	HSS-HP (qty 3)	HSS-VP (qty 4)
	L90 or R90 option	HSS-HP (qty 1)	HSS-VP (qty 2)	HSS-VP (qty 3)	HSS-HP (qty 4)

Control Options

0-10V This fixture provides 0-10V dimming wire leads for use with a lighting control panel or other control method.

Photocontrol (PR and PR7) Photocontrol receptacles provide a flexible solution to enable "dusk-to-dawn" lighting by sensing light levels. Advanced control systems compatible with NEMA 7-pin standards can be utilized with the PR7 receptacle.


Dimming Occupancy Sensor (SPB, MS/DIM-LXX and MS-LXX) These sensors are factory installed in the luminaire housing. When the SPB or MS/DIM sensor options are selected, the luminaire will dim down after five minutes of no activity detected. When activity is detected, the luminaire returns to full light output. When a sensor for ON/OFF operation (MS-LXX) is selected, the luminaire will turn off after five minutes of no activity. These occupancy sensors include an integral photocell that can be activated or inactivated with the programming remote / configuration tool for "dusk-to-dawn" control or "daylight harvesting." SPB motion sensors require the Sensor Configuration mobile application by Wattstopper to change factory default dimming level, time delay, sensitivity and other parameters. Available for iOS and Android devices. The SPB sensor is factory preset to dim down to approximately 10% power with a time delay of five minutes.

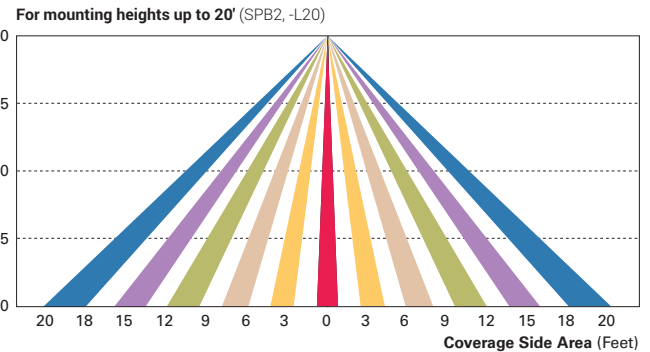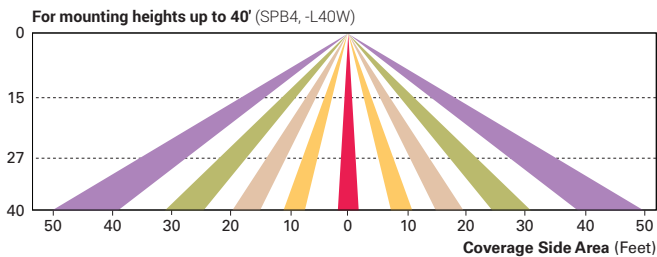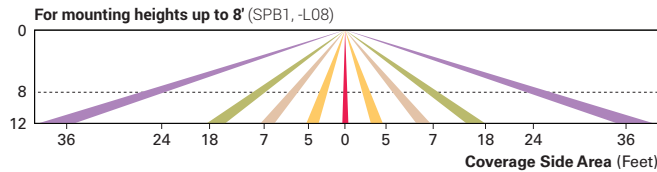



WaveLinx Wireless Control and Monitoring System Available in 7-PIN or 4-PIN configurations, the WaveLinx Outdoor control platform operates on a wireless mesh network based on IEEE 802.15.4 standards enabling wireless control of outdoor lighting. Use the WaveLinx Mobile application for set-up and configuration. At least one Wireless Area Controller (WAC) is required for full functionality and remote communication (including adjustment of any factory pre-sets).

WaveLinx Outdoor Control Module (WOLC-7P-10A) A photocontrol that enables astronomic or time-based schedules to provide ON, OFF and dimming control of fixtures utilizing a 7-PIN receptacle. The out-of-box functionality is ON at dusk and OFF at dawn.

WaveLinx Wireless Sensor (SWPD4 and SWPD5) These outdoor sensors offer passive infrared (PIR) occupancy and a photocell for closed loop daylight sensing. These sensors can be factory installed or field-installed via simple, tool-less integration into luminaires equipped with the Zhaga Book 18 compliant 4-PIN receptacle (ZD or ZW). These sensors are factory preset to dim down to approximately 50 percent power after 15 minutes of no activity detected. These occupancy sensors include an integral photocell for "dusk-to-dawn" control or daylight harvesting that is factory-enabled. A variety of sensor lenses are available to optimize the coverage pattern for mounting heights from 7'-40'.

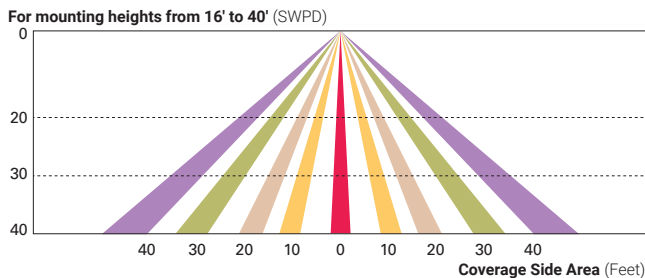

Enlighted Wireless Control and Monitoring System (LWR-LW and LWR-LN) The Enlighted System is a connected lighting solution that combines LED luminaires with an integrated wireless sensor system. The sensor controls the lighting system in compliance with the latest energy codes and collects valuable data about building performance and use. Software applications turn the granular data into information through energy dashboards and specialized apps that make it simple and help optimize the use of other resources beyond lighting.

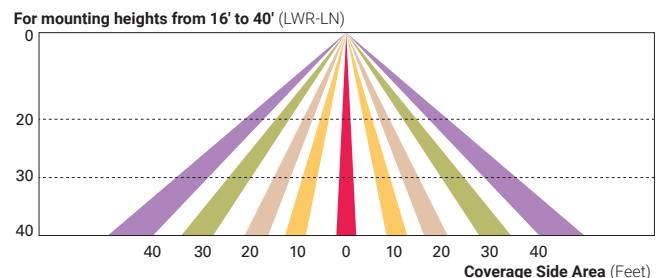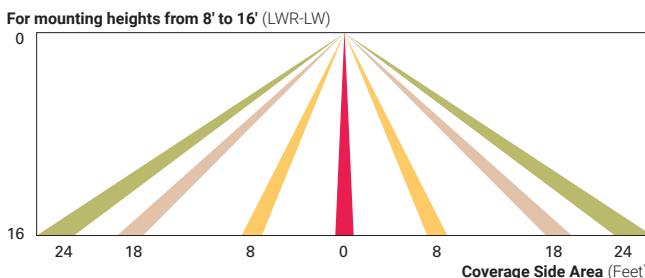

LumenSafe (LD) The LumenSafe integrated network camera is a streamlined, outdoor-ready camera that provides high definition video surveillance. This IP camera solution is optimally designed to integrate into virtually any video management system or security software platform of choice. No additional wiring is needed beyond providing line power to the luminaire. LumenSafe features factory-installed power and networking gear in a variety of networking options allowing security integrators to design the optimal solution for active surveillance.



AQUA 300 SQUARE LX

UP + DOWN SCONCE

PROJECT

Job _____

Type _____

Part # _____

Notes

SPECIFICATIONS

Source Two Xicato XTM LED modules - up to 3000 source lumens each

CCT 2700K, 3000K, 3500K or 4000K

Color Consistency 1x2 SDCM (MacAdam) along BBL, CCT +/- 40K to 70K, Duv +/- .001

CRI (Ra) 83 or 98

Driver / Location Integral / premium drivers must be remote mounted

Dimming 0-10V or phase to 10% standard; Ecosystem, DALI, DMX and 1% available

Input Voltage 100 to 277VAC (347VAC consult factory), phase dimmable versions are 120VAC only

Power Up to 70 watts max, depending on LED module / driver

Reflector 10°, 20°, 40°, 60° & optical accessories

Materials Tamper resistant design, stainless steel hardware, metal reflectors

Finish Powder coat - Exterior grade TGIC polyester, optional marine-grade finish

Weight 9.2 lb. [4.2 kg]

Location Listed for Wet location, tested to IP66 per IEC 60529


Approvals ETL Listed to UL 1598, 2108, 8750 and CSA C22.2# 9 & #250.0

L70 Life > 55,000 hours at 70% lumen maintenance, LM80 / TM-21, see pg 2

Warranty Lifetime Limited Warranty - see warranty for details

IES Files LM-79-08 IES files available

Modifications Any modification or customization is possible - consult factory

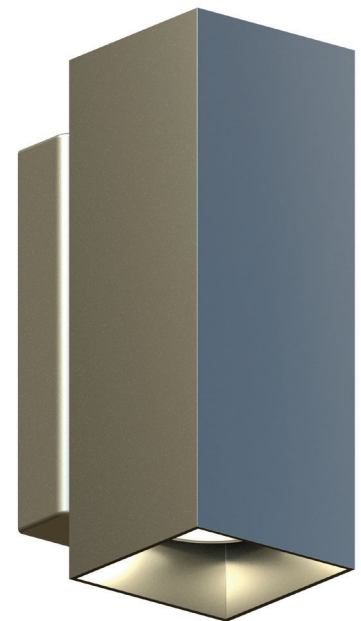

ORDERING LOGIC

Model -	Driver Location	# of Circuits	Dimming	Up				Optical Accessory -	Down				Optical Accessory -	Shell Color
				Output	CRI	CCT	Reflector		Output	CRI	CCT	Reflector		
K3SU														
K3SU	N=Integrated	1=1	N=None	07=700 lm	83=83	27=2700K	10=10°	NN=None	07=700 lm	83=83	27=2700K	10=10°	NN=None	XX=v2 color
	R=Remote	2=2	P=Phase, 10% V=0-10V, 10%	10=965 lm	98=98	30=3000K		DF*	10=965 lm	98=98	30=3000K		HL*	see pg 4
				13=1300 lm		35=3500K		LS*	13=1300 lm		35=3500K		DF*	ZZ=Custom
						40=4000K		WW*			40=4000K		LS*	
								FT*					WW*	add +MF for Marine Finish
	premium drivers (REMOTE location only):							*see pg 3					FT*	*see pg 3
	Z1=eldoLED 0-10V, 0%													
	Z2=eldoLED DALI, 0%			07=700 lm	83=83	27=2700K	20=20°		07=700 lm	83=83	27=2700K	20=20°		
	Z3=eldoLED DMX, 0%			10=965 lm	98=98	30=3000K	40=40°		10=965 lm	98=98	30=3000K	40=40°		
	Z4=Lutron Hi-Lume™ LDE1, 0-10V, 0%			13=1300 lm		35=3500K	60=60°		13=1300 lm		35=3500K	60=60°		
	Z5=Lutron Hi-Lume™ LTEA, Phase, 1%			20=2000 lm		40=4000K			20=2000 lm		40=4000K			
	Z6=Lutron 5-Series™ LDE5, 0-10V, 5%			30=3000 lm (83 CRI only)					30=3000 lm (83 CRI only)					

Example Part Number: **K3SU-N1V-13832710NN-208304060NN-L1**


K AQUA 300 Square LX Up+Down Sconce - **I**ntegrated Driver, **1** Circuit, 0-10V Dim - Up: 1300lm, 83CRI, 2700K, 10° - Down: 2000lm, 83CRI, 4000K, 60° - **L1** Gloss White



AQUA 300 SQUARE LX

UP + DOWN SCONCE

DIMENSIONS

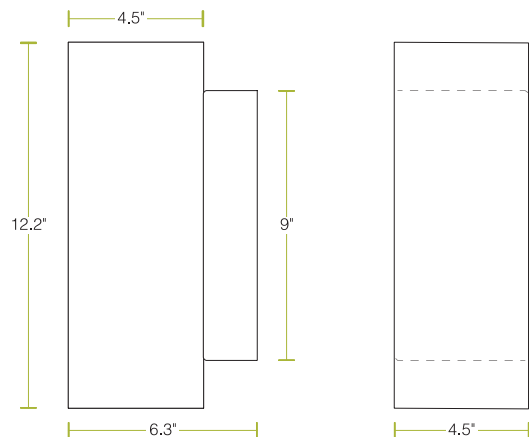

Canopy fits standard 3.5" and 4"
round and octagonal junction boxes

Not to scale, dimensions are nominal
Go to www.v2LightingGroup.com for CAD drawings

LED OPTIONS

Reflector Option	LED Specifications					
	LES ¹	L70 ²	CRI	Lumens ^{3,4,5}	Wattage ⁶	Efficacy ⁷ (lm/W)
10°	9mm	> 33,000 hours	Ra = 83 ±3	720	7.4	97
				965	10.9	89
				1300	15.6	83
			Ra = 98 R9 ≥ 90 R15 ≥ 95	700	10.6	66
				930	15.2	61
20°, 40°, 60°	19mm	> 55,000 hours	Ra = 83 ±3	1300	23.6	55
				720	4.5	160
				965	6.6	146
				1300	9.5	137
				2000	15.2	131
				3000	25.7	117
			Ra = 98 R9 ≥ 90 R15 ≥ 95	720	6.3	114
				965	9.2	104
				1300	13.3	98
				2000	20.0	100

¹ LES: Light Emitting Surface diameter

² 70% lumen maintenance based on IESNA LM-80-08 and TM-21

³ ±10%

⁴ Typical source lumens - see photometrics on page 3 for LOR to calculate delivered lumens

⁵ Higher lumen outputs are available in AQUA 400 series

⁶ Typical luminaire wattage including LED driver = LED wattage x 1.2

⁷ Higher efficacies may be available via lower drive currents - consult factory

CONTROL OPTIONS

Driver Option	Ordering Code	Description
Standard	N	No dimming
LED Drivers* (included in base price)	V	0-10V dimming to 10%
	P	Phase dimming to 10%
		Compatible with both forward and reverse phase dimmers
Optional LED Drivers*	Z1	eldoLED, 0-10V dimming to 0%
	Z2	eldoLED, DALI dimming to 0%
	Z3	eldoLED, DMX dimming to 0%
	Z4	Lutron Hi-lume™, EcoSystem to 1% with Fade-to-Black (-LDE1)
	Z5	Lutron Hi-lume™, Forward phase dimming to 1% (-LTEA)
	Z6	Lutron 5-series, EcoSystem to 5% (-LDE5)

* Standard LED drivers are suitable for Wet Location

* Optional LED drivers are suitable for Damp Location remote mount only

* For EM applications:

v2's Remote EM Solution is compatible with all LED options

All LED drivers may be used with 3rd party inverter style systems



AQUA 300 SQUARE LX

UP + DOWN SCONCE

PHOTOMETRICS

LM-79-08 IES files available at www.v2LightingGroup.com/downloads

Beam Angle	Order Code	Polar Plot (cd) (1000lm)	Intensity Plot (cd) (1000lm)	Cone Diagram (1000lm)	Description
10°	10				CBCP = 15,815cd Beam Angle = 9.4° Field Angle = 17.9° LOR = 88 % BUG = B1-U0-G0 Beam = full width @50% max Field = full width @10% max
20°	20				CBCP = 5,559cd Beam Angle = 17.1° Field Angle = 37.9° LOR = 96 % BUG = B1-U0-G0 Beam = full width @50% max Field = full width @10% max
40°	40				CBCP = 1,656 cd Beam Angle = 39.8° Field Angle = 73.2° LOR = 89 % BUG = B1-U0-G0 Beam = full width @50% max Field = full width @10% max
60°	60				CBCP = 970 cd Beam Angle = 61.8° Field Angle = 82.3° LOR = 88 % BUG = B1-U0-G0 Beam = full width @50% max Field = full width @10% max

Optical Accessories:

Use the ordering code shown below in the ordering logic on page 1

- NN** None
- HL** Honeycomb Louver (available for down direction only)
- DF** Diffuser Lens
- LS** Linear Spread Lens - spreads beam to left and right
- WW** Wall Wash Lens - tilts beam 20° towards wall
- FT** Forward Throw Lens - tilts beam 20° away from wall



AQUA 300 SQUARE LX

UP + DOWN SCONCE

COLOR OPTIONS

Basic Powder Coat



GW
Gloss White



SW
Satin White
AW Antimicrobial option



TW
Textured Matte White



TB
Textured Matte Black

Satin Anodized Effect Powder Coat



CS
Clear Silver



OB
Oil-Rubbed Bronze




DB
Dark Bronze



SB
Satin Black

Metallic Powder Coat



SG
Silver Gray



CG
Charcoal Gray



CU
Copper



BR
Brass

Gloss Powder Coat (80-95% Gloss)



GO
Orange
(RAL 2003)



GR
Red
(RAL 3020)



GM
Magenta
(RAL 4010)



GB
Blue
(RAL 5015)

Aluminum



BA
Brushed Aluminum
Cost adder applies.

Special Order



RAL _ _ _ _
Most RAL Classic Colors (80-95% Gloss) are available for powder coat - consult ALW. Minimum setup fee applies.
See: alwusa.com/finishes for more information



CAT _ _ _ _
The complete range of powder coat colors from the Tiger Drylac and TCI catalogs are available - consult ALW. Minimum setup fee applies.

Custom



CCM _ _ _ _
Custom powder coat color matching is available - consult ALW. Premium setup fee applies.

Printed or on-screen colors are only approximations - consult actual Color Chip Set before specifying
Note: An individual setup fee will apply to each unique Special Order/Custom Finish per purchase order.
(ex: RAL 5023 and RAL 2008 are specified for multiple line items on a purchase order. 2x setup fees will apply)