





in fixture wireless control module, features

wiSCAPE® available with in fixture wireless

lighting for the required 90 minute path of egress

temperatures -25°C to 40°C. RWL1 battery is

control module, features dimming and

Battery Backup suitable for operating

© 2022 Hubbell Outdoor Lighting, a division of Hubbell Lighting, Inc. Specifications subject to change without notice.

12.5W RWL2 battery is 18W

701 Millennium Blvd • Greenville, SC 29607 / Tel 864.678.1000 / Website www.hubbelloutdoor.com

KEY DATA

1,300-18,800

119-148

L70>60K

6.5/16.5 (2.9/7.5)

HUBBELL® Lighting


Lumen Range

Efficacy Range (LPW)

Fixture Projected Life (Hours)

dimming and occupancy sensor

occupancy sensor

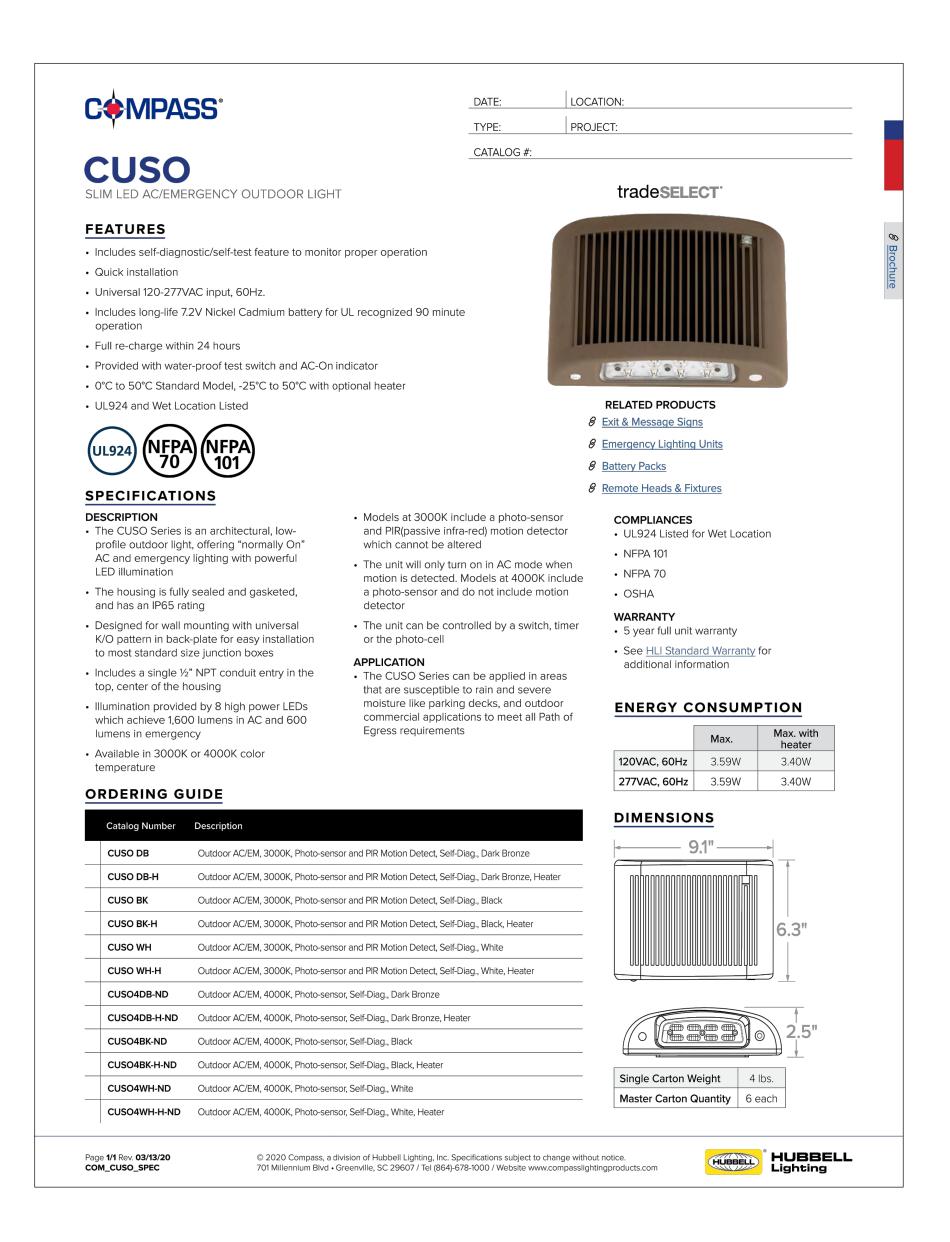

CAN LIGHT AT SOFFIT AREAS - FIXTURE A

LFR-6RDS_PRELIM

WALL LIGHT - FIXTURE B

Integral back box contains 1/2" conduit hubs

Integral back box standard with Dual Driver,

versions (battery versions for RWL1 only)

120V-277V universal voltage 50/60Hz 0-10V

• 347V and 480V dimmable driver option for all

dimming drivers

Page **1/7** Rev. **03/25/22**

RWLLED-SPEC

wattages above 35W.

Dual Power Feed, NX, Wiscape and battery

SECURITY LIGHT - FIXTURE C

GREGORY HITCHENS FEB 11 2022 REVISIONS <u>2</u> 7-18-22 city revisions PROPOSED OFIICE WAREHOUSE BUILDING

> 3962 E. OASIS CIRCLE MESA, ARIZONA

LIGHTING **CUT SHEETS**

22201

4-22-2022

GLH

PROJECT NO: