

MODEL
1035 6" Cylinder, pendant
Requested stem length (standard is 36") —
LEDCOB1 17W LED module, 2660 Lumens
LEDCOB2 25W LED module, 3745 Lumens
LEDCOB3 35W LED module, 5160 Lumens
1060 8" Cylinder, pendant
Requested stem length (standard is 36") —
1061 8" Cylinder, pendant (with decorative dome)
Requested stem length (standard is 36") —
LEDCOB1 17W LED module, 2660 Lumens
LEDCOB2 25W LED module, 3745 Lumens
LEDCOB3 35W LED module, 5160 Lumens
LEDCOB4 55W LED module, 7545 Lumens

COLOR TEMPERATURE
3K 3000°K
35K 3500°K
4K 4000°K (Standard)
5K 5000°K

Standard color temperature should be more cool and what more efficient


BEAM SPREAD
40D 40 Degree beam spread
70D 70 Degree beam spread

SPECIFICATION
• Cast aluminum ballast housing is attached to a spun aluminum cylindrical housing.
• A cast aluminum stem adaptor is attached the ballast housing.
• Anodized aluminum reflector to maximize the light output and a black multi-step baffle to reduce glare.
• Can hang straight on a ceiling sloped up to 30° includes the option of a field adjustable stem.
• Luminaire can be enclosed with a clear, frosted or prismatic flat glass; can be left open for interior use.
• All components undergo a rigorous pre-paint treatment and are coated with baked powder coat paint, giving them a highly durable finish.


VOLTAGE
12 120V
20 208V
27 277V
34 347V (Only available for certain wattages and light sources)

FINISH
BK Black
WH White
SL Silver
BR Bronze
GG Graphite
CC Custom

OPTION
F Fused
PG Prismatic lens
FL Frosted lens
FG Flat glass
FA Field adjustable stem
SH Smooth housing
0/10LED Dimmable LED driver for 0-10V systems

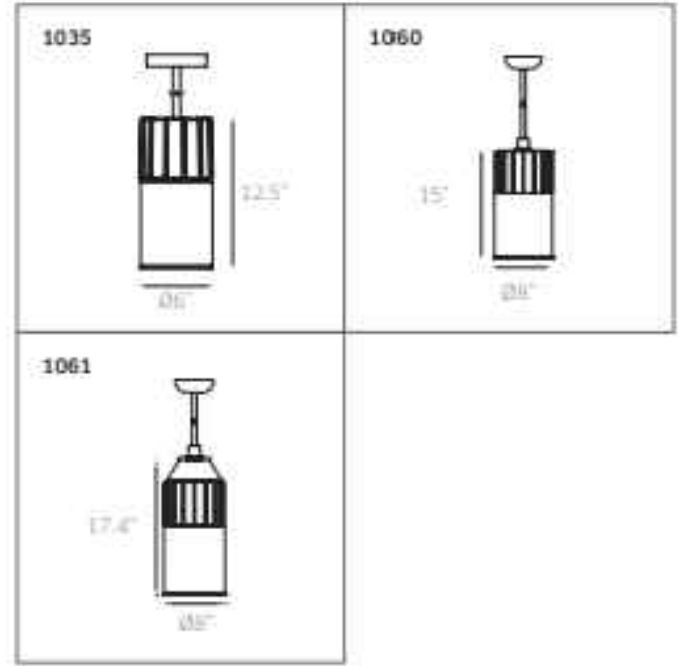

ORDERING EXAMPLE
1061-36-LEDCOB3-4K-40D-12-BK
This would order
Model: 1061
Stem length: 36"
Light source: 35W LED module, 5160 Lumens
Color temperature: 4000°K
Beam spread: 40 Degree beam spread
Voltage: 120V
Finish: Black

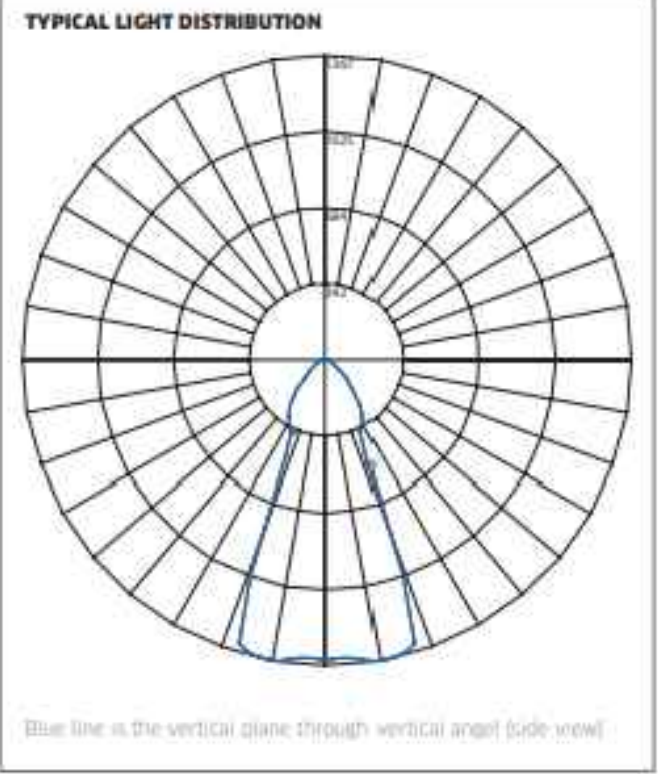

Visit our website for LED files.



1035, 1060, 1061 |

CYLINDERS

This rugged cast aluminum cylinder is offered in 2 sizes, to be pendant mounted with varying stem lengths. This pendant cylinder is ideal for downlighting applications and the LED module now allows for different beam spreads.

Key features
• LED module comes with different beam angles
• Available in 2 sizes
• Optional smooth housing available on 8" model