


Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
PROPERTY LINE LIGHT SPILL @ 36" AFG	✕	0.1 fc	0.4 fc	0.0 fc	N/A	N/A
SITE FC AFG	+	2.3 fc	16.7 fc	0.1 fc	167.0:1	23.0:1

Symbol	Label	Image	QTY	Manufacturer	Catalog Number	Description	Lumen	Number Lumen	Efficiency	Lumen Utilizable	LLT	Wattage	Efficiency	Control	Pole Hgt	Notes	
	EM		8	LITHONIA	AFN PND	DEL-CAST ARCHITECTURAL, EMERGENCY LIGHT WITH CAST ALUMINUM HOUSING, TWO LED LAMPS, POLYCARBONATE PRESERVE LENS, AND FORWARD-THROW OPTICS	4000K LED	2	APPL_FWS006	190	1	0	6	50%	DIRECT, SC, 9900L		
	S1		6	LITHONIA	DSK2 LED P14N T7M MVOLT SPA D0800 / CEN-FWC 22.5 SSS POLE W/ 2.5' BASE	DSK2 AREA LIGHT WITH P1 PERFORMANCE PACKAGE & T7M FORWARD THROW OPTIC MOUNTED @ 25' AFS	4000K LED	1	DSK2_LED_P14N_T7M_FWD LT.8m	50720	1	0.91	431	100%	TYPE VS BACK, B3-L01-05	-----	
	S2		6	LITHONIA	DSK2 LED P14N T7Tm MVOLT SPA D0800 / CEN-FWC 22.5 SSS POLE W/ 2.5' BASE	DSK2 AREA LIGHT WITH P1 PERFORMANCE PACKAGE & T7Tm FORWARD THROW OPTIC MOUNTED @ 25' AFS	4000K LED	1	DSK2_LED_P14N_T7Tm_FWD LT.8m	33360	1	0.91	270	100%	TYPE IV BACK, B3-L01-05	-----	
	S3		1	Lithonia Lighting	DSK2 LED P14N T7Tm MVOLT SPA D0800 / CEN-FWC 22.5 SSS POLE W/ 2.5' BASE	DSK2 AREA LIGHT WITH P1 PERFORMANCE PACKAGE & T7Tm FORWARD THROW OPTIC W/ HOUSE SIDE SHIELD MOUNTED @ 25' AFS	4000K LED	1	DSK2_LED_P14N_T7Tm_FWD LT.75.8m	24100	1	0.91	270	100%	TYPE III VERT SHORT, B3-L01-04	-----	
	S4		3	LITHONIA	DSK2 LED P14N T7Tm MVOLT SPA D0800 / CEN-FWC 22.5 SSS POLE W/ 2.5' BASE	DSK2 AREA LIGHT WITH P1 PERFORMANCE PACKAGE & T7Tm FORWARD THROW OPTIC MOUNTED @ 25' AFS	4000K LED	1	DSK2_LED_P14N_T7Tm_FWD LT.75.8m	22240	1	0.91	217	100%	TYPE III BACK, B3-L01-04	-----	
	S6		2	LITHONIA	DSK2 LED P14N BLC MVOLT SPA D0800 / CEN-FWC 22.5 SSS POLE W/ 2.5' BASE	DSK2 AREA LIGHT WITH P1 PERFORMANCE PACKAGE & BACK LIGHT CONTROL OPTIC MOUNTED @ 25' AFS	4000K LED	1	DSK2_LED_P14N_BLC_FWD LT.8m	23185	1	0.91	217	100%	TYPE II BACK, B3-L01-03	-----	
	W1		16	LITHONIA	DSK2 LED P14N T7Tm MVOLT SPA D0800 / T7Tm FORWARD THROW OPTIC WALL MOUNTED @ 25' AFS	DSK2 AREA LIGHT WITH P1 PERFORMANCE PACKAGE & T7Tm FORWARD THROW OPTIC WALL MOUNTED @ 25' AFS	4000K LED	1	DSK2_LED_P14N_T7Tm_FWD LT.8m	30060	1	0.91	270	100%	TYPE IV SHORT, B3-L01-05	-----	
	W2		2	LITHONIA	DSK2 LED P14N T7Tm MVOLT WBA HS D0800	DSK2 AREA LIGHT WITH P1 PERFORMANCE PACKAGE & T5 DUEM OPTIC W/ HOUSE SIDE SHIELD WALL MOUNTED @ 25' AFS	4000K LED	1	DSK2_LED_P14N_T7Tm_FWD LT.75.8m	24396	1	0.91	217	100%	TYPE III VERT SHORT, B3-L01-04	-----	
	W3		6	ALUM LIGHTING	K3SLANND070640-40W	QUIRE 300 LX 6000K	4000K LED	1	COVE QUIRE 300 LX 6000K W/ 20' HANGERS	730	1	0.91	4.5	79%			
	W4		14	BEGA Connected by LUMIDITY TESTED BY I.L.R.	B40W03		LED 19.2W	1	B40W03_BGA_15.5m	4914	1	1	66	100%		-----	



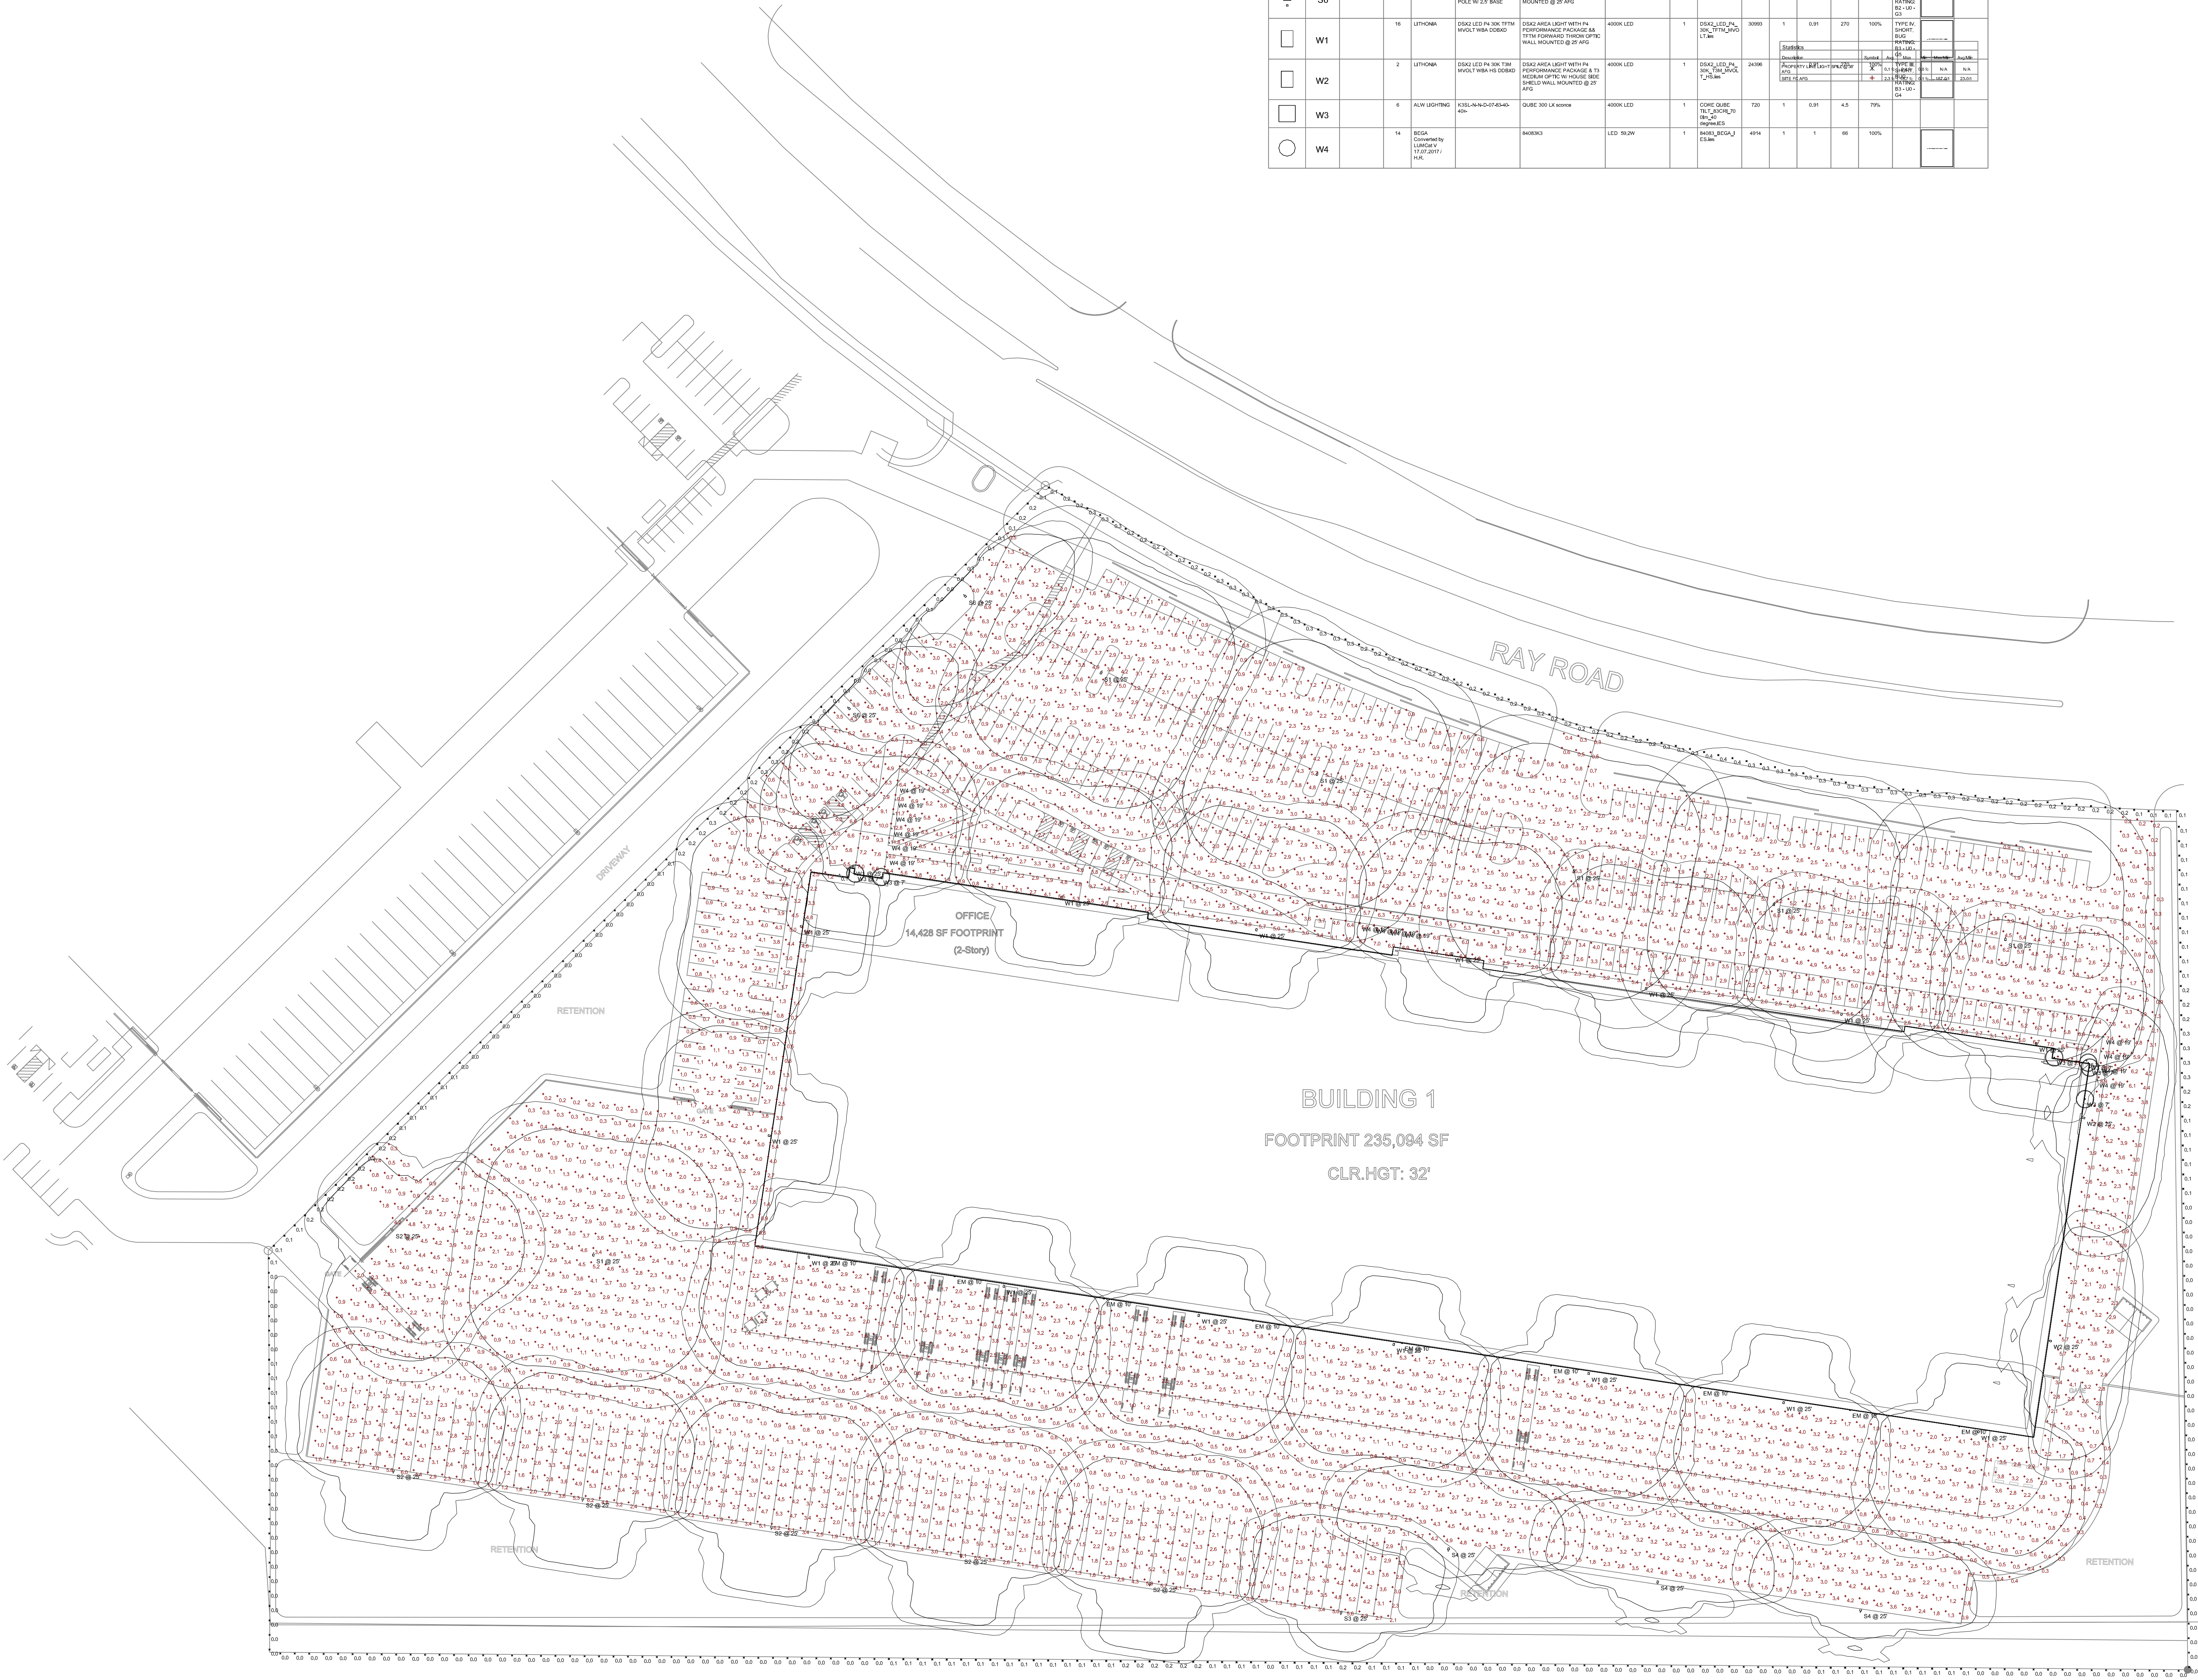


D-Series Size 2 LED Area Luminaire



d-series

Specifications

EPA:	1.1 ft ² (0.10 m ²)
Length:	40" (101.6 cm)
Width:	15" (38.1 cm)
Height:	7-1/4" (18.4 cm)
Weight (max):	36 lbs (16.3 kg)

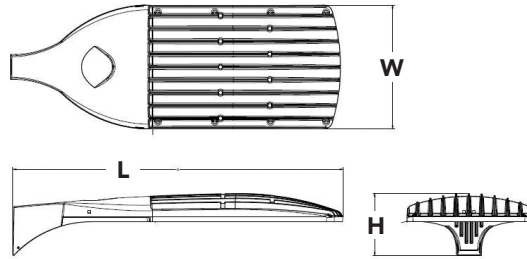

Catalog
Number

Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.

A+ Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and system-level interoperability.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is A+ Certified when ordered with DTL® controls marked by a **shaded background**. DTL DLL equipped luminaires meet the A+ specification for luminaire to photocontrol interoperability¹
- This luminaire is part of an A+ Certified solution for ROAM® or XPoint™ Wireless control networks, providing out-of-the-box control compatibility with simple commissioning, when ordered with drivers and control options marked by a **shaded background**¹

To learn more about A+, visit www.acuitybrands.com/aplus.

1. See ordering tree for details.
2. A+ Certified Solutions for ROAM require the order of one ROAM node per luminaire. Sold Separately: [Link to Roam](#); [Link to DTL DLL](#)



A+ Capable options indicated by this color background.

Ordering Information

EXAMPLE: DSX2 LED P7 T3M MVOLT SPA DDBXD

DSX2 LED									
Series	LEDs	Color temperature		Distribution		Voltage	Mounting		
DSX2 LED	Forward optics	30K	3000 K	T1S	Type I Short	T5VS	Type V Very Short	MVOLT ⁴	Shipped included
	P1 P5	40K	4000 K	T2S	Type II Short	T5S	Type V Short	120 ⁵	SPA Square pole mounting
	P2 P6	50K	5000 K	T2M	Type II Medium	T5M	Type V Medium	208 ⁵	RPA Round pole mounting
	P3 P7	AMBPC Amber phosphor converted ^{2,3}	T3S	Type III Short	T5W	Type V Wide	240 ⁵	WBA Wall bracket	
	P4 P8		T3M	Type III Medium	BLC	Backlight control ^{2,3}	277 ⁵	SPUMBA Square pole universal mounting adaptor ⁷	
	Rotated optics¹		T4M	Type IV Medium	LCCO	Left corner cutoff ^{2,3}	347 ^{5,6}	RPUMBA Round pole universal mounting adaptor ⁷	
	P10 P13		TFTM	Forward Throw Medium	RCCO	Right corner cutoff ^{2,3}	480 ^{5,6}	Shipped separately	
	P11 P14							KMA8 DDBXD U Mast arm mounting bracket adaptor (specify finish) ⁸	
	P12								
Control options				Other options		Finish <i>(required)</i>			
Shipped installed				Shipped installed					
PER	NEMA twist-lock receptacle only (no controls) ⁹			PIRH1FC3V	Bi-level, motion sensor, 15'-30' mounting height, ambient sensor enabled at 1fc ¹³	HS	House-side shield ¹⁷	DDBXD	Dark bronze
PER5	Five-wire receptacle only (no controls) ^{9,10}			BL30	Bi-level switched dimming, 30% ^{11,14}	SF	Single fuse (120, 277, 347V) ⁷	DBLXD	Black
PER7	Seven-wire receptacle only (no controls) ^{9,10}			BL50	Bi-level switched dimming, 50% ^{11,14}	DF	Double fuse (208, 240, 480V) ⁷	DNAXD	Natural aluminum
DMG	0-10V dimming extend out back of housing for external control (no controls)			PNMTDD3	Part night, dim till dawn ¹⁵	L90	Left rotated optics ¹	DWHXD	White
DS	Dual switching ^{11,12}			PNMT5D3	Part night, dim 5 hrs ¹⁵	R90	Right rotated optics ¹	DDBTXD	Textured dark bronze
PIRH	Bi-level, motion/ambient sensor, 15-30' mounting height, ambient sensor enable at 5fc ¹³			PNMT6D3	Part night, dim 6 hrs ¹⁵	BS	Bird spikes	DBLBXD	Textured black
				PNMT7D3	Part night, dim 7 hrs ¹⁵			DNATXD	Textured natural aluminum
				FAO	Field Adjustable Output ¹⁶			DWHGXD	Textured white



Ordering Information

Accessories

Ordered and shipped separately.


DLL127F 1.5 JU	Photocell - SSL twist-lock (120-277V) ¹⁸
DLL347F 1.5 CUL JU	Photocell - SSL twist-lock (347V) ¹⁸
DLL480F 1.5 CUL JU	Photocell - SSL twist-lock (480V) ¹⁸
DSHORT SBK U	Shorting cap ¹⁸
DSX2HS 80C U	House-side shield for 80 LED unit ⁴
DSX2HS 90C U	House-side shield for 90 LED unit ⁴
DSX2HS 100C U	House-side shield for 100 LED unit ⁴
PUMBA DDBXD U*	Square and round pole universal mounting bracket (specify finish) ¹⁹
KMA8 DDBXD U	Mast arm mounting bracket adaptor (specify finish) ¹⁷

For more control options, visit [DTL](#) and [ROAM](#) online.

NOTES


- P10, P11, P12 or P14 and rotated optics (L90, R90) only available together.
- AMBPC not available with BLC, LCCO, RCCO, HS or P5, P7, P8, P13 or P14.
- Not available with HS.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- Single fuse (SF) requires 120V, 277V or 347V. Double fuse (DF) requires 208V, 240V or 480V.
- Not available with BL30, BL50 or PNMT options.
- Existing drilled pole only. Available as a separate combination accessory; for retrofit use only: PUMBA (finish) U; 1.5 G vibration load rating per ANCI C136.31.
- Must order fixture with SPA option. Must be ordered as a separate accessory; see Accessories information. For use with 2-3/8" mast arm (not included).
- Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Not available with DS option. Shorting Cap included.
- If ROAM® node required, it must be ordered and shipped as a separate line item from Acuity Brands Controls. Node with integral dimming. Shorting Cap included.
- Requires (2) separately switched circuits. See Outdoor Control Technical Guide for details.
- Provides 50/50 fixture operation via (2) independent drivers. Not available with PER, PER5, PER7, PIR or PIRH.
- Reference Motion Sensor table on page 3.
- Not available with 347V, 480V, DS and PNMT. For PER5 or PER7 see PER Table on page 3.
- Not available with 347V, 480V, DS, BL30, BL50. For PER5 or PER7 see PER Table on page 3. Separate Dusk to Dawn required.
- Not available with other dimming controls options.
- Not available with BLC, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
- Requires luminaire to be specified with PER, PER5 and PER7 option. Ordered and shipped as a separate line item from Acuity Brands Controls.
- For retrofit use only.

External Glare Shield

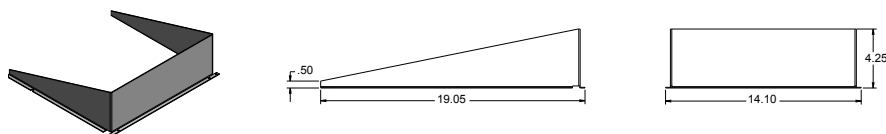

Drilling

HANDHOLE ORIENTATION



Tenon Mounting Slipfitter**

Tenon O.D.	Single Unit	2 at 180°	2 at 90°	3 at 120°	3 at 90°	4 at 90°
2-3/8"	AST20-190	AST20-280	AST20-290	AST20-320	AST20-390	AST20-490
2-7/8"	AST25-190	AST25-280	AST25-290	AST25-320	AST25-390	AST25-490
4"	AST35-190	AST35-280	AST35-290	AST35-320	AST35-390	AST35-490

Pole drilling nomenclature: # of heads at degree from handhole (default side A)


DM19AS	DM28AS	DM29AS	DM32AS	DM39AS	DM49AS
1 @ 90°	2 @ 280°	2 @ 90°	3 @ 120°	3 @ 90°	4 @ 90°
Side B	Side B & D	Side B & C	Round pole only	Side B, C, & D	Sides A, B, C, D

Note: Review luminaire spec sheet for specific nomenclature

Pole top or tenon O.D.	4.5" @ 90°	4" @ 90°	3.5" @ 90°	3" @ 90°	4.5" @ 120°	4" @ 120°	3.5" @ 120°	3" @ 120°
DSX SPA	Y	Y	Y	N	-	-	-	-
DSX RPA	Y	Y	N	N	Y	Y	Y	Y
DSX SPUMBA	Y	N	N	N	-	-	-	-
DSX RPUMBA	N	N	N	N	Y	Y	Y	N

*3 fixtures @ 120 require round pole top/tenon.


Template #8



Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [D-Series Area Size 2 homepage](#).

Isofootcandle plots for the DSX2 LED 80C 1000 40K. Distances are in units of mounting height (30').

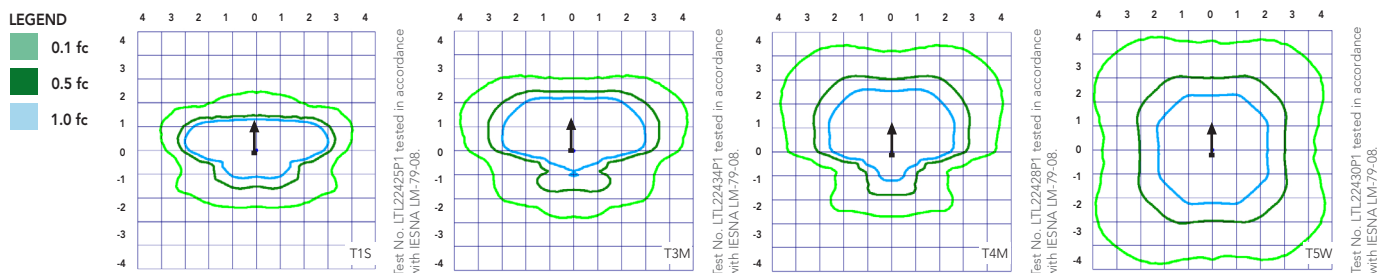

Performance Data

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.04
5°C	41°F	1.04
10°C	50°F	1.03
15°C	59°F	1.02
20°C	68°F	1.01
25°C	77°F	1.00
30°C	86°F	0.99
35°C	95°F	0.98
40°C	104°F	0.97

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25000	50000	100000
Lumen Maintenance Factor	1.00	0.96	0.92	0.85

Electrical Load

	Performance Package	LED Count	Drive Current	Wattage	Current (A)					
					120	208	240	277	347	480
Forward Optics (Non-Rotated)	P1	80	530	140	1.18	0.68	0.59	0.51	0.40	0.32
	P2	80	700	185	1.56	0.90	0.78	0.66	0.52	0.39
	P3	80	850	217	1.82	1.05	0.90	0.80	0.63	0.48
	P4	80	1050	270	2.27	1.31	1.12	0.99	0.79	0.59
	P5	80	1250	321	2.68	1.54	1.34	1.17	0.93	0.68
	P6	100	1050	343	2.89	1.66	1.59	1.37	1.00	0.71
	P7	100	1250	398	3.31	1.91	1.66	1.45	1.16	0.81
	P8	100	1350	431	3.61	2.07	1.81	1.57	1.25	0.91
Rotated Optics (Requires L90 or R90)	P10	90	530	156	1.30	0.76	0.65	0.62	0.45	0.32
	P11	90	700	207	1.75	1.01	0.87	0.74	0.60	0.46
	P12	90	850	254	2.12	1.22	1.06	0.94	0.73	0.55
	P13	90	1200	344	2.88	1.65	1.44	1.25	1.00	0.73
	P14	90	1400	405	3.39	1.95	1.71	1.48	1.18	0.86

Motion Sensor Default Settings

Option	Dimmed State	High Level (when triggered)	Photocell Operation	Dwell Time	Ramp-up Time	Ramp-down Time
PIR or PIRH	3V (37%) Output	10V (100%) Output	Enabled @ 5FC	5 min	3 sec	5 min
*PIR1FC3V or PIRH1FC3V	3V (37%) Output	10V (100%) Output	Enabled @ 1FC	5 min	3 sec	5 min

*for use with Inline Dusk to Dawn or timer.

PER Table

Control	PER (3 wire)	PER5 (5 wire)		PER7 (7 wire)		
			Wire 4/Wire5		Wire 4/Wire5	Wire 6/Wire7
Photocontrol Only (On/Off)	✓	⚠	Wired to dimming leads on driver	⚠	Wired to dimming leads on driver	Wires Capped inside fixture
ROAM	✗	✓	Wired to dimming leads on driver	⚠	Wired to dimming leads on driver	Wires Capped inside fixture
ROAM with Motion (ROAM on/off only)	✗	⚠	Wires Capped inside fixture	⚠	Wires Capped inside fixture	Wires Capped inside fixture
Future-proof*	✗	⚠	Wired to dimming leads on driver	✓	Wired to dimming leads on driver	Wires Capped inside fixture
Future-proof* with Motion	✗	⚠	Wires Capped inside fixture	✓	Wires Capped inside fixture	Wires Capped inside fixture

✓ Recommended
✗ Will not work
⚠ Alternate

*Future-proof means: Ability to change controls in the future.

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Forward Optics

LED Count	Drive Current	Power Package	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)					AMBPC (Amber Phosphor Converted)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
80	530	P1	140W	T1S	17,575	3	0	3	126	18,933	3	0	3	135	19,173	3	0	3	137	10,752	2	0	2	78
				T2S	17,556	3	0	3	125	18,913	3	0	3	135	19,152	3	0	3	137	10,554	2	0	2	77
				T2M	17,647	3	0	3	126	19,010	3	0	3	136	19,251	3	0	3	138	10,571	2	0	2	77
				T3S	17,090	3	0	3	122	18,411	3	0	3	132	18,644	3	0	3	133	10,548	2	0	2	77
				T3M	17,604	3	0	3	126	18,964	3	0	3	135	19,204	3	0	3	137	10,569	2	0	2	77
				T4M	17,221	3	0	3	123	18,552	3	0	4	133	18,787	3	0	4	134	10,547	2	0	2	77
				TFTM	17,593	3	0	3	126	18,952	3	0	4	135	19,192	3	0	4	137	10,741	1	0	2	78
				TSVS	18,297	4	0	1	131	19,711	4	0	1	141	19,961	4	0	1	143	11,155	3	0	0	81
				TSS	18,312	4	0	2	131	19,727	4	0	2	141	19,977	4	0	2	143	11,149	3	0	0	81
				TSM	18,266	4	0	2	130	19,677	4	0	2	141	19,926	4	0	2	142	11,096	3	0	2	81
				TSW	18,146	5	0	3	130	19,548	5	0	3	140	19,796	5	0	3	141	10,957	3	0	2	80
				BLC	14,424	2	0	2	103	15,539	2	0	3	111	15,736	2	0	3	112					
				LCCO	10,733	1	0	3	77	11,562	1	0	3	83	11,709	2	0	3	84					
				RCCO	10,733	1	0	3	77	11,562	1	0	3	83	11,709	2	0	3	84					
80	700	P2	185W	T1S	22,305	3	0	3	121	24,029	3	0	3	130	24,333	3	0	3	132	13362	2	0	2	71
				T2S	22,281	3	0	4	120	24,003	3	0	4	130	24,307	3	0	4	131	13116	2	0	2	70
				T2M	22,396	3	0	3	121	24,127	3	0	3	130	24,432	3	0	3	132	13138	2	0	2	70
				T3S	21,690	3	0	4	117	23,366	3	0	4	126	23,662	3	0	4	128	13110	2	0	2	70
				T3M	22,342	3	0	4	121	24,068	3	0	4	130	24,373	3	0	4	132	13135	2	0	3	70
				T4M	21,857	3	0	4	118	23,545	3	0	4	127	23,844	3	0	4	129	13108	2	0	2	70
				TFTM	22,328	3	0	4	121	24,054	3	0	4	130	24,358	3	0	4	132	13349	2	0	2	71
				TSVS	23,222	5	0	1	126	25,016	5	0	1	135	25,333	5	0	1	137	13864	3	0	1	74
				TSS	23,241	4	0	2	126	25,037	4	0	2	135	25,354	4	0	2	137	13856	3	0	1	74
				TSM	23,182	5	0	3	125	24,974	5	0	3	135	25,290	5	0	3	137	13790	3	0	2	73
				TSW	23,030	5	0	4	124	24,810	5	0	4	134	25,124	5	0	4	136	13617	4	0	2	72
				BLC	18,307	2	0	3	99	19,721	2	0	3	107	19,971	2	0	3	108					
				LCCO	13,622	2	0	3	74	14,674	2	0	4	79	14,860	2	0	4	80					
				RCCO	13,622	2	0	3	74	14,674	2	0	4	79	14,860	2	0	4	80					
80	850	P3	217W	T1S	26,202	3	0	3	121	28,226	3	0	3	130	28,584	3	0	3	132					
				T2S	26,174	3	0	4	121	28,196	3	0	4	130	28,553	3	0	4	132					
				T2M	26,309	3	0	3	121	28,342	3	0	3	131	28,700	3	0	3	132					
				T3S	25,479	3	0	4	117	27,448	3	0	4	126	27,795	3	0	4	128					
				T3M	26,245	3	0	4	121	28,273	3	0	4	130	28,631	3	0	4	132					
				T4M	25,675	3	0	4	118	27,659	3	0	4	127	28,009	3	0	4	129					
				TFTM	26,229	3	0	4	121	28,255	3	0	4	130	28,613	3	0	4	132					
				TSVS	27,279	5	0	1	126	29,387	5	0	1	135	29,759	5	0	1	137					
				TSS	27,301	4	0	2	126	29,410	5	0	2	136	29,783	5	0	2	137					
				TSM	27,232	5	0	3	125	29,336	5	0	3	135	29,707	5	0	3	137					
				TSW	27,053	5	0	4	125	29,144	5	0	4	134	29,513	5	0	4	136					
				BLC	21,504	2	0	3	99	23,166	2	0	3	107	23,459	2	0	4	108					
				LCCO	16,001	2	0	4	74	17,238	2	0	4	79	17,456	2	0	4	80					
				RCCO	16,001	2	0	4	74	17,238	2	0	4	79	17,456	2	0	4	80					
80	1050	P4	270W	T1S	30,963	4	0	4	115	33,355	4	0	4	124	33,777	4	0	4	125	18,125	2	0	2	64
				T2S	30,930	4	0	4	115	33,320	4	0	4	123	33,742	4	0	4	125	17,791	3	0	3	63
				T2M	31,089	3	0	4	115	33,491	3	0	4	124	33,915	3	0	4	126	17,821	3	0	3	63
				T3S	30,108	4	0	4	112	32,435	4	0	5	120	32,845	4	0	5	122	17,782	2	0	2	63
				T3M	31,014	3	0	4	115	33,410	3	0	4	124	33,833	3	0	4	125	17,817	3	0	3	63
				T4M	30,340	3	0	5	112	32,684	3	0	5	121	33,098	3	0	5	123	17,779	2	0	3	63
				TFTM	30,995	3	0	5	115	33,390	3	0	5	124	33,812	3	0	5	125	18,107	2	0	3	64
				TSVS	32,235	5	0	1	119	34,726	5	0	1	129	35,166	5	0	1	130	18,794	3	0	1	67
				TSS	32,261	5	0	2	119	34,754	5	0	2	129	35,194	5	0	2	130	18,805	3	0	1	67
				TSM	32,180	5	0	4	119	34,667	5	0	4	128	35,105	5	0	4	130	18,705	4	0	2	66
				TSW	31,969	5	0	4	118	34,439	5	0	5	128	34,875	5	0	5	129	18,740	4	0	2	66
				BLC	25,412	2	0	4	94	27,376	2	0	4	101	27,722	2	0	4	103					
				LCCO	18,909	2	0	4	70	20,370	2	0	4	75	20,628	2	0	4	76					
					18,909	2	0	4	70	20,370	2	0	4	75	20,628	2	0	4	76					

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Forward Optics

LED Count	Drive Current	Power Package	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)					AMBPC (Amber Phosphor Converted)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
80	1250	P5	321W	T1S	35,193	4	0	4	110	37,912	4	0	4	118	38,392	4	0	4	120	2,541	1	0	1	73
				T2S	35,155	4	0	5	110	37,872	4	0	5	118	38,351	4	0	5	119	2,589	1	0	1	74
				T2M	35,336	4	0	4	110	38,067	4	0	4	119	38,549	4	0	4	120	2,539	1	0	1	73
				T3S	34,222	4	0	5	107	36,866	4	0	5	115	37,333	4	0	5	116	2,558	1	0	1	73
				T3M	35,251	3	0	4	110	37,974	3	0	5	118	38,455	4	0	5	120	2,583	1	0	1	74
				T4M	34,485	3	0	5	107	37,149	4	0	5	116	37,620	4	0	5	117	2,570	1	0	1	73
				TFTM	35,229	3	0	5	110	37,951	3	0	5	118	38,431	3	0	5	120	2,540	1	0	1	73
				TSVS	36,639	5	0	1	114	39,470	5	0	1	123	39,970	5	0	1	125	2,650	1	0	0	76
				TSS	36,669	5	0	2	114	39,502	5	0	2	123	40,002	5	0	2	125	2,690	1	0	0	77
				TSM	36,576	5	0	4	114	39,403	5	0	4	123	39,901	5	0	4	124	2,658	2	0	0	76
				TSW	36,336	5	0	5	113	39,144	5	0	5	122	39,640	5	0	5	123	2,663	2	0	1	73
				BLC	28,884	3	0	4	90	31,115	3	0	4	97	31,509	3	0	4	98					
				LCCO	21,492	2	0	4	67	23,153	2	0	5	72	23,446	3	0	5	73					
				RCCO	21,492	2	0	4	67	23,153	2	0	5	72	23,446	3	0	5	73					
100	1050	P6	343W	T1S	37,824	4	0	4	110	40,747	4	0	4	119	41,263	4	0	4	120	3,144	1	0	1	70
				T2S	37,784	4	0	5	110	40,704	4	0	5	119	41,219	4	0	5	120	3,203	1	0	1	71
				T2M	37,979	4	0	4	111	40,913	4	0	4	119	41,431	4	0	4	121	3,141	1	0	1	70
				T3S	36,780	4	0	5	107	39,623	4	0	5	116	40,124	4	0	5	117	3,165	1	0	1	70
				T3M	37,886	3	0	5	110	40,814	4	0	5	119	41,331	4	0	5	120	3,196	1	0	1	71
				T4M	37,063	4	0	5	108	39,927	4	0	5	116	40,433	4	0	5	118	3,179	1	0	1	71
				TFTM	37,863	3	0	5	110	40,789	4	0	5	119	41,305	4	0	5	120	3,143	1	0	1	70
				TSVS	39,379	5	0	1	115	42,422	5	0	1	124	42,959	5	0	1	125	3,278	2	0	0	73
				TSS	39,411	5	0	2	115	42,456	5	0	2	124	42,993	5	0	2	125	3,328	2	0	0	74
				TSM	39,311	5	0	4	115	42,349	5	0	4	123	42,885	5	0	4	125	3,288	2	0	1	73
				TSW	39,053	5	0	5	114	42,071	5	0	5	123	42,604	5	0	5	124	3,295	2	0	1	73
				BLC	31,043	3	0	4	91	33,442	3	0	4	97	33,865	3	0	4	99					
				LCCO	23,099	2	0	5	67	24,884	3	0	5	73	25,199	3	0	5	73					
				RCCO	23,099	2	0	5	67	24,884	3	0	5	73	25,199	3	0	5	73					
100	1250	P7	398W	T1S	42,599	4	0	4	107	45,890	4	0	4	115	46,471	4	0	4	117					
				T2S	42,553	4	0	5	107	45,842	4	0	5	115	46,422	4	0	5	117					
				T2M	42,773	4	0	4	107	46,078	4	0	4	116	46,661	4	0	5	117					
				T3S	41,423	4	0	5	104	44,624	4	0	5	112	45,189	4	0	5	114					
				T3M	42,669	4	0	5	107	45,966	4	0	5	115	46,548	4	0	5	117					
				T4M	41,742	4	0	5	105	44,967	4	0	5	113	45,537	4	0	5	114					
				TFTM	42,643	4	0	5	107	45,938	4	0	5	115	46,519	4	0	5	117					
				TSVS	44,350	5	0	1	111	47,777	5	0	1	120	48,381	5	0	1	122					
				TSS	44,385	5	0	2	112	47,815	5	0	3	120	48,420	5	0	3	122					
				TSM	44,273	5	0	4	111	47,695	5	0	4	120	48,298	5	0	4	121					
				TSW	43,983	5	0	5	111	47,382	5	0	5	119	47,982	5	0	5	121					
				BLC	34,962	3	0	4	88	37,664	3	0	5	95	38,140	3	0	5	96					
				LCCO	26,015	3	0	5	65	28,025	3	0	5	70	28,380	3	0	5	71					
				RCCO	26,015	3	0	5	65	28,025	3	0	5	70	28,380	3	0	5	71					
100	1350	P8	448W	T1S	45,610	4	0	4	106	49,135	4	0	4	114	49,757	4	0	4	115					
				T2S	45,562	4	0	5	106	49,083	4	0	5	114	49,704	4	0	5	115					
				T2M	45,797	4	0	4	106	49,336	4	0	5	114	49,960	4	0	5	116					
				T3S	44,352	4	0	5	103	47,779	4	0	5	111	48,384	4	0	5	112					
				T3M	45,686	4	0	5	106	49,216	4	0	5	114	49,839	4	0	5	116					
				T4M	44,693	4	0	5	104	48,147	4	0	5	112	48,756	4	0	5	113					
				TFTM	45,657	4	0	5	106	49,186	4	0	5	114	49,808	4	0	5	116					
				TSVS	47,485	5	0	1	110	51,155	5	0	1	119	51,802	5	0	1	120					
				TSS	47,524	5	0	3	110	51,196	5	0	3	119	51,844	5	0	3	120					
				TSM	47,404	5	0	4	110	51,067	5	0	5	118	51,713	5	0	5	120					
				TSW	47,093	5	0	5	109	50,732	5	0	5	118	51,374	5	0	5	119					
				BLC	37,434	3	0	5	87	40,326	3	0	5	94	40,837	3	0	5	95					
				LCCO	27,854	3	0	5	65	30,006	3	0	5	70	30,386	3	0	5	71					
					27,854	3	0	5	65	30,006	3	0	5	70	30,386	3	0	5	71					

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Rotated Optics																								
LED Count	Drive Current	Power Package	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)					AMBPC (Amber Phosphor Converted)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
90	530	P10	156W	T1S	20,145	4	0	4	129	21,702	4	0	4	139	21,977	4	0	4	141	11,475	3	0	3	77
				T2S	20,029	4	0	4	128	21,577	4	0	4	138	21,850	4	0	4	140	11,448	3	0	3	76
				T2M	20,391	4	0	4	131	21,967	4	0	4	141	22,245	4	0	4	143	11,467	3	0	3	76
				T3S	19,719	4	0	4	126	21,242	4	0	4	136	21,511	4	0	4	138	11,442	3	0	3	76
				T3M	20,379	4	0	4	131	21,954	4	0	4	141	22,232	4	0	4	143	11,464	4	0	4	76
				T4M	19,995	4	0	4	128	21,540	4	0	4	138	21,812	5	0	5	140	11,440	4	0	4	76
				TFTM	20,511	4	0	4	131	22,096	5	0	5	142	22,376	5	0	5	143	11,651	4	0	4	78
				TSVS	20,655	4	0	1	132	22,251	4	0	1	143	22,533	4	0	1	144	12,288	3	0	1	82
				TSS	20,482	4	0	2	131	22,064	4	0	2	141	22,343	4	0	2	143	11,978	3	0	1	80
				TSM	20,477	5	0	3	131	22,059	5	0	3	141	22,338	5	0	3	143	12,301	4	0	2	82
				TSW	20,293	5	0	3	130	21,861	5	0	3	140	22,138	5	0	4	142	12,109	4	0	2	81
				BLC	16,846	4	0	4	108	18,148	4	0	4	116	18,378	4	0	4	118					
				LCCO	12,032	2	0	3	77	12,961	2	0	3	83	13,125	2	0	3	84					
				RCCO	12,016	4	0	4	77	12,944	4	0	4	83	13,108	4	0	4	84					
90	700	P11	207W	T1S	25,518	4	0	4	123	27,490	4	0	4	133	27,837	4	0	4	134	14,387	3	0	3	70
				T2S	25,371	5	0	5	123	27,331	5	0	5	132	27,677	5	0	5	134	14,354	3	0	3	70
				T2M	25,829	4	0	4	125	27,825	4	0	4	134	28,177	4	0	4	136	14,378	4	0	4	70
				T3S	24,977	5	0	5	121	26,907	5	0	5	130	27,248	5	0	5	132	14,347	4	0	4	70
				T3M	25,814	5	0	5	125	27,809	5	0	5	134	28,161	5	0	5	136	14,374	4	0	4	70
				T4M	25,327	5	0	5	122	27,284	5	0	5	132	27,629	5	0	5	133	14,344	4	0	4	70
				TFTM	25,981	5	0	5	126	27,989	5	0	5	135	28,343	5	0	5	137	15,408	4	0	1	75
				TSVS	26,164	5	0	1	126	28,185	5	0	1	136	28,542	5	0	1	138	15,019	4	0	1	73
				TSS	25,943	4	0	2	125	27,948	5	0	2	135	28,302	5	0	2	137	15,424	4	0	2	75
				TSM	25,937	5	0	3	125	27,941	5	0	3	135	28,295	5	0	3	137	14,609	4	0	4	71
				TSW	25,704	5	0	4	124	27,691	5	0	4	134	28,041	5	0	4	135	15,182	4	0	2	74
				BLC	21,339	4	0	4	103	22,988	4	0	4	111	23,279	4	0	4	112					
				LCCO	15,240	2	0	4	74	16,418	2	0	4	79	16,626	2	0	4	80					
				RCCO	15,220	5	0	5	74	16,396	5	0	5	79	16,604	5	0	5	80					
90	850	P12	254W	T1S	29,912	4	0	4	118	32,223	4	0	4	127	32,631	5	0	4	128					
				T2S	29,740	5	0	5	117	32,038	5	0	5	126	32,443	5	0	5	128					
				T2M	30,277	4	0	4	119	32,616	5	0	5	128	33,029	5	0	5	130					
				T3S	29,278	5	0	5	115	31,540	5	0	5	124	31,940	5	0	5	126					
				T3M	30,259	5	0	5	119	32,597	5	0	5	128	33,010	5	0	5	130					
				T4M	29,688	5	0	5	117	31,982	5	0	5	126	32,387	5	0	5	128					
				TFTM	30,455	5	0	5	120	32,808	5	0	5	129	33,224	5	0	5	131					
				TSVS	30,669	5	0	1	121	33,039	5	0	1	130	33,457	5	0	1	132					
				TSS	30,411	5	0	2	120	32,761	5	0	2	129	33,176	5	0	2	131					
				TSM	30,404	5	0	3	120	32,753	5	0	4	129	33,168	5	0	4	131					
				TSW	30,131	5	0	4	119	32,459	5	0	4	128	32,870	5	0	4	129					
				BLC	25,013	4	0	4	98	26,946	4	0	4	106	27,287	4	0	4	107					
				LCCO	17,865	2	0	4	70	19,245	2	0	4	76	19,489	2	0	4	77					
				RCCO	17,841	5	0	5	70	19,220	5	0	5	76	19,463	5	0	5	77					
90	1200	P13	344W	T1S	38,768	5	0	5	113	41,764	5	0	5	121	42,292	5	0	5	123					
				T2S	38,545	5	0	5	112	41,523	5	0	5	121	42,049	5	0	5	122					
				T2M	39,241	5	0	5	114	42,273	5	0	5	123	42,808	5	0	5	124					
				T3S	37,947	5	0	5	110	40,879	5	0	5	119	41,396	5	0	5	120					
				T3M	39,218	5	0	5	114	42,249	5	0	5	123	42,783	5	0	5	124					
				T4M	38,478	5	0	5	112	41,451	5	0	5	120	41,976	5	0	5	122					
				TFTM	39,472	5	0	5	115	42,522	5	0	5	124	43,060	5	0	5	125					
				TSVS	39,749	5	0	1	116	42,821	5	0	1	124	43,363	5	0	1	126					
				TSS	39,415	5	0	2	115	42,461	5	0	2	123	42,998	5	0	2	125					
				TSM	39,405	5	0	4	115	42,450	5	0	4	123	42,988	5	0	4	125					
				TSW	39,052	5	0	5	114	42,069	5	0	5	122	42,602	5	0	5	124					
				BLC	32,419	5	0	5	94	34,925	5	0	5	102	35,367	5	0	5	103					
				LCCO	23,154	3	0	5	67	24,943	3	0	5	73	25,259	3	0	5	73					
				RCCO	23,124	5	0	5	67	24,910	5	0	5	72	25,226	5	0	5	73					
90	1400	P14	405W	T1S	42,867	5	0	5	106	46,180	5	0	5	114	46,764	5	0	5	115					
				T2S	42,621	5	0	5	105	45,914	5	0	5	113	46,495	5	0	5	115					
				T2M	43,390	5	0	5	107	46,743	5	0	5	115	47,335	5	0	5	117					
				T3S	41,959	5	0	5	104	45,201	5	0	5	112	45,773	5	0	5	113					
				T3M	43,365	5	0	5	107	46,716	5	0	5	115	47,307	5	0	5	117					
				T4M	42,547	5	0	5	105	45,834	5	0	5	113	46,414	5	0	5	115					
				TFTM	43,646	5	0	5	108	47,018	5	0	5	116	47,614	5	0	5	118					
				TSVS	43,952	5	0	1	109	47,349	5	0	1	117	47,948	5	0	1	118					
				TSS	43,583	5	0	2	108	46,950	5	0	2	116	47,545	5	0	3	117					
				TSM	43,572	5	0	4	108	46,939	5	0	4	116	47,533	5	0	4	117					
				TSW	43,181	5	0	5	107	46,518	5	0	5	115	47,107	5	0	5	116					
				BLC	35,847	5	0	5	89	38,617	5	0	5	95	39,106	5	0	5	97					
				LCCO	25,602	3	0	5	63	27,580	3	0	5	68	27,930	3	0	5	69					
					25,569	5	0	5	63	27,544	5	0	5	68	27,893	5	0	5	69					

FEATURES & SPECIFICATIONS

INTENDED USE

The sleek design of the D-Series Area Size 2 reflects the embedded high performance LED technology. It is ideal for applications like car dealerships and large parking lots adjacent to malls, transit stations, grocery stores, home centers, and other big-box retailers.

CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED drivers are mounted in direct contact with the casting to promote low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65). Low EPA (1.1 ft²) for optimized pole wind loading.

FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

OPTICS

Precision-molded proprietary acrylic lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in 3000 K, 4000 K, or 5000 K (70 CRI) configurations. The D-Series Size 2 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

ELECTRICAL

Light engine configurations consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L85/100,000 hrs at 25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily-serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

INSTALLATION

Included mounting block and integral arm facilitate quick and easy installation. Stainless steel bolts fasten the mounting block securely to poles and walls, enabling the D-Series Size 2 to withstand up to a 2.0 G vibration load rating per ANSI C136.31. The D-Series Size 2 utilizes the AERIS™ series pole drilling pattern (Template #8). NEMA photocontrol receptacle is available.

LISTINGS

UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP65 rated. Rated for -40°C minimum ambient. U.S. Patent No. D670,857 S. International patent pending.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

WARRANTY

5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.





QUBE 300 LX


SCONCE

PROJECT

Job		Notes
Type		
Part #		

SPECIFICATIONS

- Source** Xicato XTM LED module - up to 3000 lumens
- CCT** 2700K, 3000K, 3500K or 4000K
- Color Consistency** 1x2 SDCM (MacAdam) along BBL, CCT +/- 40K to 70K, Duv +/- .001
- CRI (Ra)** 83 or 98
- Driver / Location** Included / Internal with remote or deep canopy options
- Dimming** 0-10V or phase dimming to 10% standard; DALI, DMX and 1% dimming available
- Input Voltage** 100 to 277VAC, phase dimmable versions are 120VAC only
- Power** Up to 36 watts max, depending on LED module / driver
- Reflector** 20°, 40° or 60° - field replaceable without tools
- Material** CNC machined aluminum with stainless steel hardware
- Finish** Powder coat - TGIC polyester for exterior and interior use
- Weight** 5 lb. [2.3 kg]
- Location** Listed for Wet & Damp locations
- Approvals** ETL Listed to UL 1598, 2108, 8750 and CSA C22.2# 9 & #250.0
- L80 Life** > 50,000 hours at 80% lumen maintenance based on IESNA LM-80-08
- Warranty** Lifetime Limited Warranty - see warranty for details
- IES Files** LM-79-08 IES files available
- Modifications** Any modification or customization is possible - consult factory

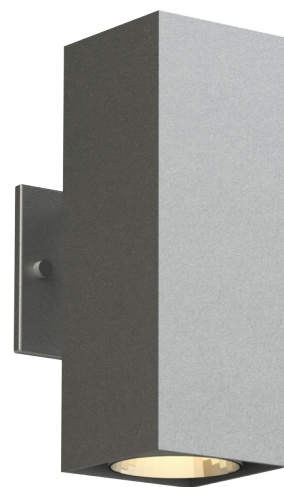

ORDERING LOGIC

Model	Driver Location	Dimming	Mounting Location	Output	CRI *	C.C.T.	Reflector	Shell Color	Options
Q3LS									
	N=Internal	N=None	D=Damp	07=700lm	83=83	27=2700K	20=20°	XX	
	R=Remote	P=Phase	W=Wet	10=950lm	98=98*	30=3000K	40=40°	(see chart on page 4)	
	D=Deep	V=0-10V		13=1300lm		35=3500K	60=60°		
	Canopy	Z=Other		20=2000lm		40=4000K		ZZ=Custom	
				30=3000lm					

* 98 CRI not available in 3000 lm

Example Part Number: **Q3LS-NND-20832740-S3**


QUBE 300 LX Sconce - **I**nternal Driver, **N**o Dimming, **D**amp Location - **2000** lm, **83** CRI, **2700K**, **40°** Reflector - **S3** Red Shell



QUBE 300 LX

SCONCE

DIMENSIONS

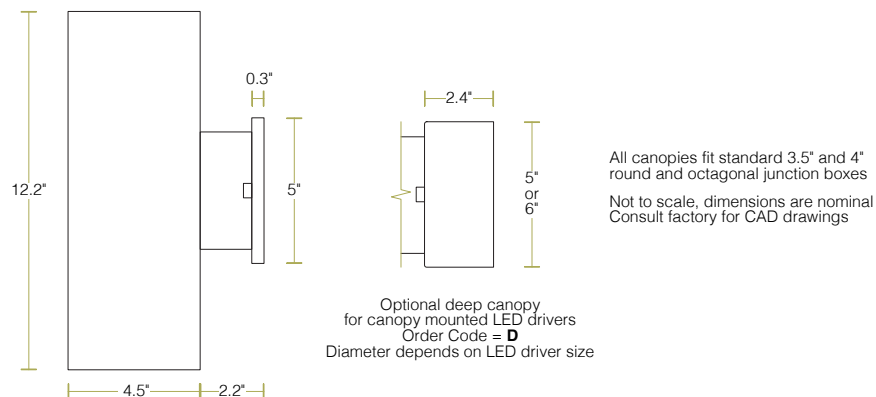

LED OPTIONS

Reflector Option	LES ¹	CRI	LED Specifications		
			Lumens ^{2,3,4}	Wattage ⁵ (W)	Efficacy ⁶ (lm/W)
20°, 40° & 60°	19mm	Ra = 83 ± 3	700	5.6	129
			950	8.2	118
			1300	11.7	111
			2000	19.5	102
			3000	29.3	102
		Ra = 98 R9 ≥ 90 R15 ≥ 95	700	7.4	97
			950	10.9	89
			1300	15.6	83
			2000	26.4	76

¹ LES: Light Emitting Surface diameter

² ±10%

³ Source lumens - see photometrics on page 3 for LOR to calculate delivered lumens

⁴ Higher lumen outputs are available in CORE / QUBE 400 series

⁵ Maximum luminaire wattage including LED driver = LED wattage x 1.2

⁶ Higher efficacies are available via lower drive currents - consult factory

CONTROL OPTIONS

Standard LED Drivers* (included in base price)	Order Code V = 0-10V dimming to 10%
	Order Code P = Phase dimming to 10% Compatible with both forward and reverse phase dimmers
Optional LED Drivers*	eldoLED 0-10V, DALI, or DMX dimming to 0%
	Lutron Hi-lume™ A-series, EcoSystem or forward phase dimming to 1% Lutron Hi-lume™ 5-series, EcoSystem dimming to 5%

* Standard LED drivers are suitable for Wet Location

* Optional LED drivers are suitable for Damp Location

* For EM applications:

All LED drivers may be used with 3rd party inverter style systems



QUBE 300 LX

SCONCE

PHOTOMETRICS

LM-79-08 IES files available

Beam Angle	Order Code	Intensity Plot (cd) (2000lm)	Polar Plot (cd) (2000lm)	Cone Diagram (2000lm)	Description												
20°	20			Illuminance at Center Beam Diameter <table><tr><td>5'</td><td>256 fc</td><td>1.9'</td></tr><tr><td>10'</td><td>64 fc</td><td>3.8'</td></tr><tr><td>15'</td><td>28 fc</td><td>5.7'</td></tr><tr><td>20'</td><td>16 fc</td><td>7.6'</td></tr></table>	5'	256 fc	1.9'	10'	64 fc	3.8'	15'	28 fc	5.7'	20'	16 fc	7.6'	CBCP = 3195 cd/klm Beam Angle = 21° Field Angle = 63° LOR = 89.4 % Beam = full width @ 50% Field = full width @ 90%
5'	256 fc	1.9'															
10'	64 fc	3.8'															
15'	28 fc	5.7'															
20'	16 fc	7.6'															
40°	40			Illuminance at Center Beam Diameter <table><tr><td>5'</td><td>129 fc</td><td>3.9'</td></tr><tr><td>10'</td><td>32 fc</td><td>7.9'</td></tr><tr><td>15'</td><td>14 fc</td><td>11.8'</td></tr><tr><td>20'</td><td>8 fc</td><td>15.7'</td></tr></table>	5'	129 fc	3.9'	10'	32 fc	7.9'	15'	14 fc	11.8'	20'	8 fc	15.7'	CBCP = 1607 cd/klm Beam Angle = 43° Field Angle = 73° LOR = 88.7 % Beam = full width @ 50% Field = full width @ 90%
5'	129 fc	3.9'															
10'	32 fc	7.9'															
15'	14 fc	11.8'															
20'	8 fc	15.7'															
60°	60			Illuminance at Center Beam Diameter <table><tr><td>5'</td><td>84 fc</td><td>5.6'</td></tr><tr><td>10'</td><td>21 fc</td><td>11.3'</td></tr><tr><td>15'</td><td>9 fc</td><td>16.9'</td></tr><tr><td>20'</td><td>5 fc</td><td>22.6'</td></tr></table>	5'	84 fc	5.6'	10'	21 fc	11.3'	15'	9 fc	16.9'	20'	5 fc	22.6'	CBCP = 1050 cd/klm Beam Angle = 59° Field Angle = 86° LOR = 85.2 % Beam = full width @ 50% Field = full width @ 90%
5'	84 fc	5.6'															
10'	21 fc	11.3'															
15'	9 fc	16.9'															
20'	5 fc	22.6'															

Beam Shaping Options

Add the order code shown below to the options box at the end of the part number:

Order Code Description

- HL** Honeycomb Louver
- DF** Diffusion Lens
- SF** Satin finish on any standard reflector
- LS** Linear Spread Lens (60° x 1°)
- WW** Wall Wash Lens (shifts beam 20° from vertical)



QUBE 300 LX

SCONCE

COLOR OPTIONS

Basic Powder Coat



GW
Gloss White



SW
Satin White
AW Antimicrobial option



TW
Textured
Matte White



TB
Textured
Matte Black

Satin Anodized Effect Powder Coat



CS
Clear Silver



OB
Oil-Rubbed
Bronze



DB
Dark Bronze




SB
Satin Black

Metallic Powder Coat



SG
Silver Gray



CG
Charcoal
Gray



CU
Copper



BR
Brass

Gloss Powder Coat (80-95% Gloss)



GO
Orange
(RAL 2003)



GR
Red
(RAL 3020)



GM
Magenta
(RAL 4010)



GB
Blue
(RAL 5015)

Aluminum



BA
Brushed Aluminum
Cost adder applies.

Special Order



RAL _ _ _ _
Most RAL Classic Colors (80-95% Gloss) are available for powder coat - consult ALW. Minimum setup fee applies. See: alwusa.com/finishes for more information



CAT _ _ _ _
The complete range of powder coat colors from the Tiger Drylac and TCI catalogs are available - consult ALW. Minimum setup fee applies.

Custom



CCM _ _ _ _
Custom powder coat color matching is available - consult ALW. Premium setup fee applies.

Printed or on-screen colors are only approximations - consult actual Color Chip Set before specifying
Note: An individual setup fee will apply to each unique Special Order/Custom Finish per purchase order.
(ex: RAL 5023 and RAL 2008 are specified for multiple line items on a purchase order. 2x setup fees will apply)