
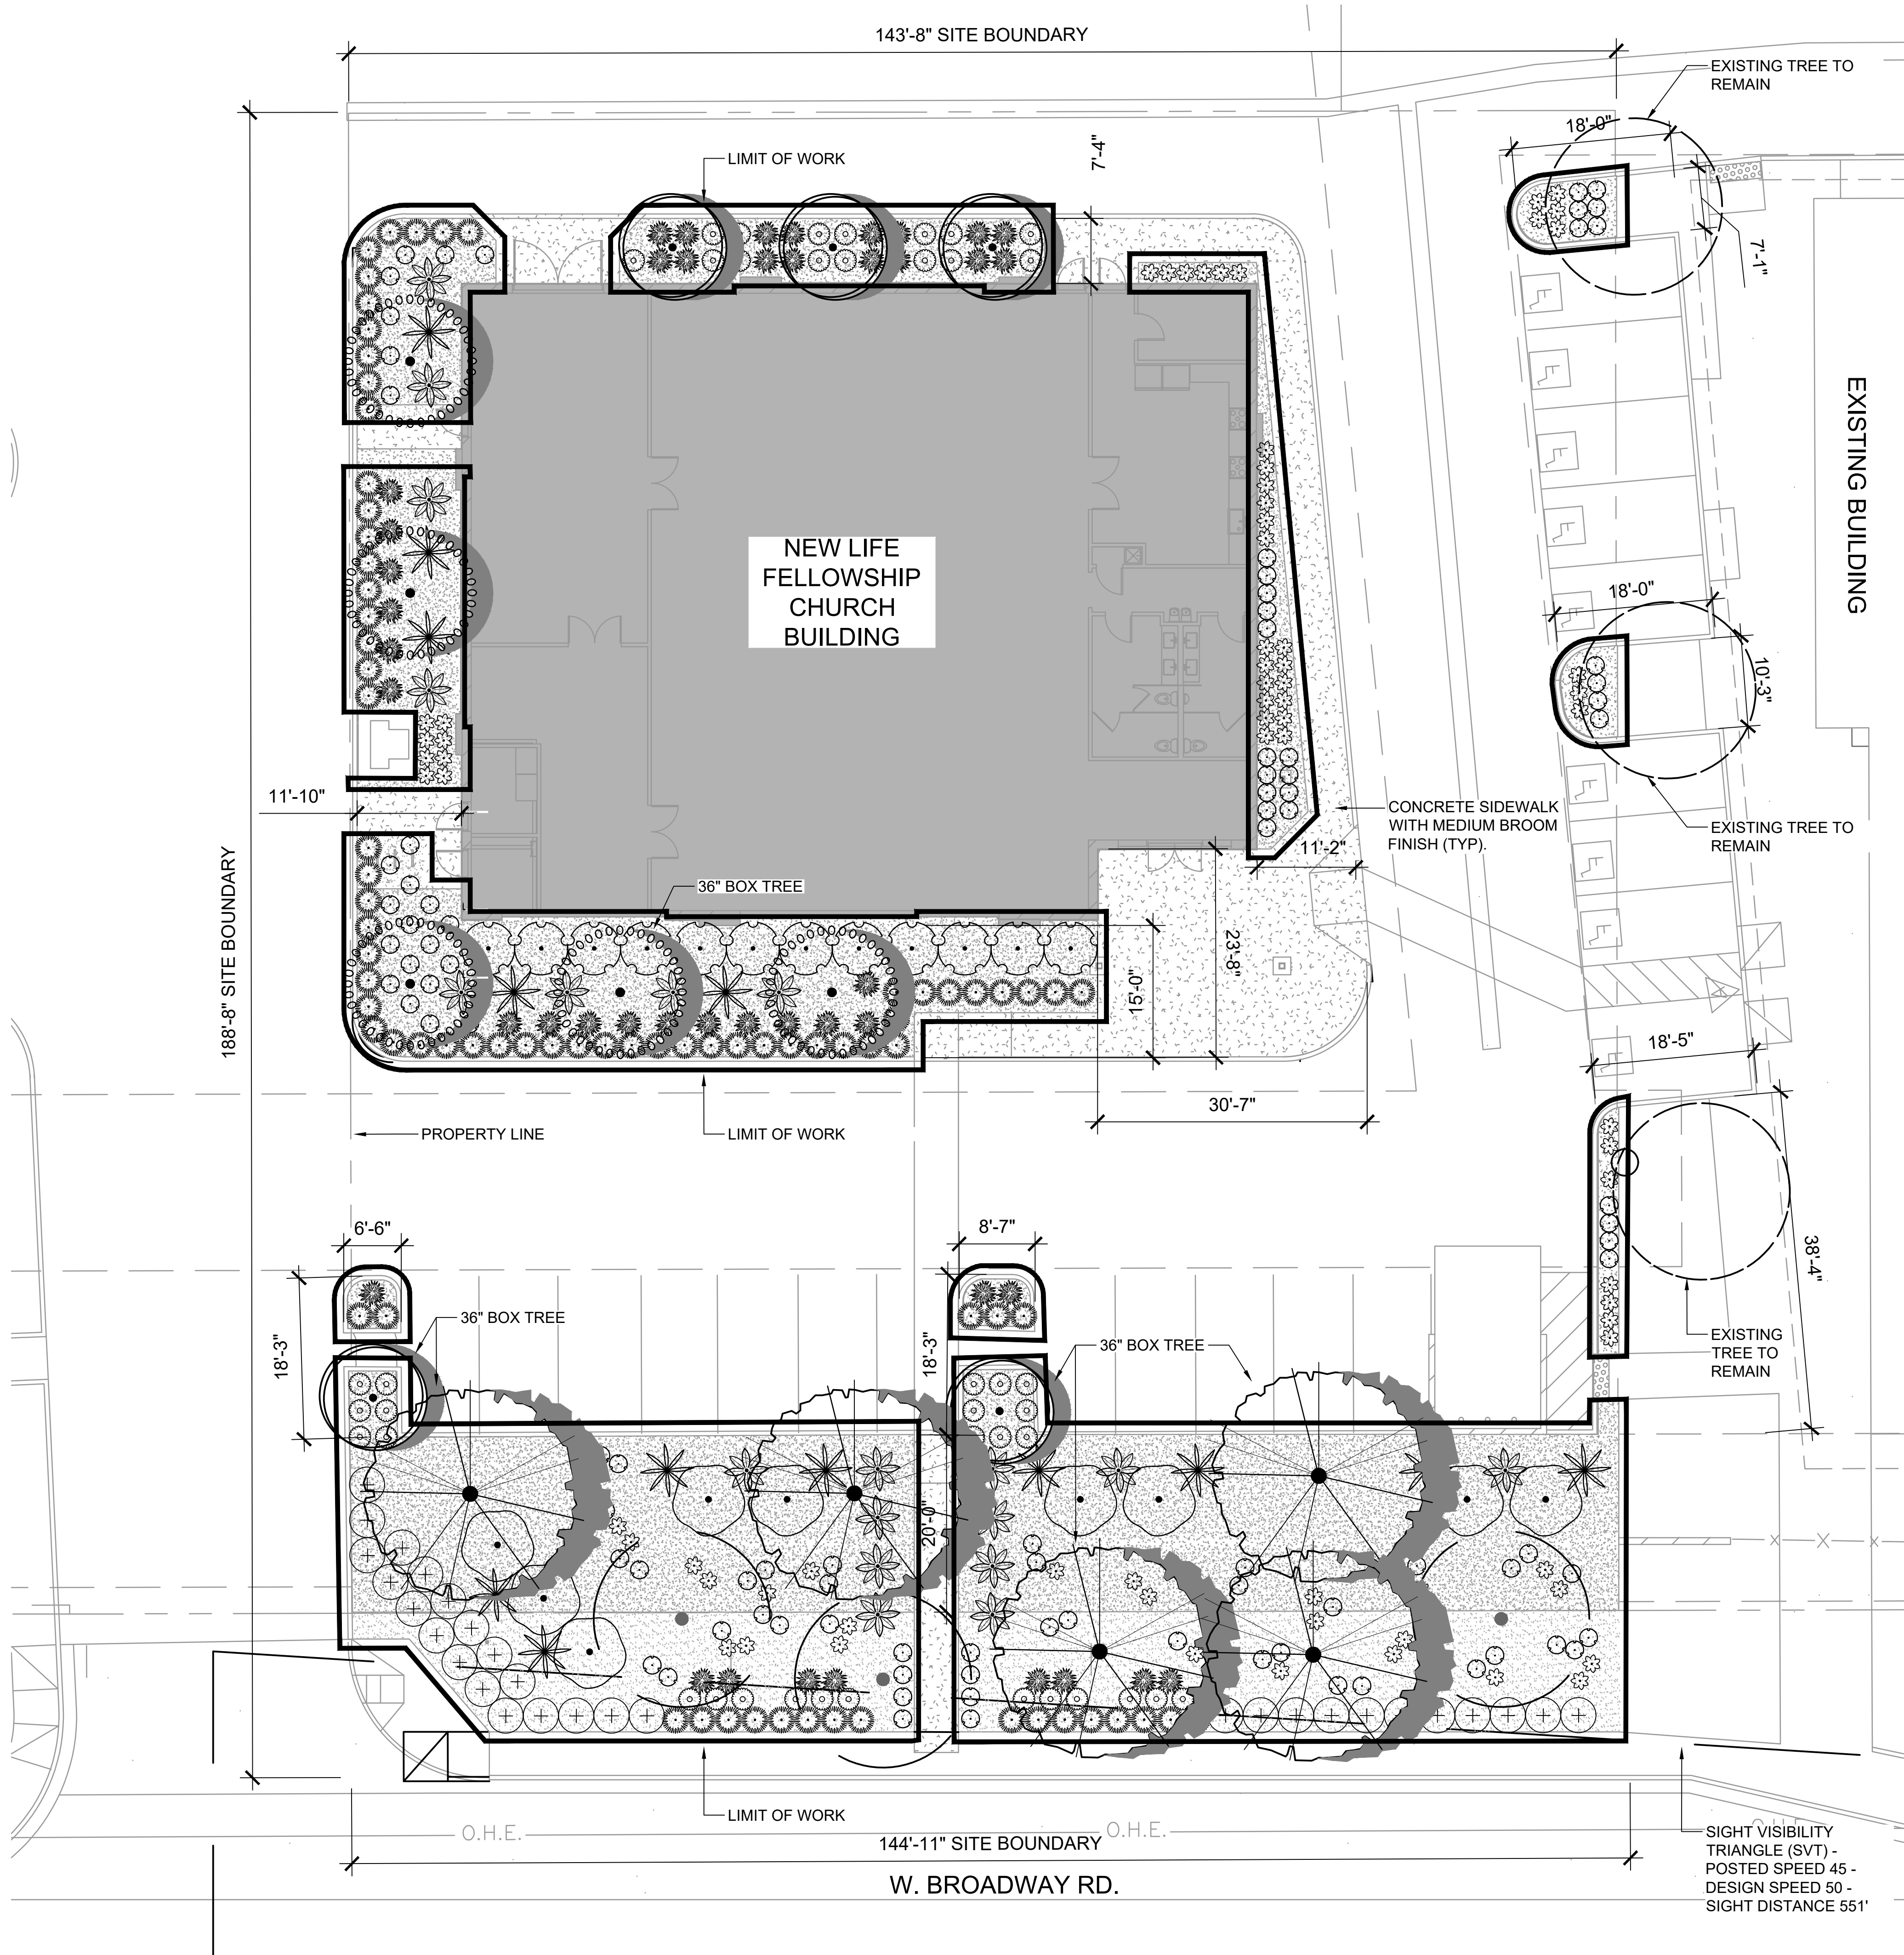





© Copyright, Coleman Design Group, PLLC. – This plan document set is the sole property of CDG. No alterations to these plans, other than adding "as-built" information, are allowed by anyone other than authorized CDG employees.



PLANT SCHEDULE

SYMBOL	QTY	BOTANICAL / COMMON NAME	SIZE	CAL	REMARKS
TREES					
	5	Acacia aneura Mulga	(3) 24" box (2) 36" box	Cal 1.0"	25 s.f. each
	5	Chilopsis linearis Desert Willow	(4) 24" box (1) 36" box	Cal 1.0"	25 s.f. each
	3	Existing Mesquite Tree	-		50 s.f. each
	5	Prosopis glandulosa `Thornless AZ` Thornless Honey Mesquite	36" box Multi-trunk	Cal 2.0"	50 s.f. each
SYMBOL	QTY	BOTANICAL / COMMON NAME	SIZE	REMARKS	
SHRUBS					
	19	Bougainvillea x `Torch Glow` Torch Glow Bush Bougainvillea	5 gal	Can Full	50 s.f. each
	9	Caesalpinia pulcherrima Red Bird Of Paradise	5 gal	Can Full	50 s.f. each
	12	Tecoma x `Sparky` Sparky Yellow Bells	15 gal		50 s.f. each
ACCENTS					
	97	Euphorbia rigida Gopher Plant	5 gal	Can Full	10 s.f. each
	13	Hesperaloe funifera Giant Hesperaloe	5 gal	Can Full	25 s.f. each
	44	Hesperaloe parviflora Red Yucca	5 gal	Can Full	25 s.f. each
	78	Muhlenbergia capillaris `Lenca` Regal Mist® Pink Muhly Grass	5 gal		10 s.f. each
GROUNDCOVERS AND PERENNIALS					
	41	Convolvulus cneorum Bush Morning Glory	1 gal	Can Full	5 s.f. each
	30	Lantana camara `New Gold` New Gold Lantana	1 gal	Can Full	25 s.f. each
	72	Ruellia brittoniana `Katie` Katie's Ruellia	1 gal	Can Full	25 s.f. each
SYMBOL	QTY	BOTANICAL / COMMON NAME	TYPE/SIZE	REMARKS	
MISCELLANEOUS					
	7,139 sf	Palo Verde Brown Granite	1/2" Screened	2" Deep	

PLANTING REQUIREMENTS

FOUNDATION BASE LANDSCAPE
REQUIRED: 1 TREE PER 50 FT EXTERIOR WALL LENGTH
325 FT EXTERIOR WALL = 7 TREES (10% TO BE 36"BOX)
PROVIDED: 8 TREES

STREET FRONTAGE LANDSCAPE
REQUIRED: 1 TREE & 6 SHRUBS PER 25 LINEAR FEET
BROADWAY ROAD 143 LINEAR FEET = 6 TREES AND 36 SHRUBS
PROVIDED: 8 TREES AND 179 SHRUBS


PARKING ISLAND LANDSCAPE
REQUIRED: 1 TREE AND 3 SHRUBS PER 15' FOOT PARKING ISLAND (10% TO BE 36" BOX)
PROVIDED: 1 TREE AND 3 OR MORE SHRUBS PER PARKING ISLAND

TOTAL VEGETATION COVERAGE (PER CITY OF MESA TABLE 11-33-2-E)
= 8,505 S.F.

OPEN SPACE
7,421 S.F. = 87%

SITE -NO PARKING
15,575 S.F. = 55%

SITE & OFFSITE LANDSCAPE
26,267 S.F. = 28%

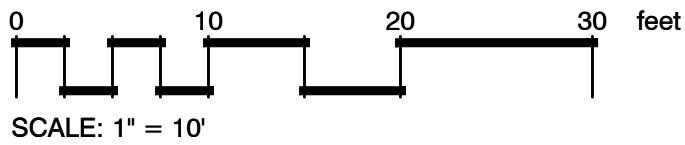

REGISTRATION:


DESIGNED: TEAM

DRAWN: TEAM

APPROVED: JBC

PROJECT NO.: 25-037

PROJECT:

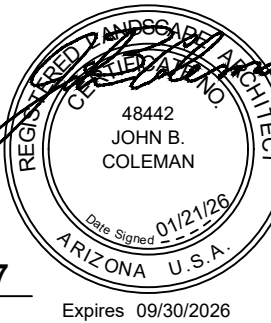

NEW LIFE FELLOWSHIP CHURCH

1712 W BROADWAY RD, MESA, AZ 85202

PREPARED FOR:

VALLEY ARCHITECTURE
1248 N. HILLCREST
MESA AZ, 85201
CONTACT: RON HECHT
602-334-9766

FINAL LANDSCAPE PLAN - DESIGN REVIEW

DATE: FEBRUARY 24TH, 2026

REVISIONS:

NO.	DATE	ITEM

CITY NUMBERS:

FINAL APPROVAL SET

FINAL LANDSCAPE PLAN

L-1.01

SHEET 01 OF 01