


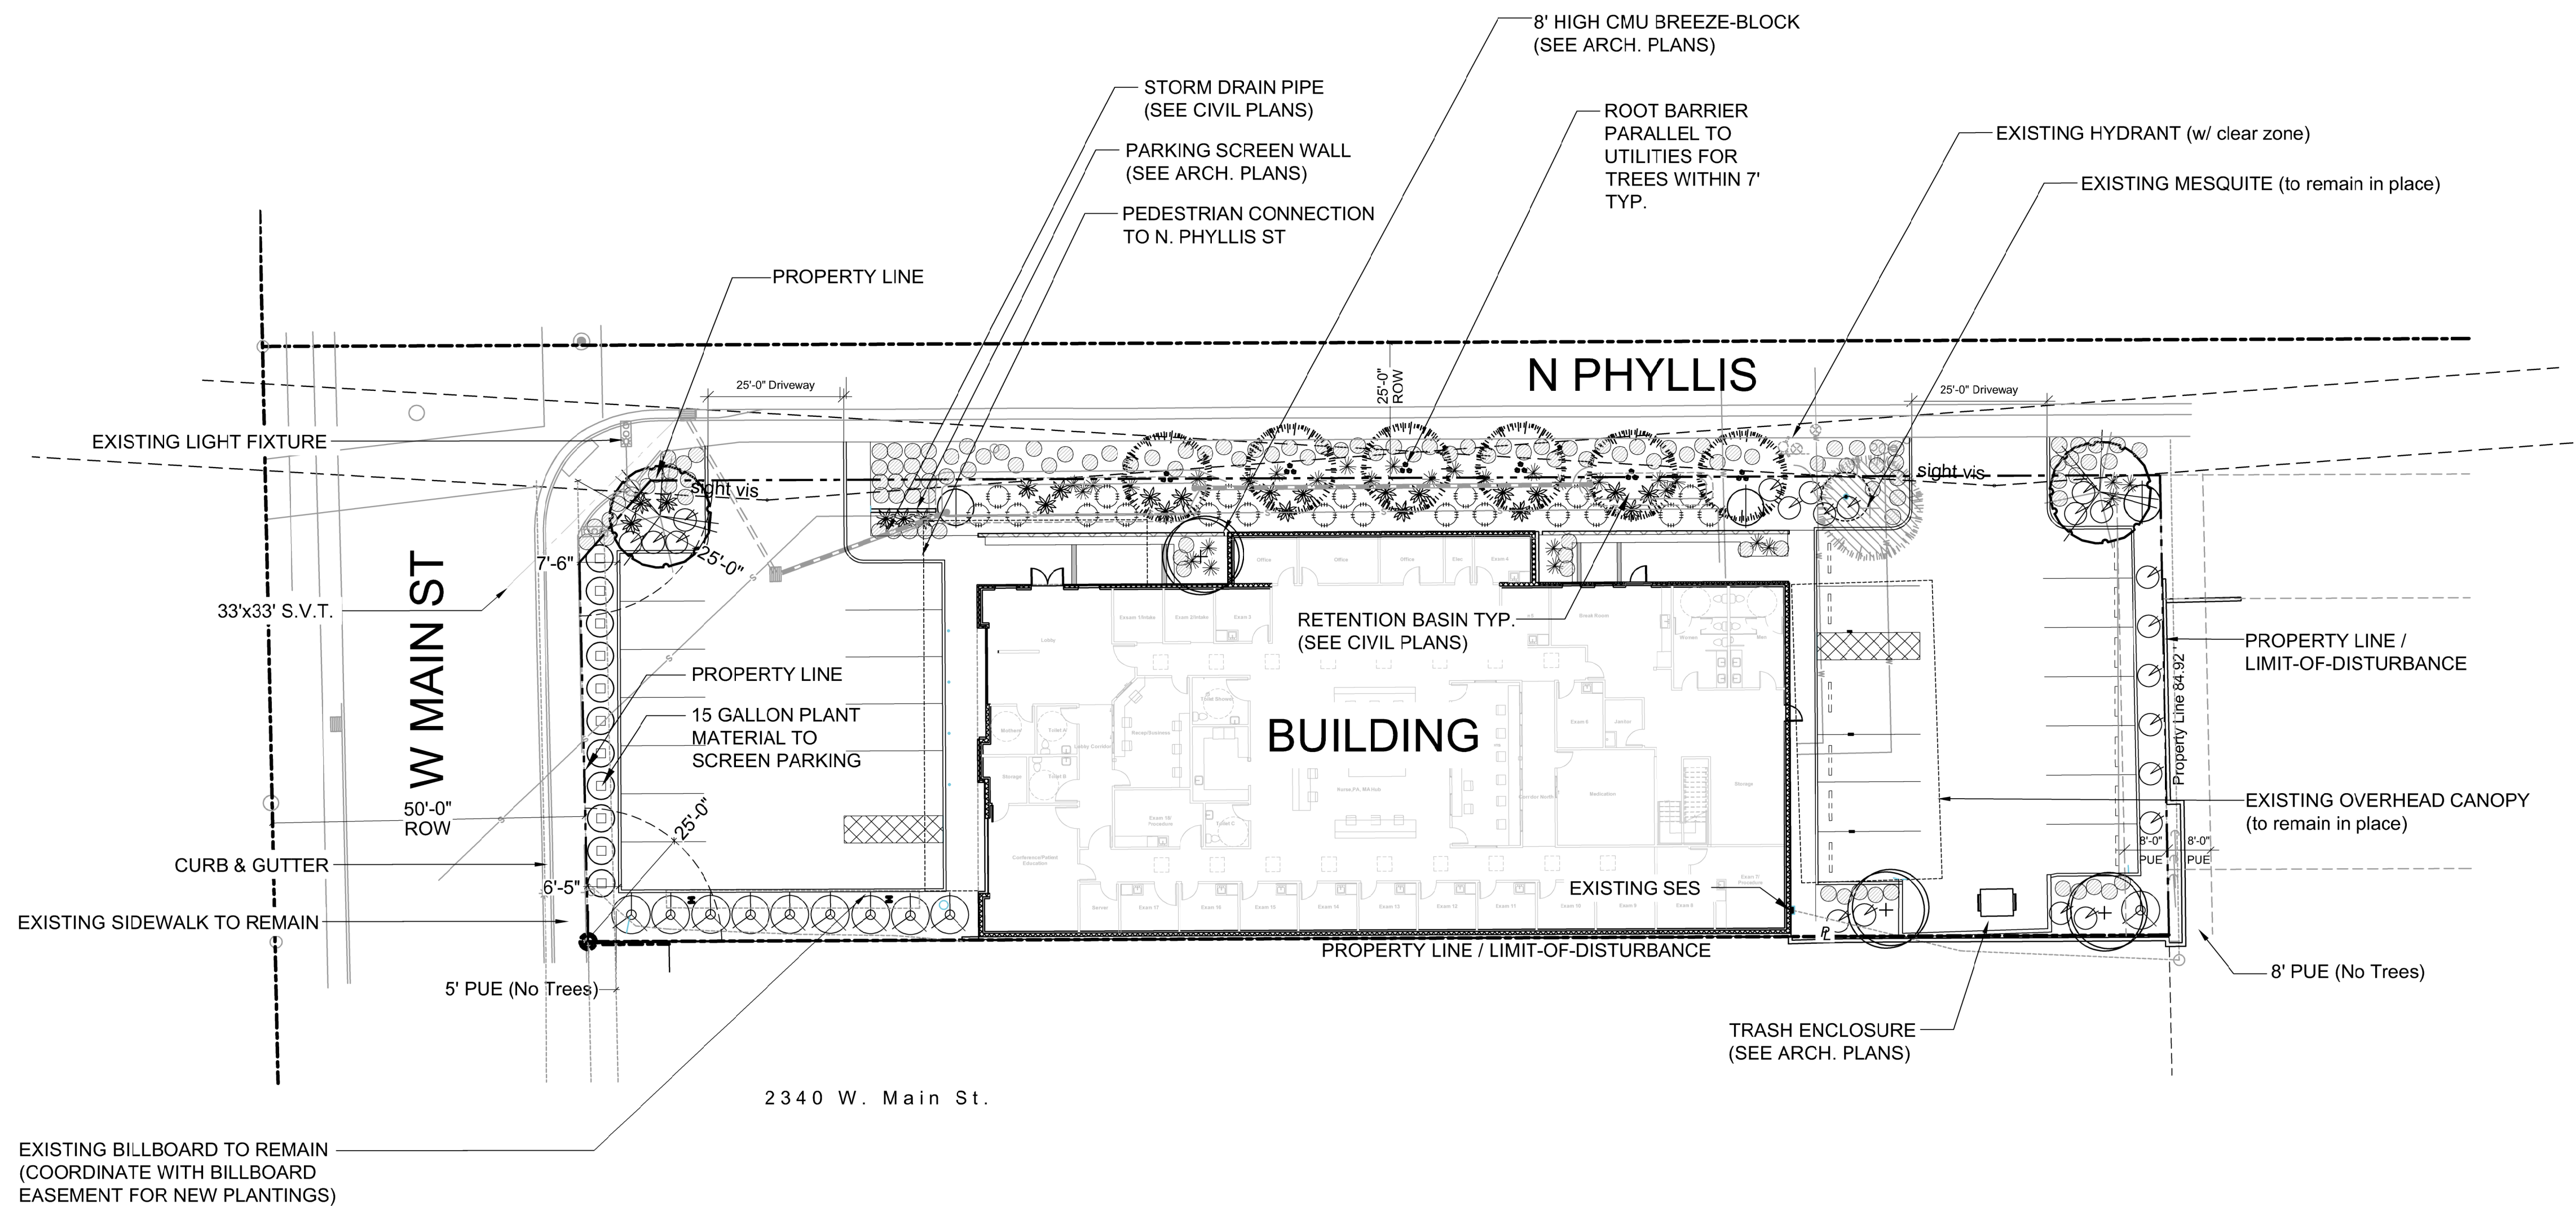


LANDSCAPE DATA	
Gross Site Area:	28,492 S.F. (.654 AC.)
Building Area:	10,056 S.F.
Landscape on-site Area:	5,922 S.F.
TOTAL Landscape Area:	5,922 S.F.



POSITIVE DRAINAGE NEEDS TO BE MAINTAINED FROM THE BUILDINGS EXTERIOR WALLS FOR A MINIMUM OF 10'. NO IRRIGATED LANDSCAPE MATERIALS WITHIN THE FIRST 3' NEXT TO THE BUILDING FOUNDATION. WITHIN 3' OF THE BUILDING FOUNDATION ONLY LANDSCAPE MATERIALS THAT CAN BE IRRIGATED WITH A 1 GPH EMITTER ARE ALLOWED. ANY LANDSCAPE MATERIALS REQUIRING AN EMITTER GREATER THAN 1GPH, INCLUDING TURF SHALL BE A MINIMUM OF 5' FROM THE OUTSIDE FACE OF THE BUILDING FOUNDATION. ALL IRRIGATION LINES, OTHER THAN THOSE SUPPLYING INDIVIDUAL EMITTERS SHALL NOT BE PLACED WITHIN 5' OF THE BLDG FOUNDATION.

Preliminary Landscape Plan

1. The entire site will be maintained in accordance with City of Mesa standards.
2. All trees will be 24" box or larger.
3. an automatic irrigation system will be installed guaranteeing 100% coverage to all landscape areas.
4. Decomposed granite, 2" minimum thickness, to be placed in all landscape areas not designated for rip-rap.
5. All earthwork will be done so that all water drains away from sidewalks, structures and will not impede natural drainage easements.
6. Structures and landscaping within a Sight Visibility triangle or Sight Visibility line will not exceed 24" inches.
7. Final landscape plans to meet or exceed minimum City standards.
8. Quantities are for submittal purposes only.
9. All trees shall comply with the latest amended edition of the 'Arizona Nursery Association recommended tree specifications.
10. Location of all trees in SVT to be surveyed and staked by contractor, locations to be approved by City transportation department prior to install. all trees within SVT to be of a species that when fully mature will have a trunk diameter of under 12".
11. At time of completion, all trees in svt. to be prune to 8' measured from top of curb to bottom of canopy, and 14' ht.as measured from highest point of adjacent pavement.
12. All trees located within SVT to be 36" box x Standard Trunk.

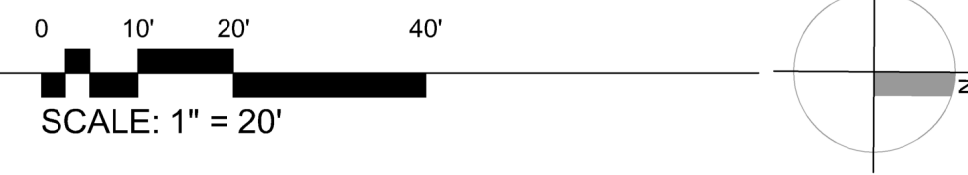

During bid it shall be the responsibility of the Contractor to determine required quantities of plants, as no compensation will be made for error in plant quantities. If plant counts occur on plant legend, it is for the convenience of the contractor only. Verify plant counts with plan. in case of discrepancy, plan shall govern.

TREES		SIZE	QTY
	Prosopis alba Argentine mesquite	48" box, matching	2
	Quercus Virginiana Southern Live Oak	24" box, standard	6
	Caesalpinia mexicana (tree form) Mexican Bird of Paradise Tree	36" box	3
	Existing Mesquite Tree to remain and be protected	selectively trim to 7' canopy	1

<i>SHRUBS</i>		<i>SIZE</i>	<i>QTY</i>
	Muhlenbergia rigens Deer grass	5 gal.	21
	Hesperaloe parviflora 'Yellow' Yellow Yucca	5 gal.	30
	Caesalpinia mexicana Mexican Bird of Paradise	5 gal.	3
	Leucophyllum frutescens 'Green Cloud' Compact Green Cloud Sage	5 gal.	22
	Hesperaloe funifera Giant Hesperaloe	5 gal.	24
	Tecoma stans Yellow Bells	15 gal.	10
	Dodonaea viscosa Green Hopseed Bush	15 gal.	11
	Lantana montevidensis Trailing Lantana 'Purple & Gold Mound'	1 gal	127

INERT MATERIAL	SIZE
	Decomposed Granite-3/4" Screened Rock Pros Mahogany 2" min thickness in all landscape areas
SUBMIT SAMPLES OF ALL INERT MATERIAL TO LA FOR APPROVAL	

TREES	CANOPY SIZE	x	QTY	=	SQFT
Prosopisalba	314 sqft.		2		628
Argentine mesquite					
Quercus Virginiana	254 sqft.		6		1,524
Southern Live Oak					
Caesalpinia mexicana (tree form)	176 sqft		3		528
Yellow Mexican bird-of-paradise					
Existing Mesquite Tree	314 sqft		1		314
to remain and be protected					

<u>TOTAL</u>	<u>SQFT</u>	<u>%</u>
Total Square Footage of Site: 28,492	2,994	10.5%



LASKIN & ASSOCIATES, INC.
LANDSCAPE ARCHITECTS August 7, 2025

5013 E. Washington St.
Suite 110
Phoenix, Arizona 85034
p (602) 840-7771

PL-01

www.laskindesign.com

ST. VINCENT de PAUL
2352 W. Main St., Mesa AZ